

The Oldest American Heronautical Magazine

Sth Annual Maintenance Issue

1944 MAINTENANCE CHAMPS

United Air Lines and Chicago & Southern win industry's most highly prized awards for the men-on-the-ground who keep 'em flying by hard work, new techniques.

SPECIAL SERVICE SECTION

Ten practical how-to-do-it feature articles of industry-wide value, plus 15 pages of AVIATION'S inimitable Maintenance Notebook hold the spotlight.

COMPRESSIBILITY

Republic's chief aero-dynamicist clears the air on basic problems.

TURBINES FOR SUPERPOWER

Where are we going — where should we go — with jet propulsion?

YOUR OWN PLANE MARKET

How dealers can forecast potential sales and profits in selected territory,

McGRAW-HILL
PUBLISHING COMPANY, INC.



Fast, tough and heavily armed, the

Douglas Invader - A-26 - wraps up in

one package the lessons of five years

of attack bombing. Just as fast and

tough are its dependable Hydromatics.

HAMILTON STANDARD PROPELLERS

EAST HARTFORD, CONNECTICUT

ONE OF THE FOUR DIVISIONS OF UNITED AIRCRAFT CORPORATION



An Eternity of Twenty Seconds

WHAT caused the ship to explode no one will ever know. One moment the bombardier was peering down at England three miles below-an instant later he was enveloped in a flash of flame and the B24 Liberator was breaking up in midair. He dived through the door in the nose compartment but his parachute caught on a cable and he hung, fighting desperately to climb back as the disintegrating ship plummeted down. Somehow he managed to pull himself up far enough to free the cable from his chute and dropped-now less than 1,000 feet from the ground. He landed hurt, but safe-one of only two survivors out of the crew of ten.

Before his enlistment, this bombardier was one of our younger employees in our Replacement Parts Division, typical of the fine type of up-and-coming American boys who are hand-picked by Thompson for training and development into positions of trust and responsibility.

In a letter to his former department head, he says,

"Only by the grace of God I escaped, The shock of the loss of those wonderful companions in our crew, I can't get out of my mind. Their screams still ring in my ears . . . I wish the people back bome could realize the terrific turnover of materiel and supplies over here. Maybe then we wouldn't read some of the things that make us wonder . . . "


The workers at Thompson truly have had a part in every bombing raid their former fellow worker has flown, for many of the 1,000 different aircraft parts and accessories made by Thompson go into the American Liberators, Fortresses and the U. S. fighting planes that fly with them as protection on their missions. Since Pearl Harbor not one bour's production time has been lost.

Yet, all we may do is so little compared to the risks, the sufferings and sacrifices our boys overseas are making. Someday we shall welcome these boys back. Only by giving them every ounce c support now can we then look them in the eye and grip their hands in honesty and sincerity.

Beating Production Schedules on Vital Parts for Planes, Tanks, Submarines, PT Boats, Torpedoes, Jeeps, Half-Tracks, Tractors, and Trncks



MANUFACTURERS OF AUTOMOTIVE AND AIRCRAFT PARTS . GENERAL OFFICES: CLEVELAND . PLANTS IN ONIO, MICHIGAN, CALIFORNIA, AND ONTARIO, CANADA

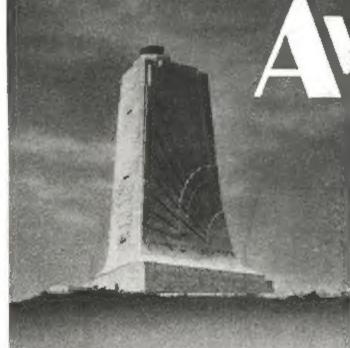

George W. Pfail Publisher	Leslie E.	
John Foster, Jr Herb Powell Edward E. Thorp	Associate Assistant	Editor Editor
rving Stone	Assistant	Editor

Raymond Hoadley West Coast Editor Wm. R. Nelson. Blaine Stubblefield. Washington Editor

On leave of Absence With Government Services Carl Norcross Colonel, Air Forces Charles F. McReynolds ... Major, Air Forces Jay P. AuWarter Majar, Air Forces Randolph Hawthorne.... Captain, Air Forces Kenneth D. Reynolds Lieutenant, Infantry David Baker Private, Air Forces Special Assignment Don Fink.....

* * *

Andrew B. Martin, Sales Manager

District Managers: Boston, Hunter Snead; New York, Robert F. Boger; Philadelphia, C. M. Edler and E. M. Schellenger; Claveland, A. H. Bartsch and R. S. Cobb; Detroit, C. W. Evaul; Chicago, A. E. Meanor; St. Louis, W. E. Donnell; Los Angeles, E. W. Potter; San Francisco, John Otterson,

McGRAW-HILL PUBLISHING CO., INC. Publication office 99-129 North Broadway, Albany, N. Y. Heturn postage guaranteed. Editoriat and encotive offices; 330 West 42nd Struct, New York, 18, N. Y. Branch offices: Chicago, 529 North Michigan Ave.; San Francisco, 68 Post Street; Aldwych House, Aldwych, London, W.C. 21 National Press Bildg., Washington; 16 South Broad St., Philadelphia; Hanna Bildg., Chereland; 2-144 General Mators Hidg., Detroit; Paul Brown Bildg., Chereland; 2-145 General Mators Hidg., Detroit; Paul Brown Bildg., Chereland; 2-145 General Moora Hidgs., Detroit; Paul Brown Bildg., Arlanta; 621 S. Hope, Los Angeles; 738-9 Oliver Bildg., Phitsburgh, JAMES H. McGRAW, Founder and Homoraey Chairman; JAMES H. McGRAW, Founder and Homoraey Chairman; JAMES H. McGRAW, Frendent; HOWARD EHRLICH, Executive Vice-President for Business Operations; JOHN ABBINK, Executive Vice-President for Editorial Operations; CHETIS W. McGRAW, Vice-President and Treasurer; JOSEPH A. GERARDI, Secretary; J. E. BLACKHURN, Jr., Director of Circulation, Aviation, 330 West Paul Street, New York Published monthly, price 56c a copy, 50c in Canada. Allow at least ten days for change of address. All communications about subscriptions should be addressed to Director of Circulation, 330 West 42nd Street, New York, Subscription rates—United States, Mexico and Central American Countries, \$3,00 a year, \$4,00 for two years, \$6,00 for three years. Canada, \$3,30 for one year, \$6,00 for three years. Canada, \$3,30 for one year, \$6,00 for three years. Canada, \$3,30 for one year, \$6,00 for three years. All other countries, \$5,00 a year, \$10,00 for two years, \$6,00 for three years, and other countries, \$5,00 a year, \$10,00 for three years. Entered as second-class matter September 3, 1936, at the Post Office, Albany, New York, under the Act of March 3, 1879, Yohune 43, Number 12, Printed in U. S. A. Cable Address: "McGraw-hill New York," Member A.B.C. Copyright and may not be reproduced without the permission of the cepyright owner, The following publication



Rhodes R. Rule and John F. L. Bate 178

Volume 43 • Number 12

Briefing for December	5
Down the Years in Aviation's Log	5
Editorial: Progress Has Been Made	115
Gas Turbines for Tomorrow's Superpower G. Geoffrey Smith	116
This Is Our Air Policy - So Far	119
Keep Those Contract Schools Going Earl D. Prudden	120
Marketing	
Here's Your Local Market Frank S. Christian Hang Your Shirt On a Star	122 125
SPECIAL MAINTENANCE SECTION (See full table of contents on page 127) Ten comprehensive feature articles. Beginning on page 130 Fifteen pages of AVIATION'S unmatched	,
Maintenance Notebook Beginning on page 155	;
PLUS	
AVIATION'S Maintenance Awards for 1944-	
To United Air Lines	3
To Chicago & Southern Air Lines).
	_
Aviation Research—Engineering—Production	
Compressibility Calls a Challenge Costas Ernest Pappas	171
Pre-Viewing Tomorrow's Metal Designs Chester S. Ricker	176

Plant-Practice Highlights 180 Aviation's Engineering Data Book 207 Aviation's Sketch Book of Design Detail New Products and Practices 241 Flying Equipment Boeing's Model 377 Stratocruiser 181

Heavy Duty Runway Built by New Techniques


ur Iransport			
Give Operators More Cruise Control			
When You're Planning Payloads-	James J.	. Heatley	1
inance			

Aircraft Stock	ks Climb Out of	Bear Pit.	Raymond L.	Hoadley 1
Ailitary				
Repairing 'Re	ound the World			

И Ор	erat	ioi	ns .							
ervice	and	1	Paintbrusk	Bring	and	Hold	New	Business William	D. Strohmeier	194

BOOK MESIEWS	206
Side Slips	239
The Avietics Moure	

The Aviation News			
National Aviation	217	Transport Aviation	227
War Communique No. 36	221	Aviation Abroad	233
Washington Windsock	223	Financial Notes	235
Aviation Manufacturing	224	Aviation People	237

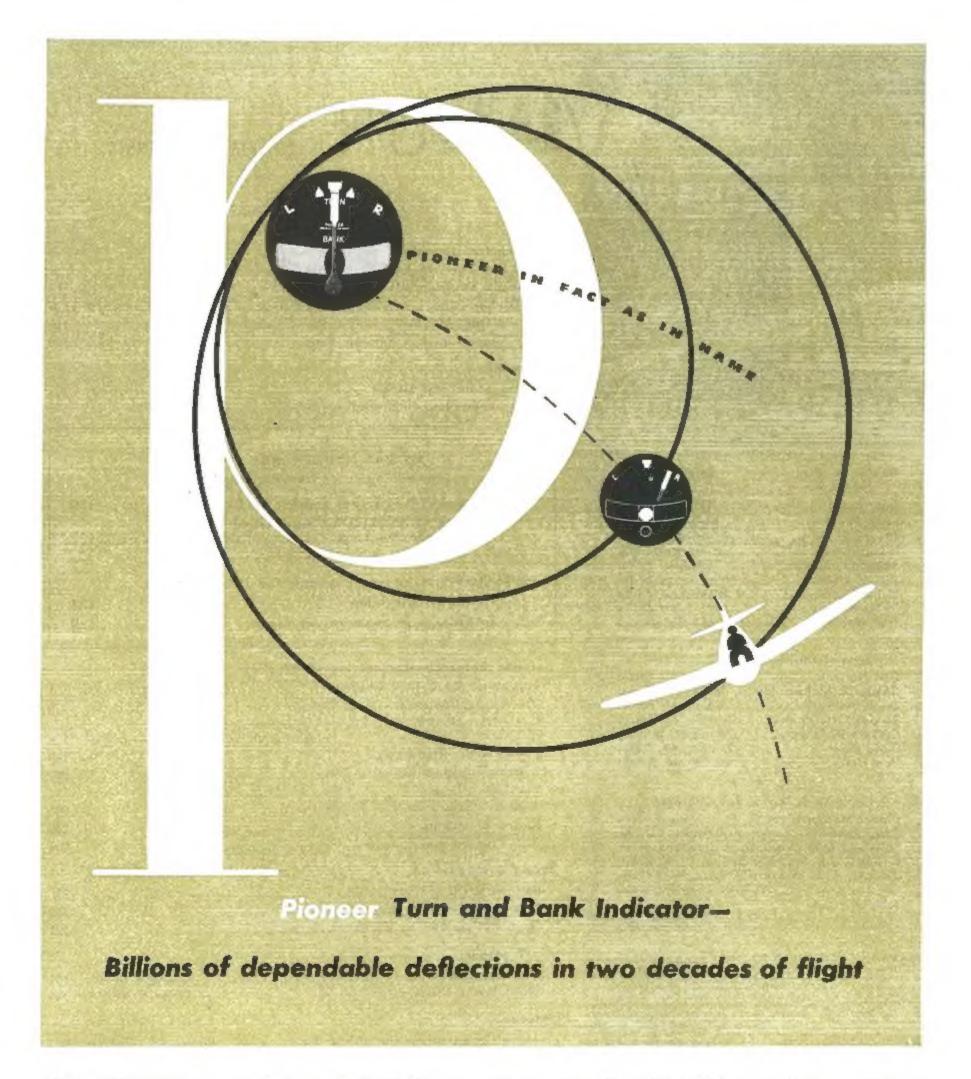

A Pioneer "first" we are particularly proud of is the Pioneer Turn and Bank Indicator, Almost twenty years ago the first turn and bank indicator was manufactured and sold by Pioneer. This sturdy member of the Pioneer primary flight-security group has provided steadfast indications of rate of turn and lateral stability for hundreds of thousands

of pilots throughout the world. Its rugged design and closetolerance calibration have meant dependable readings through literally billions of pointer deflections, earning the admiration of flying and service personnel everywhere -another tribute to the Creative Engineering-plus principle which guides Pioneer.



Bendix and Pioneer are trademarks of Bendix Aviation Corporation

AVIATION, December, 1944

Briefing for December

Eight years ago AVIATION initiated its Maintenance Award - the first such recognition to be given those unsung lads who then were generally referred to as grease monkeys. Purpose of the award then, as now, was to encourage more efficient maintenance procedures and developments and to give recognition to the men on whom so much of air transport's magnificient record and progress depends. This year, the judges report. the pleasant task of making this oldest award was the most difficult ever-"because everybody's doing such a hell of a swell job." But they cast their ballots, and up came the '44 champs: United and Chicago & Southern, whose citations you'll find on pages 128 and

Since maintenance knows no barriers, we've enlarged the scope of the special section this year, and in the ten feature articles and thirty illustrated Maintenance Notebook items there are practical easy-to-adapt ideas from the manufacturing, military, component-parts, and fixed base fields as well as the airlines. And to make it easier to locate them all, you'll find a special Maintenance Section Table of Contents on page 127.

6. Geoffrey Smith, editorial director of the English magazines Flight and Aircraft Production, is one of the pioneer gas turbine and jet propulsion advocates and also one of the most prolific writers on these increasingly important subjects. With the knowledge that the industry well understands the principles of turbine power, he goes on from there to analyze the problems which remain to be solved and gives several new thought provoking angles opening new avenues of development to the alert engineer. Page 116.

Three important new airplanes are announced-two American and one British. Initial specifications of Boeing's Model 377 Stratocruiser, transportversion of the B-29 Superfortress, a tremendous craft with just as tremendous potentialities, together with illustrations, are on page 181. The other American craft is for the personal plane field-Republic's four-place amphibian, an unusual and mighty interesting design, detailed and illustrated on page 182. The British job is Handley Page's bid for postwar transport markets, the four-engine Hermes; the specifications and illustrations will be found on page 183.



COSTAS ERNEST PAPPAS, chief of gerodynamics for Republic Aviation Corp., and 1943 winner of the Wright Brothers medal for outstanding contribution to the field of aeronautical engineering, knows that compressibility is not a hazy theoretical problem to be conquered sometime in the future—he knows it's already facing as today as a challenge to every design and production engineer. In his pointed article, beginning on page 171, he makes an important contribution to the literature in this ever-more-important field.

So many people have used our study "Here Are Your Markets" (May, June, and July AVIATION) to advantage that we couldn't quit giving such serviceable articles even if we wanted to. By way of proving we will continue with this type of survey, we present "Here Are Your Local Markets" by Frank S. Christian (page 122). It

not only tells the dealers and distributors just how to make accurate market studies in any given territory, it also gives a thoroughly workable merchandising plan to exploit that territory most efficiently and economically.

Our Transport section this month features two Jims, both veterans who really know what they're talking about. Jim Rea, Convair engineering test pilot, has an article on page 184 that's of as much interest to the aircraft manufacturer as to the airline operator. for he goes into the latter's need for basic test-flight data, much of which could come from the plane producers. The other Jim-Heatley, American Export operations engineer-presents a straightforward article which also has a two-way value, for on page 186 he details a fuel-weight evaluation that takes into consideration the many elements which upset flight economy, and "When You're Planning Payloads" these factors really get important.

With a lot of people foolishly thinking the war's practically over, it's no wonder an even greater number are forgetting the superb and desperately needed pilot-training job our civilian contractors did to train pilots for the world's greatest air force. That's why now is the time to give them the recognition they deserve and, more important, keep them as a permanent part of the training establishment. Turn to page 120, where Earl D. Prudden says "Keep Those Contract Schools Going."

Down the Years in AVIATION'S Log


25 Yr. Ago (1919) -All airmail records broken between N. Y. C. and Washington by deHavilland plane, which carried 630 lb. over the 218 mi. în 1 hr. 34 min. . English initiate airmail to Belgium, Holland, Norway, and Denmark. . . First aero show in West is opened in Chicago.

15 Yr. Ago (1929) - Comdr. Byrd flies Ford Trimotor over South Pole. . . . Los Angeles judge dismisses suit against airman who flew low, saying "Railroads are as noisy and perhaps as dangerous." . . . Costes and Bellonte fly 4,902 mi. non-stop from France to Manchuria . . . Pres. Hoover asks Congress for \$33,000,000 for Air Service . . . Moth plane takes off from top of moving auto at Orchard Beach . . . Caproni 6-engine bomber with 150 ft. span, flies 138

mph. with 9-ton bomb load. Chilean Army buys two Ford Trimotors. . . Los Angeles holds first glider meet.

10 Yr. Ago (1934) -- TWA makes

Floyd Bennett Field its N. Y. terminal. . . EAL DC-3 flies Los Angeles-Newark run in 12 hr. 3 min. at 216 mph. . . Same EAL plane makes N.Y.C.-Miami 2,400-mi, round trip in 14 hr. 55 min. . . Panam projects California - Honolulu - Manila -China route with Sikorsky S-42's. . . . First French full-scale wind tunnel built at Chalais-Meudon, . . Autogiro lands on N.Y.C. East River pier. , . Total of 1,285 planes built in U. S. in first 9 mo. of yr., 21 percent gain over 1933. . . Stinson delivers 600th fourpassenger plane. . . Private flying ban lifted in Canal Zone.

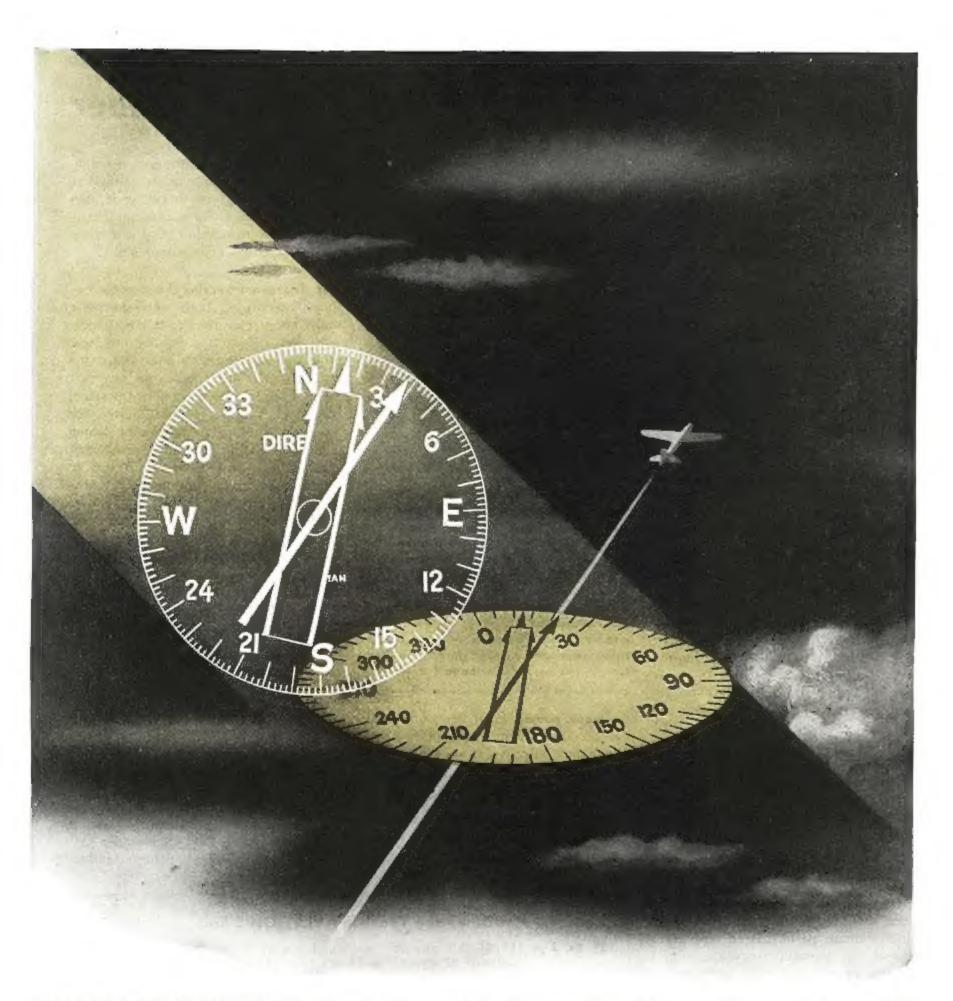

SIMPLIFIED COMPASS INDICATION for the pilot is one of the features of the Kollsman Direction Indicator. This new direct reading, easy-to-read, easy-to-follow compass has a convenient reference pointer that can be set to the desired course making it necessary only to "match pointers." It is regarded by many pilots as one of the greatest steps taken to simplify cross country navigation for the pilot. For an illustrated folder on this original Kollsman development, write Kollsman Instrument Division, 80-08 45th Avenue, Elmhurst, New York.

GLENDALE, CALIFORNIA

AVIATION, December, 1944



ELMHURST, NEW YORK









PLANE ON GROUND.

KEEP STICK


3-POINT LANDING

Coming Air Age" illustrates and de-

scribes various types of landing facilities. It will

munity plan an inexpensive land-ing grea now! For

your copy, write Dept. A124W.

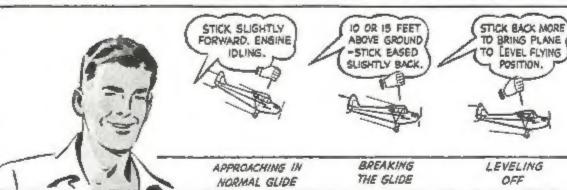






GET YOURS NOW!

This FREE Booklet Will Help Your Town Plan Landing Facilities!




STICK EASED WAY BACK TO

PLANE SETTLES

PIPER "PLANE QUIZ"

- What is the cost of a New York to Chicago trip in n Piper Cub? Less than \$10 for gas and oil.
- 2. How far can you fly non-stop in a Over 700 miles in same models.
- At what speed does a Piper Cub land? A) as little as 30 miles per hour.
- How long does it take to learn to fly a Piper Cub?





NOTE: This lesson explains only the

NOTE: This lesson explains only the fundamentals. Keep it with the others that follow. See your Piper Cub dealer for actual flying instruction. Write us for actual flying instruction. you want oppose one of the fundamental superior of the fundamental flying instruction.

PIPER AIRCRAFT CORPORATION

LOCK HAVEN, PENNA.

Points the Way to Wings for ALL Americans

GOOD YEAR AIRCRAFT PRODUCTION REPORT



CONTRACTS: 78121, NO a (1) 257, N 2885 -17654

NAVY "K" TYPE AIRSHIP

133 COMPLETED AIRSHIPS

OCTOBER 1940

DESIGN CONTRACT RECEIVED:

FIRST PRODUCTION UNIT DELIVERED: SEPTEMBER 1941

50™ PRODUCTION UNIT DELIVERED:

MARCH 1943

CONTRACTS COMPLETED:

APRIL 1944

Remarks: These contracts marked first use of production-line technique in airship construction. Only company with veteran staff of airship-construction engineers, Goodyear was able to use thirty years' aeronautical experience to develop structural innovations making for greater speed, strength, range in these guardians of the sea lanes. No escorted vessel has been lost to submarines while convoyed by "K"-type airships.

Goodyear builds components for 16 different Army-Novy-type aircraft, including complete Corsair fighters and airships.

HOW GOODYEAR AIRCRAFT CORPORATION SERVES THE

turers' specifications.

1. By constructing sub- 2. By designing parts 3. By re-engineering 4. By building complete assemblies to manufac- for all types of airplanes. parts for quantity pro- airplanes and airships. duction.

AIRCRAFT INDUSTRY

5. By extending the facilities of Goodyear Research to aid the solution of any design or engineering problem.



GOODYEAR AIRCRAFT CORPORATION

Akron, Ohio

Litchfield Park, Arizona



1 IT'S LIGHTEST IN WEIGHT

The simple, compact assembly, fitted within a magnesium wheel, makes this new Goodyear contribution to aircraft advance the lightest high-power brake unit.

2 IT'S SUREST IN ACTION

Large steel disc rotates between two rugged brake shoes, mounted in unique clamp which applies smooth, equalized pressure, with ample reserve power - making this the surest action brake. Brake disc is mounted flush with wheel rim, exposed to slip stream, insuring rapid heat-dissipation and longer brake-lining life longer service.

(1) IT'S EASIEST TO SERVICE

With fewer parts than other brakes, the Goodyear Single Disc is the easiest brake to service. Relining takes only a few minutes, requires no special tools.

This standout brake is made in hydraulic and mechanical types, both awarded Approved Certificate. Now available in sizes for all types of aircraft.

Our engineers will be glad to advise you as to whether the Single Disc or its famed companion, the Goodyear Multiple Disc Brake, is best suited for the operational requirements of your aircraft.



WHAT'S NEW IN RUBBER FOR AMERICAN AIRCRAFT





Goodyear exhaust ducts are built to conduct cooling air and exhaust gases from an auxiliary power plant to the outside of the airplane. Excess temperatures are their mear, a 5-inch duce, for instance, withstanding a maximum of 225 degrees F.

BUY WAR BONDS & BUY FOR KEEPS



RUBBER HEADQUARTERS CAN FIND THE ANSWERS

Backed by the resources of the finest laboratory in the industry, and more than 30 years' experience in develop-ing airplane tires, tubes, wheels, brakes and other accessories, Goodyear engineers invite your consultation on any problem. Address: Goodyear, Aeronautics Dept., Akron 16, Ohio or Los Angeles 54,

11

COLD

Goodyear medium-pressure hydraulic hose for landing gear and similar connections is constructed so that it will remain flexible, and withstand the impulsing pressures and bending even at temperatures of 65° below zero. It is built of a special synthetic tube designed for handling of hydraulic brake fluids and low-temperature oils.

TUBES . WHEELS . BRAKES


AERONAUTICAL RUBBER GOODS .

AVIATION, December, 1944


AVIATION, December, 1944

TIRES

Eclipse REVERSE CURRENT CUTOUTS

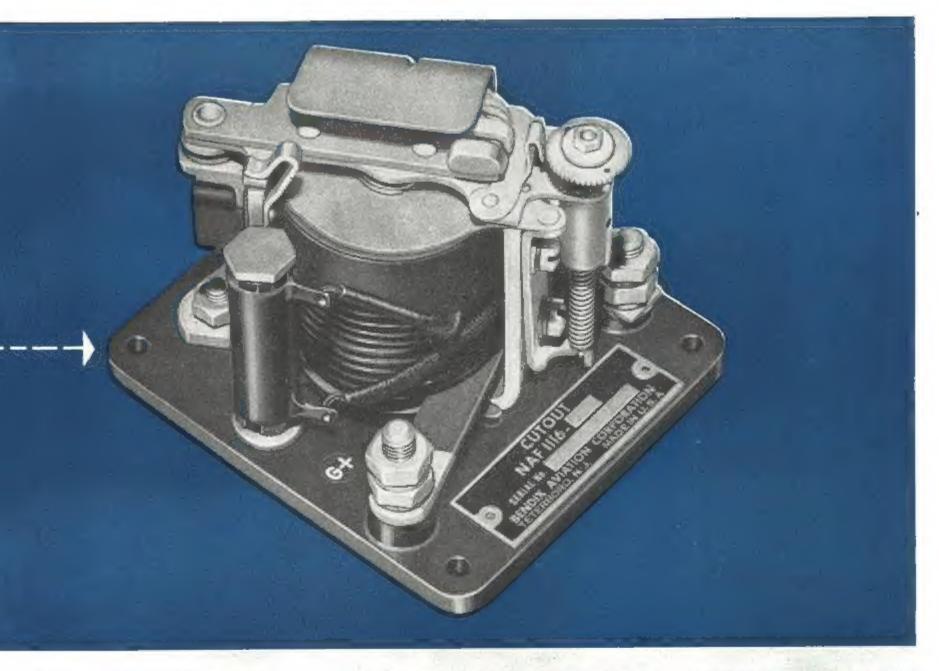

Automatically prevent reverse flow of current

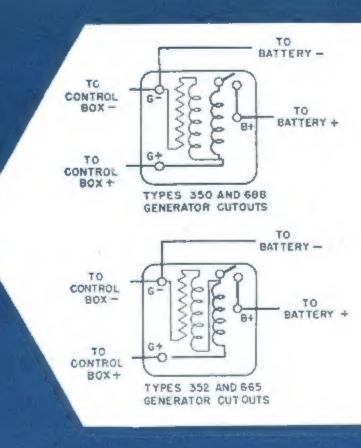

DESIGN CHECK CHART FOR ECLIPSE REVERSE CURRENT CUTOUTS

APPLICATION:

- Eclipse Reverse Current Cutouts are designed to prevent the reverse flow of current to generators in aircraft power systems utilizing batteries and generators as a power source.
- Properly installed in the Aircraft Power Supply System, they provide a compact, lightweight means of automatically disconnecting generators from electrical systems when generator voltage drops below system voltage.

PERFORMANCE:

Felipse Reverse Current Cutouts automatically open on reverse flow of current* from battery to generator when generator output voltage drops below system voltage. They also operate as generator automatic main switches.

Eclipse	Current-	Volh	Setting	*Opening Reverse	Weight	Dime	nsiens —)	nches
Тура	Amperes	D.C.	Volts	Current —	Lbi.	Width	Length	Heighi
350	25	15	13.5 + .1	3	.82	213/4	213/4	21/4
352	100	15	13.5-11	5	1.63	314	334	2%
688	25	30	26.7+.1	3	.82	215/4	215/4	21/4
665	100	30	26.7+.1	5	1,63	31/4	314	2%

DESIGN FEATURES:

- Changes in Cutout temperature have minimum effect on operation.
- ✓ Operate satisfactorily in any mounting position when adjusted in that position.
- Armature leads on Types 352 and 665 are shielded to prevent change in Cutout setting through handling.
- Silver alloy contacts have long life and low voltage drop.
 Adjustment knob is conveniently accessible and auto-
- matically locked.

 Lightweight and compact.

THIS MONTH BUY AT LEAST AN EXTRA \$100 WAR BOND




Eclipse

Eclipse-Pioneer Division

AVIATION ACCESSORIES

Bendix

AVIATION CORPORATION

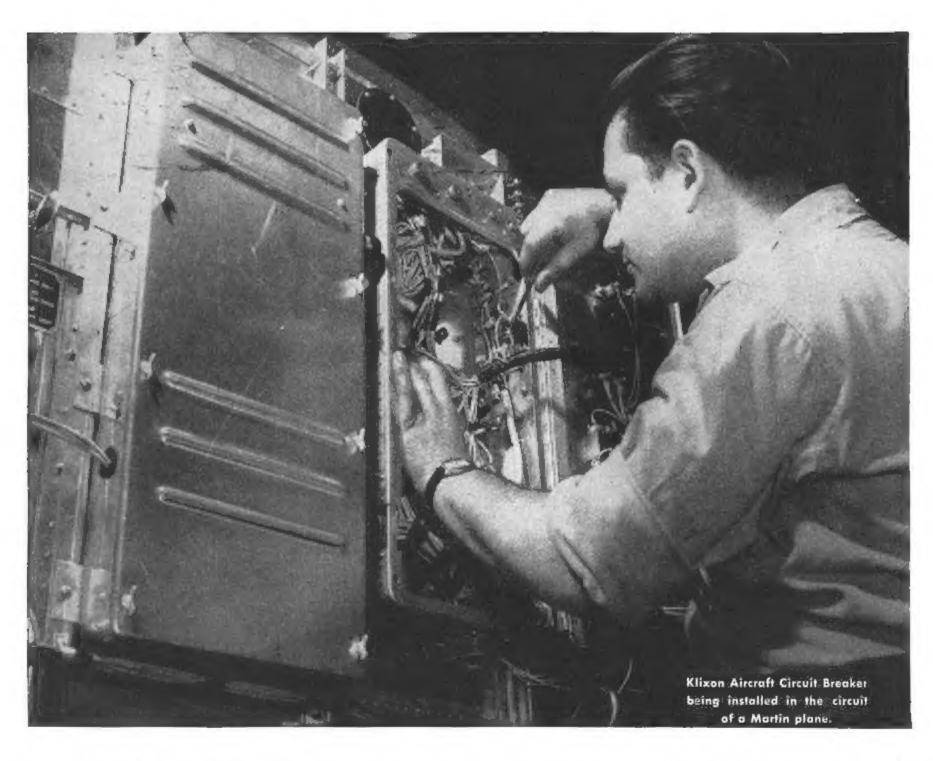

KLIXON AIRCRAFT CIRCUIT BREAKERS

keep electrical circuits HEALTHY in the Marauder and PBM Mariner

> To protect planes and crews from electrical circuit troubles

in the famous B-26 "Marauder" and PBM "Mariner", Martin engineers specify and use Klixon Aircraft Circuit Breakers. The reasonbecause like these famous planes, Klixon Breakers are built to take it with plenty to spare.

Small, lightweight and compact, Klixon Aircraft Breakers perform accurately and efficiently in all ranges of altitude . . . tripping-out the circuit should a short or sustained overload jeopardize

the electrical system. As soon as the trouble is remedied, the pilot pushes a button or snaps a switch and the circuit is re-established.

Protect the electrical system in your planesinstall Klixon Aircraft Breakers in all circuits. They're available in all types . . . switch, pushpull, automatic reset, remote control and others. Bulletins give sizes, weights, dimensions and performance characteristics and are available on request.



ONE was the violence, the ferment and I fury of the great hurricans of mid-September, 1944. But in the fair weather week that followed, stark drama in the train of the big wind had not yet reached its finale. Nor had the hazard to precious lives still in

Four days after the hurricane's sweep up the Virginia coast, on Tuesday, Sept. 19th, nineteen desperate men clung perilously to life rafts in the treacherous waters off Cape

These were the survivors of a crew of 41 Guard Cutter Jackson. Now, worn to extreme exhaustion after 58 hours of exposure in the shark-infested waters, many of them bearing severe and painful welts from the stings of giant jelly fish, these gallant men had little to buoy their fast-ebbing strength except the abiding sense of duty well done.

Their ship had gone down three days earlier. A United States merchantman, on its maiden


But help was coming to the nineteen that day. Their buddies were on the job. From the Coust Cuard Air Station at Elizabeth City, North Carolina, Kingfisher Scout-Observation seaplanes had been on ceaseless patrol. Coast Guard methods are thorough. Systematically, its planes and ships comb every square mile of our vast ocean fronts. So the great moment came at last to the brave men of the Jackson-the moment of discovery and swift aid,

First one, then three Kinghshers alighted alongside the little flotilla of bobbing rafts. who had manned the 125-ft, U. S. Coast A Navy blimp, hovering overhead, dropped urgently needed supplies. Emergency treatment was quickly and capably administered

by Kingfisher crews. Some men were brought aboard the little planes and made as comfortable as possible sprawled out on wings or placed in after-cockpits. Coast Guard launches were promptly summoned and, soon, the Jackson's men were speeding to Norfolk, for hospitalization and recuperation.

The deadly hurricane found the men of the U. S. Coast Guard ready to meet the challenge . . . ready, if need be, to give their lives so others might live. But thanks to the famed "mercy ships of the air"-Edo float-equipped Kingfisher Scouts in the hands of skilled Coast Guard pilots-the toll of brave lives was less than it might well have been.

Out of the Hurricane!

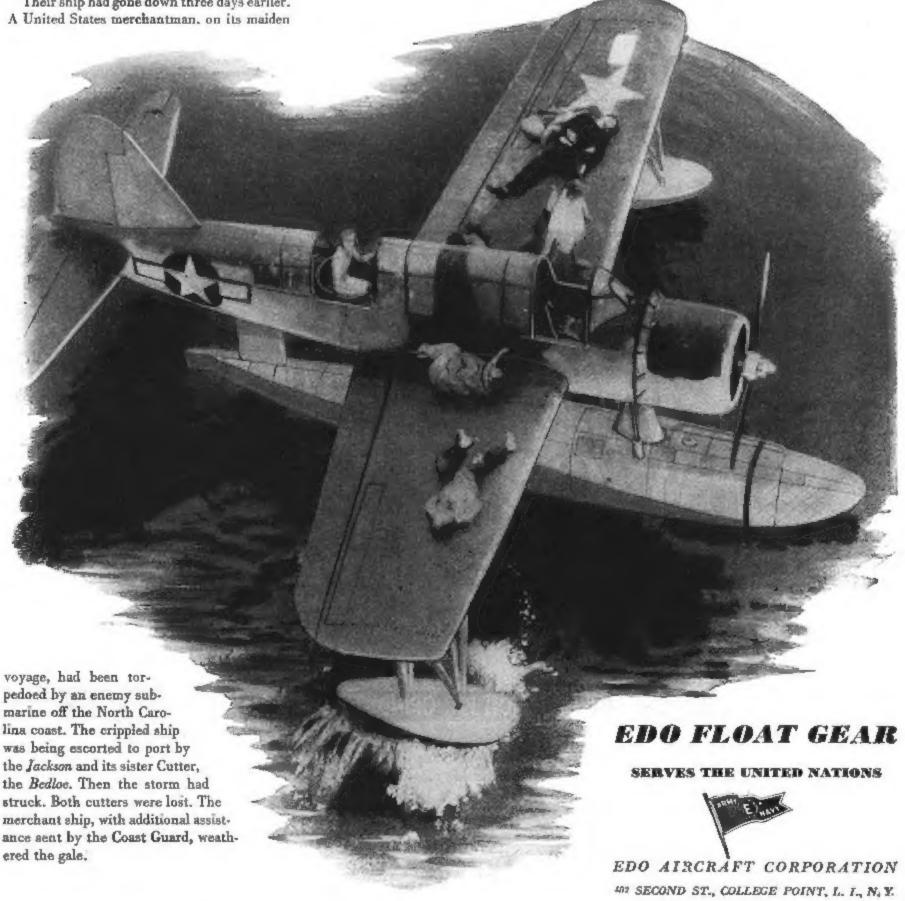

AVIATION, December, 1944

Only Carpenter offers this -Way Program.



TO REDUCE UNIT COSTS

by Better Tooling




SAFER METHOD OF SELECTION.....

A method of tool steel selection that reduces inventories and quides you to the tool steel that will give you maximum tool life for a specific job. Saves tool room time and helps you to plan your tool performance.

BETTER HARDENING RESULTS.....


Definite help in overcoming hardening troubles, cracking, size change, distortion, and premature service failures that contribute to excessive tool costs and production holdups.


16



MORE PRODUCTION PER GRIND.....

First-aid procedure for curing tool-caused interruptions to machine output. Tools that stay on the job longer between grinds, mean fewer shutdowns and lower unit costs.

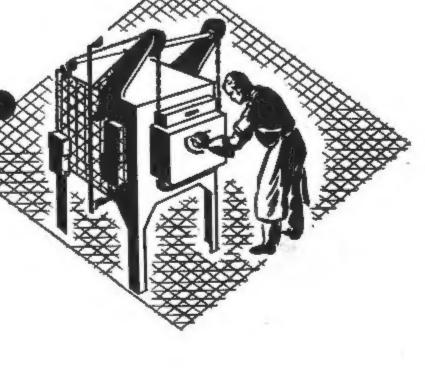

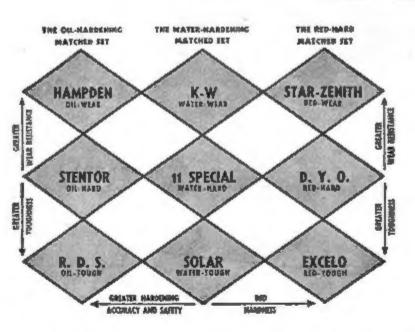

Key to the Carpenter program of cost reduction -simplified selection with Carpenter Matched Tool Steels—and a method that guides you to maximum tool life.

Your company along with many others is faced with the problem of finding new ways to cut unit costs. Reconversion and competition will make it necessary. Better tooling is one very good way to show quick results.

The Carpenter 3-way program makes it easy to get better tooling fast—and bring about savings in tool costs and production costs. War plants found this program a life saver in boosting war output. Now, this same program will help to speed reconversion and bring needed cost reductions.

SELECTION OF TOOL STEEL ON PERFORMANCE The Carpenter Matched Set Method simplifies selection. It guides you to the proper tool steel for each job-the steel that will give you the required combination of properties for maximum production performance. You can actually predetermine performance when you work with Carpenter

COMPLETE HEAT TREATING PROCEDURE Clear, simple, easy-to-follow, printed instructions are provided for heat treating each Carpenter Matched Tool Steel, to get the desired results. A new slide chart with this data is now supplied for your heat treaters. Proper heat treatment assures safe hardening and savings in

tool making costs.

Matched Tool Steels.

CHECK ON TOOL LIFE AND OUTPUT PER GRIND

Here is the big opportunity to cut unit costs. Find out which tools and dies need frequent regrinding, or which fail prematurely in service. Every time machines and presses must be stopped to tinker with tools—it interrupts output and raises unit costs. Carpenter Matched Tool Steels can help you lick this condition, and reduce unit costs.

How to get started on this cost reduction program: Send for the Matched Tool Steel Manual. It contains heat treating instructions for each steel, and an 80-page tool index and steel selector. Write for a copy today on your company letterhead findicating your title. (Free to tool steel users in U.S.A.)

THE CARPENTER STEEL COMPANY . 128 W. Bern St.; Reading, Pa.



arpenter MATCHED *** TOOL STEELS BRANCHES AT Chicago, Cleveland, Detroit, Hartford, St. Louis, Indianapolis, New York, Philadelphia



WE KNOW that when tail-pipe assemblies were handling temperatures up to 1200°F., the U-S-S Stainless Steel developed by our metallurgists-of which they were made-retained the strength needed for this high-pressure job at 1650°F.

We know that turbo-superchargers, which spin their fans at more than 21,000 R.P.M. and reach extreme high temperatures, are made of the same "restricted metal."

We know that the Government directed the use of stainless steel for plane parts exposed to high temperatures and to extreme corrosive conditions.

The makers of U·S·S Stainless Steel-who are now meeting the "restricted" demands of the aviation industry-have developed new pro-

duction practice, new equipment, new methods, whose benefits undoubtedly will be reflected in your planes of tomorrow.

U.S.S Stainless Steels are produced on plant equipment devoted exclusively to stainless. The composition of each type of stainless is under exact control at all times. Specialized heat treating equipment assures top-grade stainless steel for any specific application.

All these activities are under the supervision of thoroughly qualified specialists, who direct carefully trained men of long experience. To these people, making U·S·S Stainless Steel is their only business-for they work with stainless exclusively.

When your new designs call for high strength-weight ratio, resistance to heat, abrasion, corrosion, erosion, oxidation and impact shock, be sure you have the latest authoritative data on U-S-S Stainless Steels.

Our specialists will be glad to consult with you regarding all of your present problems and future plans.

AVIATION, December, 1944

U·S·S STAINLESS STEEL


SHEETS - STRIP - PLATES - BARS - BILLETS - PIPE - TUBES - WIRE - SPECIAL SECTIONS

AMERICAN STEEL & WIRE COMPANY, Cleveland, Chicago and New York COLUMBIA STEEL COMPANY, San Francisco

CARNEGIE-ILLINOIS STEEL CORPORATION, Pittsburgh and Chicago NATIONAL TUBE COMPANY, Pittsburgh

United States Steel Supply Company, Chicago, Warehouse Distributors United States Steel Export Company, New York

STATES

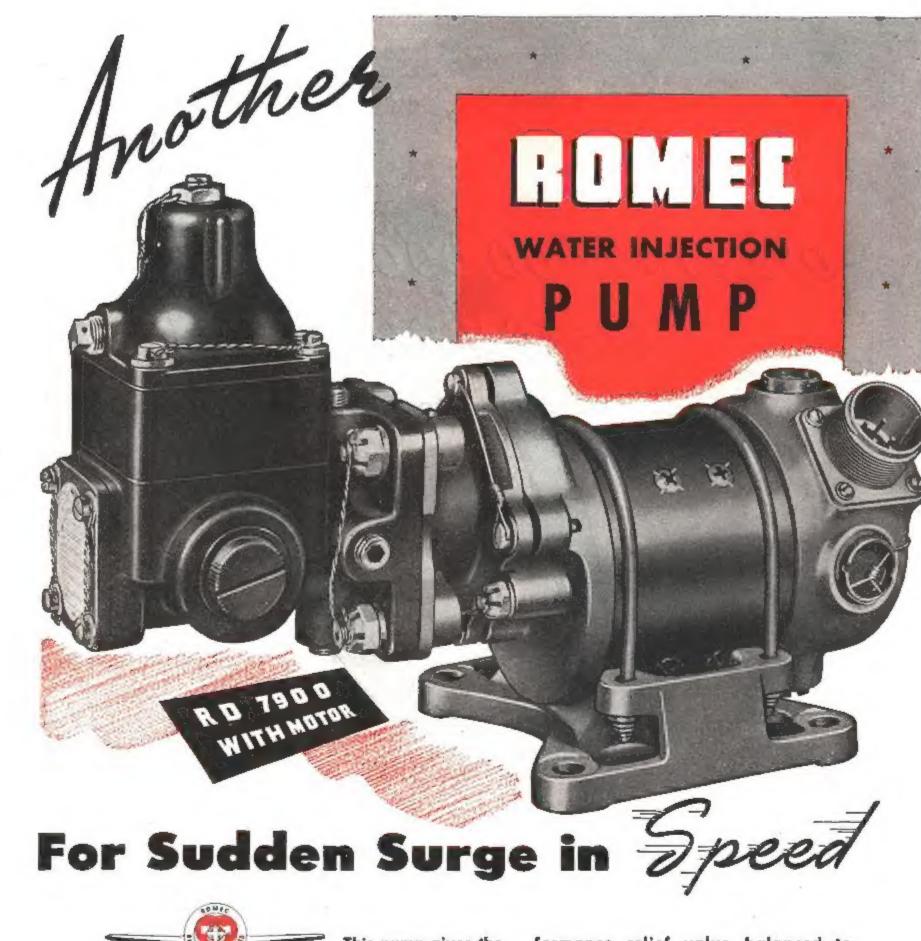





This pump gives the plane extra reserve


power to be used in any emergency. It makes possible a sudden burst of speed for quick get-away or faster dash when needed.

The RD-7900 Water Injection Pump can be used to supply water or water-alcohol mixtures, at pressures of 45 P.S.I. up to 250 G.P.H. The pump meets the mounting dimensions of the 400 G.P.H. Fuel Pump of Army-Navy Specification AN-P-52.

Monel metal rotor and liner. Bearings and blades of Graphitar No. 2. Low temperature diaphragm and seal. High performance relief valve balanced to supercharger pressure. Adapted to installations using the turbo supercharger. Non-corrosive throughout. 24 Volt D.C. explosion-proof Delco motor, light weight with geared head and glass insulated. It's a near miracle in mechanical performance. Write for details.

ROMEC PUMP COMPANY 117 ABBEY ROAD ELYRIA, OHIO



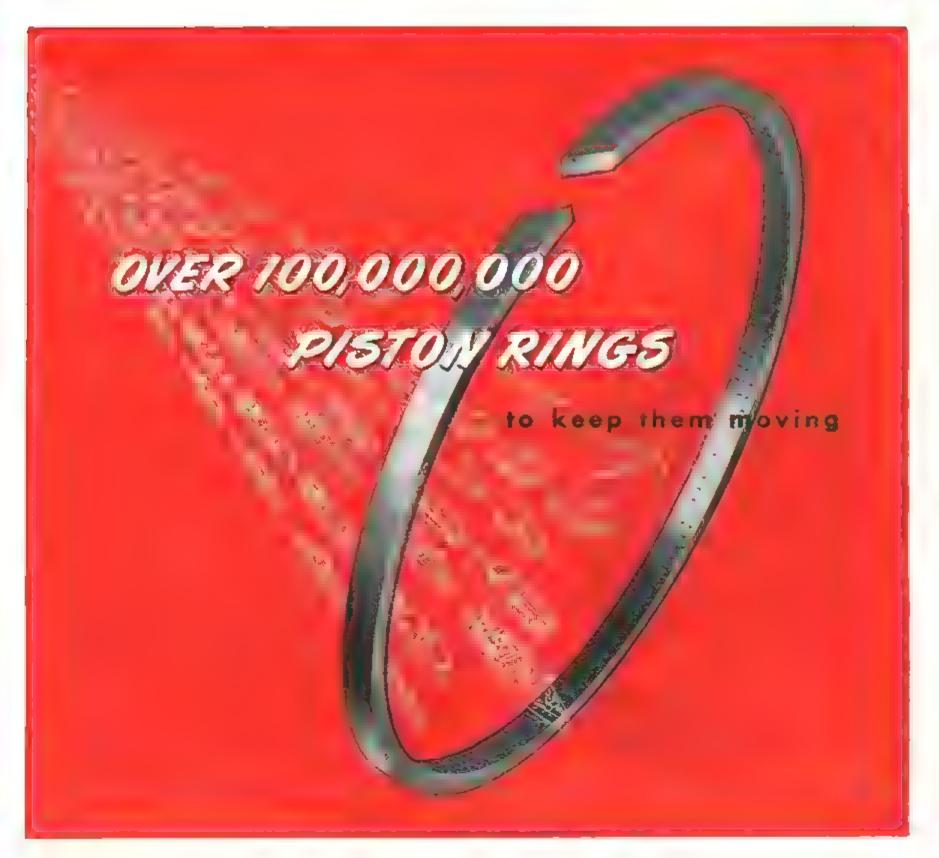

Production figures on mobile equipment for the armed forces make everyone gasp... but multiply them by 100, and you'll have a rough idea of ring requirements. Subs, ships, locomotives, trucks, tanks and planes, all must have rings before they can move. A 4-motored bomber carries almost 1000 rings, with other thousands waiting in reserve.

Over 100,000,000 American Ham-

Over 100,000,000 American Hammered Piston Rings have been produced to meet these needs, in sizes that would fit a baby's finger up to giants you could drive a horse and buggy through. Placed in one pile, these rings would tower over 200 miles into the sky. Edge to edge,

*(VAN DER HORST PROCESS)

they would make a chain that would girdle the earth at the Arctic circle. And in many, tolerances on certain finishes are two millionths of an inch.

Our engineers still found time for new developments that have revolutionized ring standards: the PORUS-KROME* treatment that has doubled and redoubled life in the most punishing service, and alloys that double tensile strength, and so increase engine performance.

Over 30,000 foundry patterns back up American. Hammered's slogan: "Piston Rings of every type—in every size—for every purpose." Koppers Co., Inc., American Hammered Piston Ring Division, Baltimore, Md.





ISU-REV Constant Speed PROPELLERS FOR UNSURPASSED EFFICIENCY

ISO-REV precision constant-speed governing at any RPM selected during flight, irrespective of power input or air speed, affords take-off at 100% of available horsepower plus optimum aerodynamic propeller efficiency and engine economy under all conditions of flight.

Today our entire energies and resources are devoted to the nation's war effort.

We feel fortunate that our contribution toword victory may also place added enjoyment and utility within reach of the plane owner of tomorrow.



CONSTANT SPEED

AIRCRAFT SPECIALTIES DIVISION

ZIMMER-THOMSON CORPORATION

29-05 Review Avenue, Long Island City 1, New York



THE COLLINS RADIO organization has always been driven by the urge to pioneer . . .

To introduce professional standards of design and performance in transmitters and receivers for radio hams in the early thirties.

To engineer a radio outfit that stood up to the rough-and-tumble of Admiral Richard E. Byrd's second expedition to Little America.

To take high quality broadcast equipment out of the laboratory and make it economically practicable for any broadcasting station.

To meet the individual requirements of some of our great airlines with specially engineered communication equipment, including the Collins Autotune.*

To be prepared on December 7, 1941, to go into

production of airborne and ground based radio gear of highly advanced design for the Armed Forces—the result of research and development looking years ahead.

Very soon, we hope, this restless Collins urge to pioneer beyond present horizons will be exerting itself again for the airlines and other commercial and private users of radio communication equipment. Collins Radio Company, Cedar Rapids, Iowa.

*The Collins Autotune is a repositioning mechanism which quick-shifts all transmitter or receiver controls simultaneously and with extreme precision to any one of a number of pre-determined frequencies. U. S. Patenta issued and pending.







Night Prowler

. . . accounts for OSTUCO seamless steel tubing's new dusk-to-dawn air duty

From early air battles has come the experience allied airmen are using to hasten the war's conclusion. Early air warfare has also written the specifications for the planes they fly. As a result of combat experience both men and machines are tougher today.

Materials and methods have necessarily kept pace. That OSTUCO has successfully met each new requirement is demonstrated by the fact that there is no type of plane in the air that does not use OSTUCO seamless steel tubing. Applications include cowl shaft assembly, engine mounts, cowl spares, nose wheel assembly and flight controls.

When reconversion comes this OSTUCO experience and adaptability can be put to your advantage in competitive production. Always available to you are the services of OSTUCO engineers and the sales offices listed below, Call on them to help with your "planning" problems.

CHICAGO 6, JLLINOIS Civic Opera Bidg., 20 N. Wacker Drive CLEVELAND 14, OHIO ... 1328 Citizens' Bidg. DETROIT 2, MICHIGAN . .2857 E. Grand Bivd. HOUSTON, TEXAS. . LOS ANGELES, CALIF. Suite 200-170 So. Beverly Drive Boverly Hills, Collfornia MINNEAPOLIS 2, MINN.402 Thorpe Bldg. .225 Fifth Ave. Bldg. MOLINE, ILLINOIS . MONTREAL, QUEBEC, CANADA .3735-3745 St. James St. .70 East 45th St. NEW YORK CITY 17, N. Y. 123 S. Brood St. PHILADELPHIA 9, PA. SYRACUSE, N. Y .501 Roberts Avenue TORONTO, ONT., CANADA 77-79 Front St. E. 604 Yulsa Laan Bidg. TULSA 3, OKLAHOMA VANCOUVER, B. C., CANADA. . , , 1016 Malpland St.

Powerful new allied weapon Northrop Black Widow P-61 night fighter, Photo courtesy Northrop Aircraft, Inc.



THE OHIO SEAMLESS TUBE COMPANY

Plant and Main Office-SHELBY, OHIO

MANUFACTURERS OF SEAMLESS AND ELECTRIC-WELD STEEL TUBING

24





The whistles will blow, the belis will toll—we'll shower them with ticker tape and tears of joy—then what?

Then the victory they've won and all the things they've fought for will be in our hands to hold... We have all the weapons we could want: Productive capacity, technical skills, buying power, and need. How, then, could we possibly fail?

Only by lack of planning now for total peace.

And in this critical hour of preparedness for peace, the engineers of the basic machine tool producers again have a strategic part to play.

They helped the men of government and of industry to plan the most desperate and gigantic production program of all time... and they can help those same men now to solve our post-war problems of reconversion.

One of these is a Bryant man. We offer his services to you.



25

AVIATION, December, 1944 AVIATION, December, 1944

__needs a Boot!

Banking, rolling, coming out of a dive—at just such moments the unfailing operation of a turret machine gun means everything to the crew of a fighting plane! Ammunition booster motors are relied on for power to offset the force of gravity set up by the plane's evasive action—to make sure the bullets are there when called for.


The ammunition booster motor shown below with its clean design, high efficiency and superlative performance exemplifies Dumore design standards. The vital importance of its function demands unconditional reliability... aircraft space and weight limitations demand the most favorable power-to-pound ratio in a compact design.


The geared Dumore Aeromotor meeting these specifications incorporates in its design an ingenious, compact overrunning clutch, which overcomes the mechanical disadvantage of the gearing to permit hand feeding of the ammunition belt.

After victory, the machine guns served by this motor will probably be retired but the motor itself, and the design features marking it and thirty-odd other current Dumore Motors will be advantageously applied to countless peacetime drive duties.

DUMORE'S AMMUNITION BOOSTER MOTOR AIBIPL

packs a powerful %th h. p. into a 2 pound, 14 ounce drive
unit less than 6 inches long. It includes worst gear
reduction and overrunning clutch and is conditioned
for high altitude operation and protected against
corrosion. This motor is fully described in
the Dumore Aeromotor Catalog. Write for your copy
today! The Dumore Company, Motor Division,
Dept. MM15, Racine, Wisconsin.



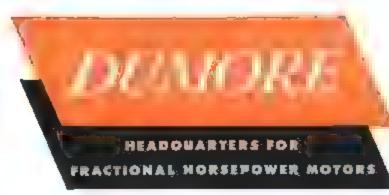



THREE OF MORE THAN THIRTY "FLYING DUMORES"



Vega Ventura cowl flaps, and oitcoaler flaps, are operated by this double-reduction-geared motor, with adjustable illust switches and magnetic brake.



Republic Thunderboll's supercharger intercooler doors are operated by this Dumare Aeromotor, with built-in magnetic brake to prevent overrun and jamming.



When a bullet

Mortin Mariners are equipped with this Dumore flare-release motor, to release parachute flares with precise timing. High starting tarque and fow everrun.





The outstanding performance of Logan Lathes in sustained accuracy and speed results from the exacting care that goes into every detail of construction. In the final inspection, a point-by-point check of the entire machine assures a completed assembly ready for production service. Of equal importance, all individual parts and all sub-assemblies are thoroughly tested as they are manufactured to prevent incorporation in the machine-of any part not

up to standard. The rigorous checking of parts, sub-assemblies, and the final inspection, strictly control the consistent accuracy and quality characteristics of Logan Lathes. Ask your nearby Logan Lathe dealer, or write for latest catalog describing all models of Logan Lathes.



AVIATION, December, 1944 AVIATION, December, 1944



Both were Born at the turn of the Century



In America, the Wright brothers were building the first successful engine-powered airplane which on December 17, 1903, made its historic flight.

In France, Maurice Hondaille was in the midst of experiments which soon led to the world's first rotary, double-acting hydraulic shock absorber—the forerunner of today's Houdaille Aviation Shimmy Damper.

The intervening years have been rich in experience. Houdaille installations—on thousands of aircraft, on millions of motor cars and motor trucks, on heavy military vehicles, on streamline trains—provide an engineering background without parallel in our specialized field.

We invite the aviation industry to draw upon this experience in their planning for the future.

HOUDE ENGINEERING DIVISION OF

HOUDAILLE-HERSHEY CORPORATION

MAKERS OF HYDRAULIC CONTROLS


Buffalo 11, New York

*PRONOUNCED HOO-DYE

AVIATION, December, 1944

The Houdaille* Shimmy Damper controls nose wheel shimmying on America's foremost bombers and fighters,,, and tail wheel travel on huge cargo planes, as well.



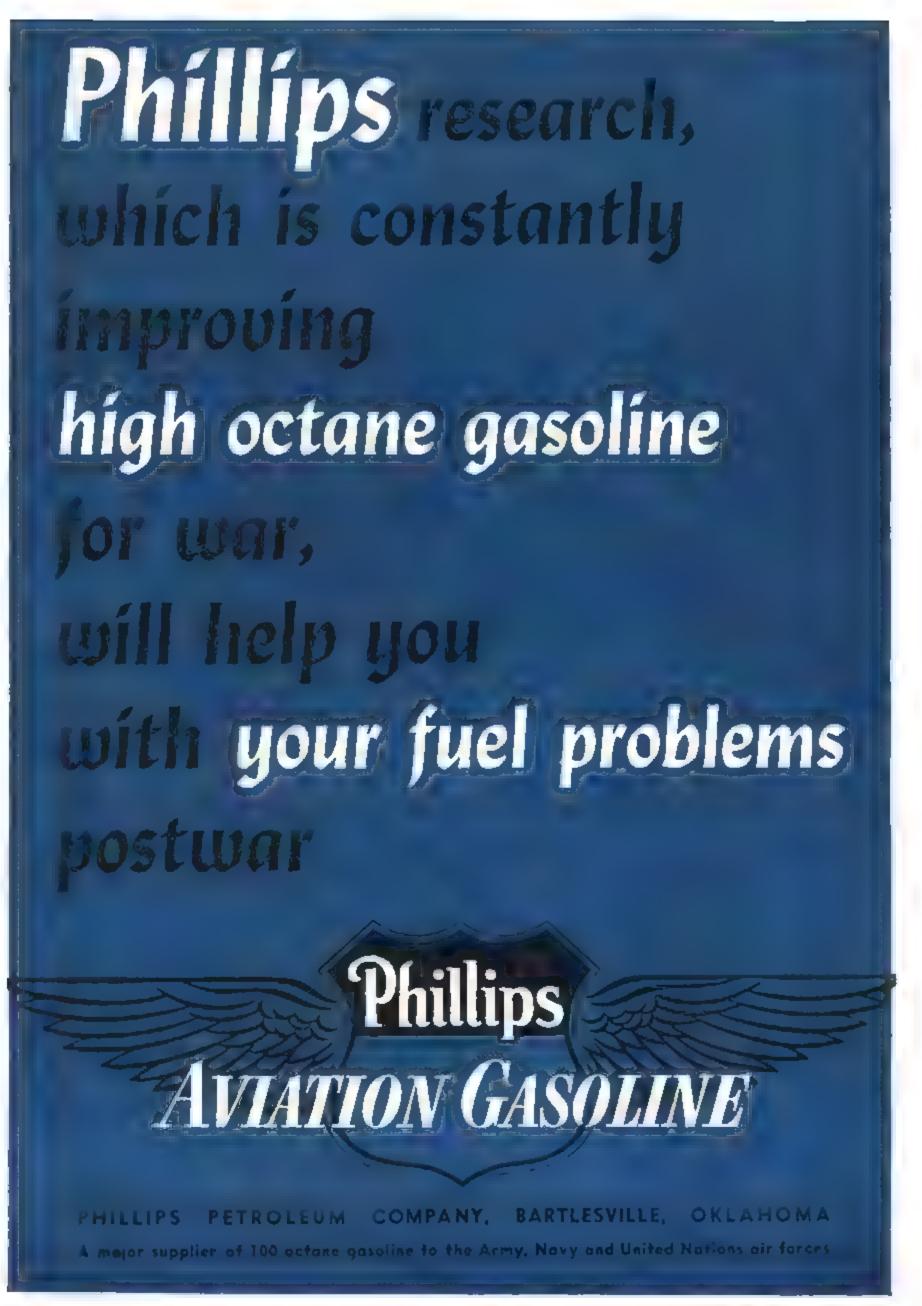



Thanks, Swami, but we know that! We have already heard from thousands of engineers and designers who want to know more about the 7 advantages of Cook "Spring-life" Bellows. Engineers and designers who realize that 'the best equipment needs the best components," but what we want is the names of the men who do not know the full story of "Spring-life" Bellows and how they go beyond the scope of ordinary bellows applications.

We know that "Spring-Irfe" Bellows construction has opened a wider field for post-war bellows applications. We know that after "Spring-life" Bellows have made their final contribution to the winning of the war, they will be incorporated in some of the finest postwar equipment because, despite the largest war-time back-log of orders, our engineers are still managing to cooperate with other manufacturers in the designing of numerous post-war

"SPRING-LIFE" BELLOWS CONSTRUCTION

- 2. UNLIMITED OUTSIDE DIAMETERS AND LENGTH - Cook Spring life" construction places no limits on the outside diameters of the length of believes.
- 3. WIDE RANGE OF SENSITIVITY Flexibility varies directly with the number of flanges and type and thickness of metals used.
- 4. CALIBRATION Cook "Spring-life" Bellows are particularly sustable for applications requiring extreme accuracy and spring-rate, as well as zero hysteresis, "Spring-life" Bellows may be calibrated to function in direct relationship to increments of pressure, and
- 5. UNIFORM MOVEMENT Because Cook Bellows are made of tempered materials, they maintain a uniform movement in operation and assure exact return to the "no load
- 6. LONGER LIFE Extensive life tests have proven that Cook 'Spring-life Bellows can take it' far and beyond any ordinary seamless type of bellows. Tests have shown that 600 million flexures cannot weaken. Spr nglife Bellows of phosphor bronze construc-
- 7. GREATER ADAPTABILITY Because of the above advantages, Cook Be lows open a wider field of bellows applications, involvtog temperature, pressure, dimensional re-sponse, corrosion resistance, sensitivity and

WHAT WE DON'T KNOW are the names of all the engineers and designers who, we feel sure, will be glad to have the complete illustrated story on "Spring-life," showing characteristics, construction, data charts, etc. Because clairvoyancy can't help us with this problem, why don't you send for your copy of this 44-page book today? It may help you solve many unusual engineering problems

Remember one of our field engineers will be pleased to call on you and consult with you on your present or post-war problems. Although supplying our armed forces with all their demands, on time, is still our primary job, our engineering force is efficiently geared to assist you with your future considerations.





2700 SOUTHPORT AVENUE . CHICAGO 14, ILLINOIS

A PROMISE

TO POSTWAR

ENGINE

DESIGNERS

(C)

For almost half a century, Holley research has pioneered many significant carburetor improvements. The postwar period will see this technical leadership further emphasized. ¶ On postwar highways, skyways and waterways, Holley research will provide engine designers the utmost in engine efficiency, performance and economy of operation. ¶ If carburetion is your problem, Holley experience and facilities will be valuable to you.



HOLLEY

AIRCRAFT, AUTOMOTIVE, MARINE

CARBURETORS AND ACCESSORIES





When London to Washington, Non-Stop ...becomes just a Routine Flight

Recently, the War Department announced that a Douglas C-54 Skymaster had made the *first non-stop* flight from London to Washington, D. C. Distance 3800 miles; time 18 hours. Even in these days of globe-girdling air operations—that's news.

But after victory, such flights—connecting the capitals and great cities of all the world, will become merely a matter of routine.

At McDonnell, we have a personal interest in the C-54 Skymaster, for we make anti-drag ring cowls and wing leading edge sections for this great ship. And only recently, we completed more than 11,000 anti-drag ring cowls for another famous plane, the


A-20. And during the past two years' period of this contract, every delivery was made on or before schedule—at costs below contract requirements.

These represent only a few of our contributions to the great job done by America's aviation industry to further the war effort. One day soon, when restrictions can be lifted, we hope to tell you about war planes of our own design and manufacture... of other planes we're developing for peacetime needs.

Until that time, we're grateful that we can contribute to the teamwork which has made American aircraft production an achievement almost beyond belief...far beyond the best the Axis can boast.

M.DONNELL Aircraft Corporation

Manufacturers of PLANES · PARTS · PLASTICS * SAINT LOUIS - MEMPHIS *

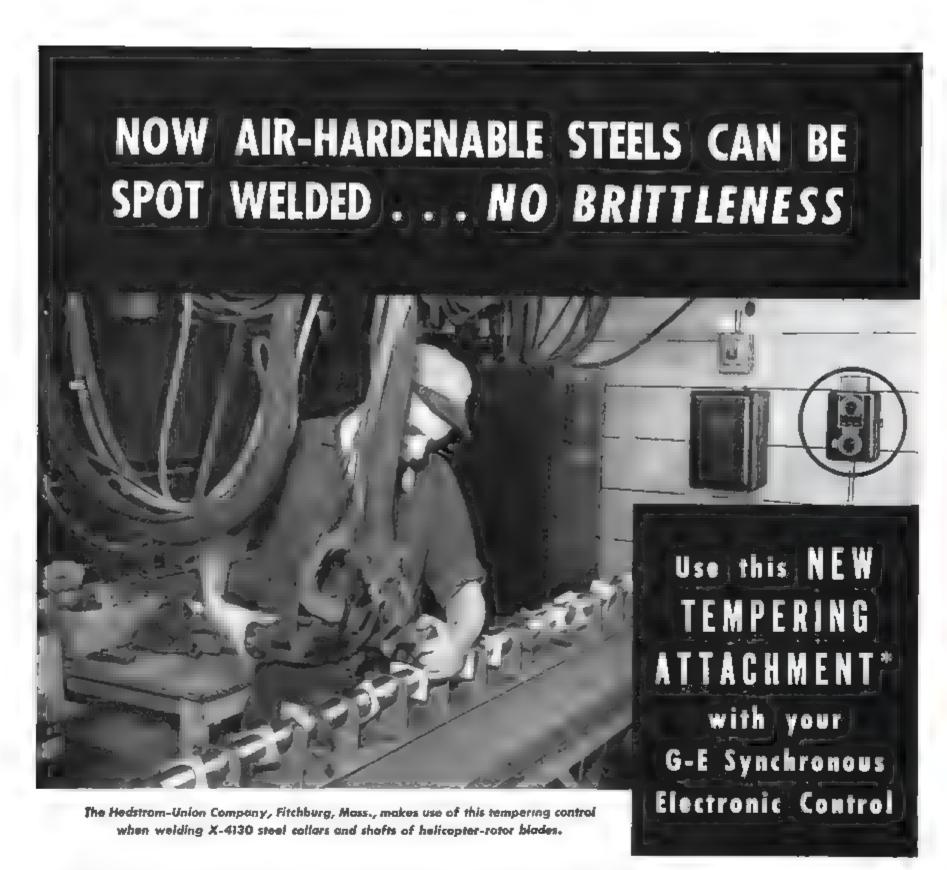

TF medium-carbon steel, low-alloy steel, or highalloy steel is resistance-welded in the normal manner, the chilling effects of the water-cooled electrodes will cause the weld nugget to be brittle and generally unsatisfactory.

This new attachment enables spot welds to be tempered, increasing toughness and ductility, without removing the work from the welding machine.

- 1. Make the weld in the normal manner.
- 2. Chill to several hundred degrees (cool time on pulsation welding).
- 3. Pass welding current of a definite value for a definite time to raise the temperature to tempering level. (This attachment provides the necessary additional adjustment of welding current-time and magnitude—for tempering.)
- 4. Allow the weld to cool in the normal manner.

And 4 Advantages

- 1. Extends the use of your present welding equipment by enabling you to weld air-hardenable steels and temper the welds in the welding machine.
- 2. Enables you to make ductile welds in presentday, air-hardenable steels, thereby reducing rejects due to brittleness.
- 3. Can be used in conjunction with the main welding control to obtain preheat or postheat.
- 4. Easy to install, as few leads to the main control are needed.

More Information Available

Write today for our new bulletin, No. GEA-4201. General Electric Company, Schenectady 5, N. Y.

*For use only with G E pulsation-type, synchronous controls which include heat control by the phase-shift method.

Buy all the BONDS you can- and keep all you buy







Hercules makes no finished

lacquers, but supplies the nitrocellulose from which lacquers

are made. For helpful application information on your finishing prob-

1em, call your lacquer supplier. Cellulose Products Department, Hercules



Transparent clarity of nitrocellulose



BRONZE, SILVER, PEARL

Nitrocellulose lacquers are ideal finishes for all types of metal. Easy to apply, they add brilliant color, full gloss, and beauty

COLORIUL SPARKLE

Packaged goods sell better when their labels stand out with attractive, forceful color. Crystal-clear nitrocallulose lacquers protect such labels from moisture, grease, dust, dirt, fingerprints, and scuffing.



SOFT PASTELS . RICH, VIVID OPAQUES . IRIDESCENTS


No other finish has the same range of beautiful, delicate postels; rich, bright opaques; gleaming, metallic iridescents. Fostest-drying finish known-saves equipment, labor, plant space, maintenance and repair



HERCULES


NITROCELLULOSE



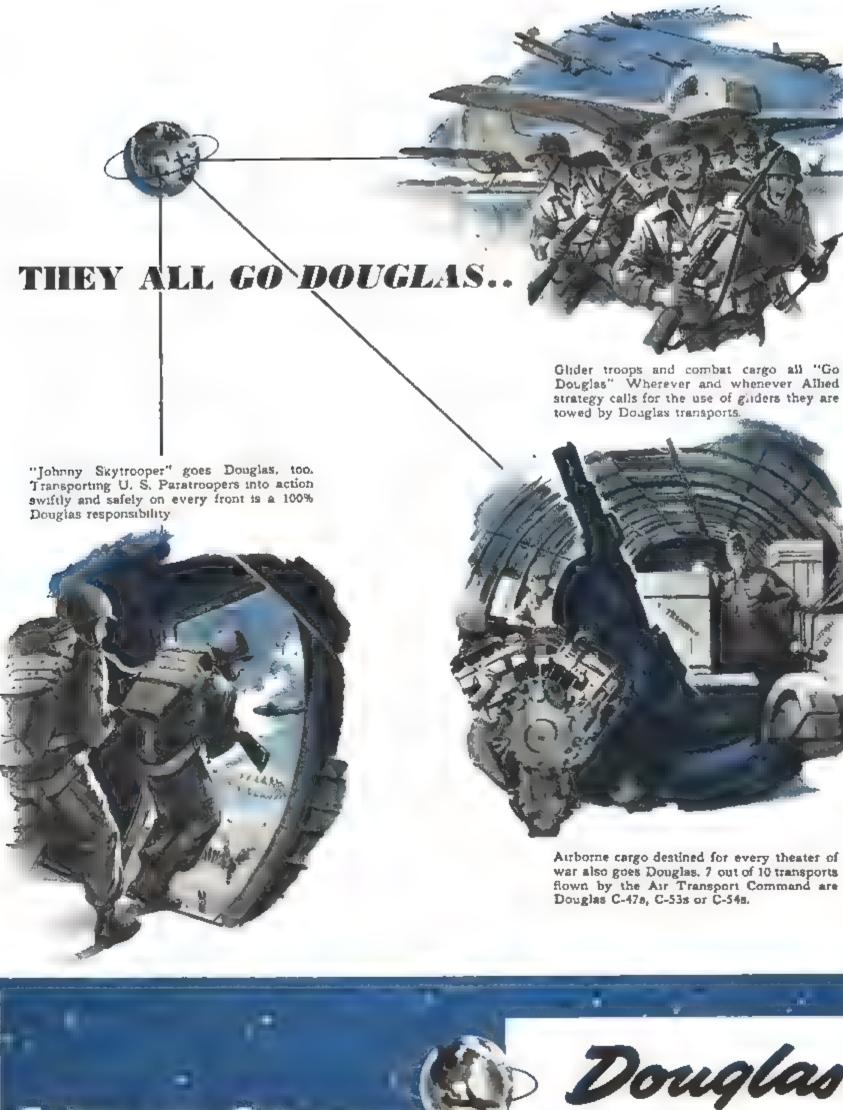



DOUGLAS EQUIPPED AIRCINES. American & ri. nos — Navalian Airlines — Eranist Airways — Chicago & Southern & r. Lines — Colonist Airlines — Belts Air Lines — Castern & r. Lines — Western Air Lines — Horibeast & r. mes — Northwest Airlines — Pan American Airways — Pannsylvania-Central Airlines — TWA — United Air Lines — Çin a Matienal Airways — Pan American-Gesca & rways — Aviance (Aerovias Matienales de Oblomb a) — Cis. Mexicana de Aviance — Panair De Brasis — Cis. Matienal Casterna de Aviance — Panair De Brasis — Cis. Matienal Casterna de Aviance — Aerovias Airways — Crusterna de Sul (Brasis) — Primess & neas Uruguayas de Mavegacian Aeres, B. A. — Aerovias de Aviance — Auritanis — Auritanis — Cis. Matienal — Air — Matienal — Airways — Crusterna de Sul (Brasis) — Primess & neas Uruguayas de Mavegacian Aeres, B. A. — Aerovias de Casterna — Air Matienal — Air — Matienal — Air Matien Arri nes - Australian Hationa: A rives - Everya Dutch Airlines (K. L.M.) - Royal Notherland: Index: Airways (K. N.) L. M.) - Sabena (Setyles Congs) - Swissair (Swissair) - A. M. Anstracipant (Swedon) - Indian Rational Airways - L. A. P. C. (Spain) - Arr Lingus (revised) - American Airlines of Masten - British Oversess Airways (Boac) (Regions).

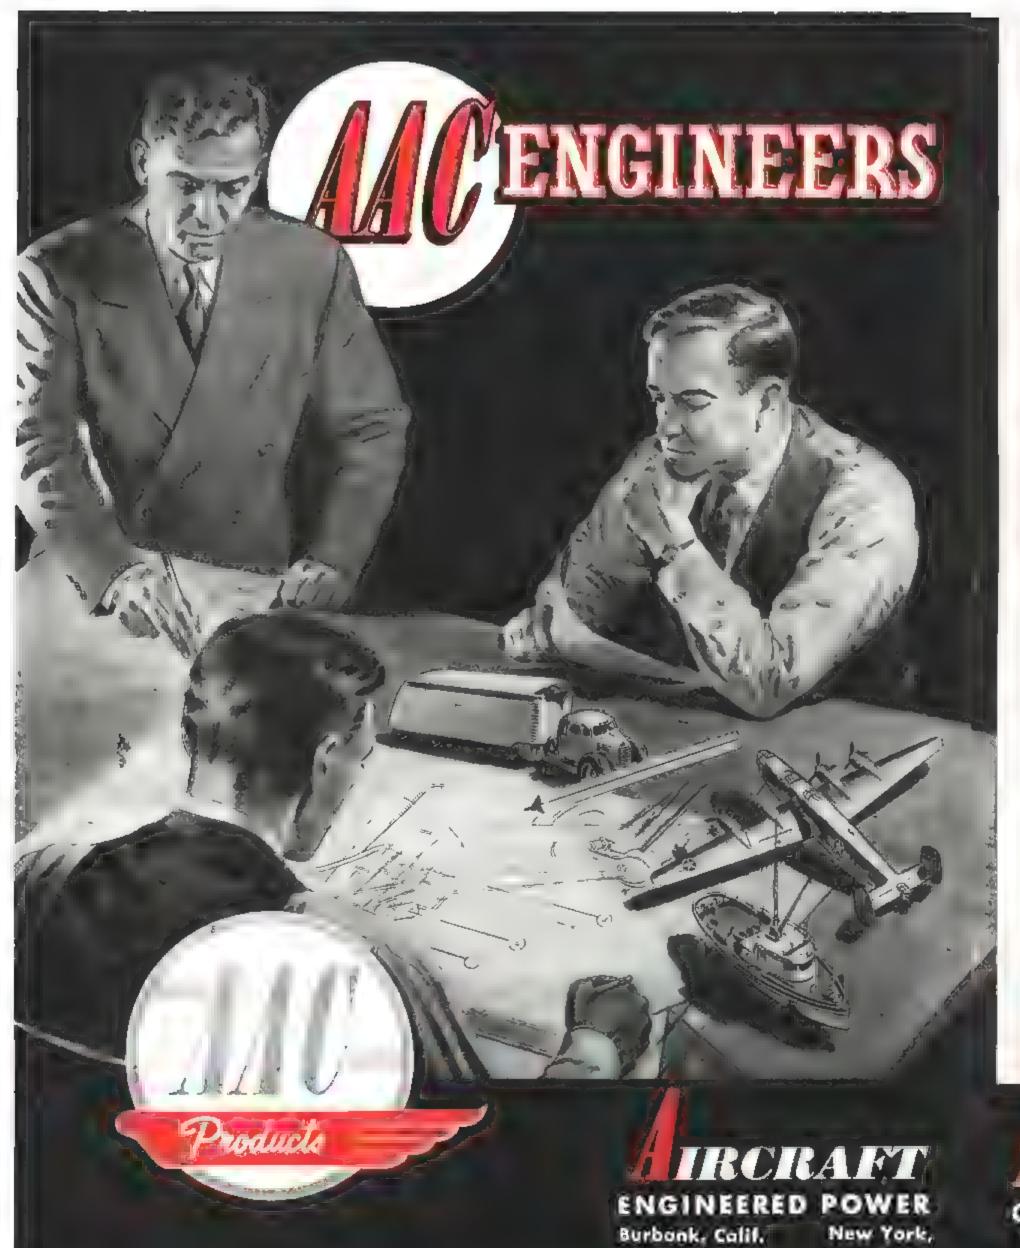

are blazing new trails in POWER CONTROLS

NDER the rigorous, exacting requirements of military aircraft, power controls developed by AAC engineers have proven their superiority. In all the theaters of war, from Alaska to the African deserts, they have set new records in performance and dependability.

With the background of this war-tested "know how", AAC engineers are now blazing new trails in the development of many other types of

engineered power controls-hydraulic, air, vacuum and electric. Tomorrow's trucks, trailers and buses . . . marine craft...Diesel and gas engines ... airplanes . . . industrial machinery and equipment ... will be equipped with these controls, to make operations easier, safer, more efficient and more economical.

AAC engineers are at your service, to help you with your own power controls problems now or after the war. Just ask for an AAC POWER CONTROLS ENGINEER. And write for further information concerning our new air brake equipment and other AAC engineered power controls.



(Abore) Treadle Type Air Brake

(Left) Relay Emergency Air Brake Valve.

{Belou | Fingerup Trailer Brake Control

POWER CONTROLS

BURBANK, CALIF.




CCESSORIES

UORPORATION CONTROLS . PRECISION RADIO and ELECTRONICS

Kansas City, Kans

Cable Address: AACPRO

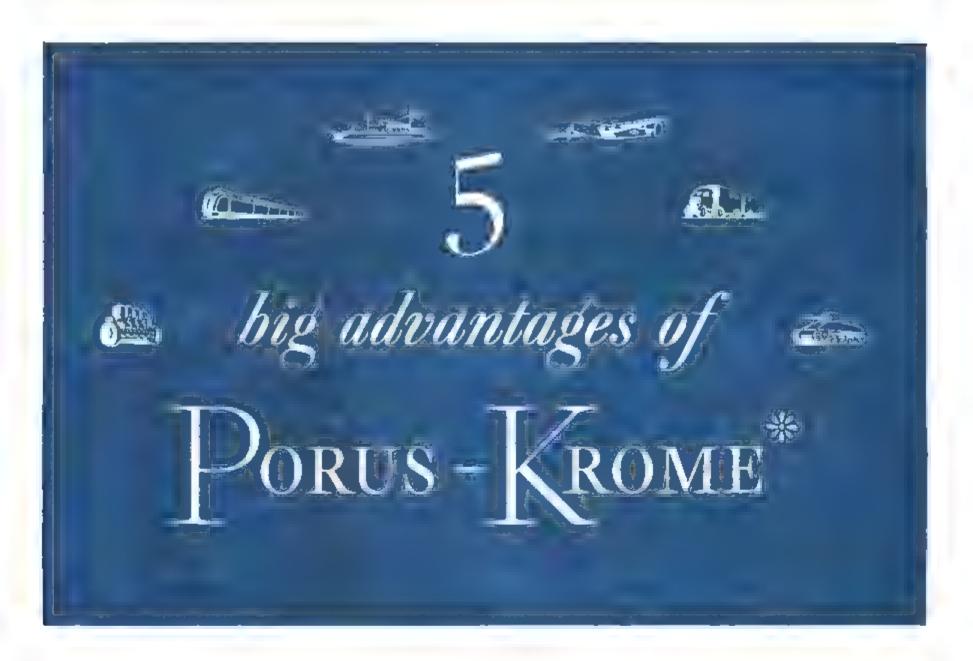

PORUS-KROME applied to the cylinder walls A of gasoline and Diesel engines multiplies the life of the cylinders from 4 to 20 times.

PORUS-KROME on the cylinder walls multi-plies the life of the ordinary piston rings from 3 to 5 times.

7 PORUS-KROME, with its thousands of tiny 3 pores and channels which hold lubricating oil and feed it back as needed, improves lubrication and holds lubricating oil consumption at a constant low level.

4 Porus-Krome and piston rings wear so slowly that high power development is maintained for many more hours . . . many more miles . . . than with ordinary cylinders.

5 PORUS-KROME means greater engine reliability because it reduces scoring and scuffing and the risk of piston seizure and because it cuts down the number of overhauls caused by cylinder and ring wear.

All of these advantages add up to a substantial saving in engine operating costs.




PORUS - KROME

Good for the Life of your Engines

Ponus Krome is pure, hard chromium which is applied 10 eylinder bores by the patented Van der Horst process. It has tiny pores and channels in its surface which serve as reservoirs for lubricating oil, feeding it back as needed. It reduces corresion and wear and multiplies cylinder life 4 to 20 times.

VAN DER HORST CORPORATION OF AMERICA

struments, lights and radio communica-A teletype clicks in code into Patterson Field, Ohio "Rush thirty B-25 main tion must not fail! Information on Autolanding gear struts to China-Burma-India Lite's low-coat dependable aircraft wire and Headquarters Stop Emergency." Four days cable should be in your files. Form No. Clater the landing gear struts have finished 503 describes Steelductor, the high-tension their 14,000 mile Global Express ride! It's wire famous for better economy and peran emergency order but this speed of deformance. Form No. 838 livery is now standard practice on the India describes Auto-Lite's lowrun. Come hell or headwinds-it's four tension, abrasion-resistdays out and four days back! ant aircraft wire and cable. To maintain that schedule, wire and cable Write for your copies of must do its job . . engines, precision in- these Bulletins today. THE ELECTRIC AUTO-LITE COMPANY SARNIA, ONTARIO FORT HURON, MICH. BACK THE ATTACK - BUY MORE THAN BEFORE AVIATION, December, 1944

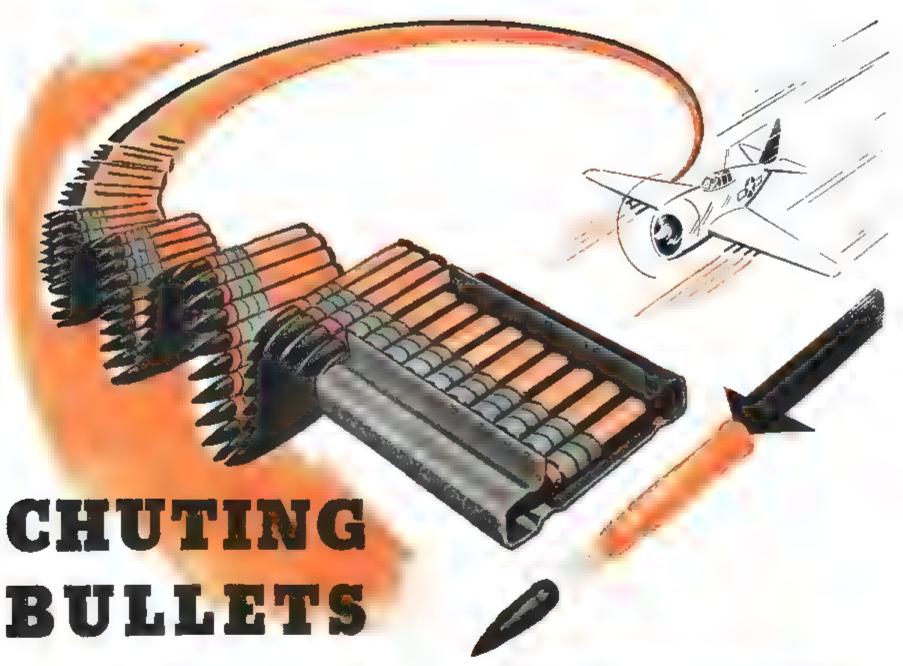

into firing position

with strong, lightweight

PULLEYS of Micarta extend life of both pulley and cable. Millions are now in use in Allied aircraft.

ANTENNA MASTS of Micarta hold the antenna taut without yield or wobble . . . withstand wide extremes of pressure and temperature

BOMB RACKS have Been successfully molded of Micarta . . . furnish an excellent example of Micarta's strength and the skill of Westinghouse engineers in intricate molding assignments





Bullets for a plane's chattering wing-guns are stored in long, looping belts. To guide each bullet accurately into firing position, plane makers are now using chutes formed of MICARTA-"444", the light, strong sheet plastic.

MICARTA weighs approximately one-half as much as aluminum of equal strength-helps eliminate superfluous weight in the plane

MICARTA rates high in flexural, compressive and impact strength. In high altitude flying, as temperatures decrease. Micarta acquires added tensile strength.

MICARTA "444" is easily and quickly produced with inexpensive wooden molds. Sheets are subjected to heat and pressure, and formed into strong, intricate shapes.

This new Micarta "444" was originally developed for the aircraft industry and is now accepted for use as trim tab fairing, accumulator covers, aviator's chart cases, fuselage tailwheel housing, wing-gun ejection chutes. For further information, and a copy of the New Micarta Data book (B-3184-A) write Westinghouse Electric & Manufacturing Company, East Pittsburgh, Pa., Dept. 7-N.

Because They're Small They Have To Be Good

The smaller the grinding wheel, the more critical its quality. Each grain has all the greater responsibility. But small grinding wheels are more difficult to make than larger ones-it requires extra care to control consistency of the abrasives throughout each mounted wheel or point and from one to another. Bay State overcomes the difficulty by special manufacturing procedures which result in a better product, easier to use and with longer life.

Each Blue Flash mounted wheel or point is turned down from a large blank, and is sized and shaped on its own mandrel. Thus, they

need no breaking-in period, because they are dressed as they are shaped.

run absolutely true, because each is concentric to its mendrel.

have no hard and soft spots, because the consistency of grain and bond is uniform throughout. can be used right down to the mandrel, because the manufacturing process automatically provides a positive test for adhesion of abrasive to mandrel.

These advantages of Blue Flash Mounted Wheels and Points are typical of what you can expect from the entire Blue Flash line. Into each type of product, Bay State builds extras that can be easily appreciated when on the job. Write for literature on the products you use-including the handy, pocketsized catalog on mounted wheels and points.

BAY STATE ABRASIVE PRODUCTS CO. WESTBORO, MASS.



BLUE FLASM GRINDING WHEELS and COOL





HONING AND SUPERFINISHING STONES (PORTABLE SNAGGING WHEELS



MOUNTED WHEELS

AVIALON feeember 1944



CUT-OFF WHEELS



INSERTED NUT DISCS (AND CYLINDERS







FOR MANY YEARS the world's leading manufacturer of domestic clothes washers, The Maying Company, Newton, Iowa, is now devoting all of its efforts and facilities to the manufacture of a full line of Hydraulics of exclusive design ... together with Eclipse electrical retracting units . . . and many types of aluminum alloy aircraft castings.

Aerocon Conduit

- FOR ALL SHIELDING APPLICATIONS


High Tension - Aerocon type 154 was first developed by Titeflex engineers to provide the surest and most efficient shielding conduit to blank out radio interference from high-tension aircraft ignition systems. Aerocon or its equivalent is now specified by both Army and Navy Air Forces for the shielding of ignition cables.

Low Tension - In addition to shielding of high-tension systems, Aerocon type 154 is now being used extensively for difficult shielding problems on low-tension systems. Aerocon is used on: electrical wiring from magneto to the ground switch, high voltage power lines

to sensitive electronic devices, as well as lines from the booster coil to the instrument panel.


Aerocon is Standard — Titeflex Aerocon type 154, or its equivalent, is now specified by both the Army and the Navy for high and low-tension shielding . . . wherever electrical connections on airplane or engine must be radio-shielded. Inquiries from aircraft manufacturers will receive the immediate attention of our engineering staff.

TITEFLEX. INC. Newark 5, N. J.









On request, we will gladly furnish samples and full data for your tests.

Waldes Truarc presents a significant advance in retaining rings.

It spreads or contracts without distortion; always retaining its perfectly fitting circular contour.





AVIATION, December, 1944

WALDES KOH · I · NOOR · INC. * LONG ISLAND CITY, N. Y. Canadian Representative: PRENCO PROGRESS & ENGINEERING CORP., LTD.,

"Just Keep Her Headed North, Dear -and Wake Me When Home's In Sight" "know-how" that has given our fighting men the finest planes aloft can quickly thing from non-combat plenes to PT boats.

THERE HE IS, heading home from a weekend spent with his son and his wife ... Or from a dreamed-of vacation spot too far away to visit in two weeks before the war. But, in that plane of tomorrow he'il be taking wings for granted and laughing at long distances.

A man will think nothing of catching a nap in the sky while the wife takes the wheel. For an instrument panel by Stewart-Warner, as simple as the Stewart-Warner panel in the car, will tell her at a glance all that she needs to know.

give us planes that meet the needs of peace equally well. And Stewart-Warner will be ready with the needed instruments . . . embodying the rugged simplicity and dependability that put Stewart-Warner instruments into many million pre-war vehicles, and more recently into every-

With such instruments as their guides, American families will take their post-war wings for granted. This goal of safe, lowcost flight for everyone, toward which the aviation industry has steadily advanced, is just over the horizon in peaceful skies







More output per poun

with this line of 28.5-volt d-c generators for aircraft

Fighters and bombers need lots of electrical powerbut they watch their weight like a beautiful woman.

Yet the design of electrical apparatus for aircraft must consider more than just weight reduction—there are factors of vibration, cooling, and brush wear that must be met.

The five d-c generators shown at right represent the range of Westinghouse units that are meeting this exacting service. Their weight-output ratio is exceptionally favorable.

FOR EXAMPLE:

TYPE	AMPERES	SPEED	WEIGHT
O-4 O-1 P-2 P-1 R-1	100 100 200 200 200 300	4000/8000 rpm 2500/4500 rpm 4000/8000 rpm 2500 4500 rpm 4400/8800 rpm	23 lbs. 33 lbs. 37 lbs. 44 ½ lbs. 48 ½ lbs.

Westinghouse started in the aviation field in 1917, building the first wind-driven, high-frequency alternators for World War I aircraft radios. These 27 years of experience in designing and manufacturing electrical equipment for aircraft constitute a sound reason for making Westinghouse your working partner in aviation progress. Westinghouse Electric & Manufacturing Company, Small Motor Division, P.O. Box 868, Pittsburgh 30, Pa.



for 27 years the electrical partner of the arriation industry

TYPE A-1

TYPE P-1



AVIATION Peremper, 1944



HOW Heli-Coil INSERTS REDUCE HOURS TO MINUTES

In the shops of American Export Airlines, Inc., replacement of burned or worn-out spark plug bushings formerly required removal of the cylinder from the engine. This took several hours—often most of a day. Today, "Heli-Coil" Inserts restore the bushings to perfect condition in less than an hour-without removing the cylinder. They are easily installed—using only simple hand tools in maintenance operations (see photographs below).

"Heli-Coil" inserts are also used in original installations as spark plug and stud bushings, providing a tight wearresistant, leak-proof fitting. They will not corrode in storage or service, and in the case of spark plugs, eliminate

freezing and insulation, permitting removal of spark plug with same tarque as used for installation. For assembly on a production basis, power tools are available.

"Heli-Coil" Inserts are precision-shaped stainless steel helical coil thread-liners. They engage the retapped thread of the spark plug bushing, or any American National tapped thread providing a permanent, hard, smooth surface. They are about one-fifth the weight of solid bushings and occupy less than half as much cross sectional area, permitting more latitude in design and greater strength. Send for further information.

THE SCREW SYSTEM WITH THE ANTI-FRICTION THREAD LINING



U. S. and Foreign Patents Issued and Pending

INSERTING tool is placed over the lapped hole and Insert wound through threaded sleeve into hole.



FEAMING out old thread and tapping new thread for the "Helt-Coil" Insert, in one operation in shops of American Export Airlines, Inc.

EXPANDING tool ready to be screwed into Insert. Mondrel will then be pushed down into sleeve, forcing Insert into walls of tapped hole.



closs up of inserting tool, comprising mandrel and threaded sleave, with insert in sleeve.

STAKING sleeve is placed over expanding mandrel until sleave meets boss. Light blow on top of sleeve knurls chamtered edge ground hote, locking Insert into walks of topped hole.



The CONE AUTOMATIC MACHINE COMPANY sees many GOOD THINGS AHEAD

It is reported that

The soybean is now the third largest cash gram crop in the United

pe ready note to d NE for tomorrow

Alumum can now be chemically bonded to steel so that the two become a completely integrated unit. This process has already contributed greatly to improvement in the horsepower per pound ratio of certain of our aircraft engines.

get ready with CONE for Inmorran

A 200 page book may now be printed on both sides of a 6 x 9 inch sheet and enlarged for reading by the use of a new machine. This would bring the cost of books to about five cents per volume. It is estimated that a full size encyclopedia, printed by this method, would cost about three dollars

get each was CONE for tomorrow

One authority states that oil can be produced from American shale in commercial quantities and at a competitive price.

ge ready with I. O.N.E. for them from

Zem, the new shellac substitute derived from corn, is being used in shoe soles and heels, cements, rain coats, mats, gaskets, and rubber stamps. Packaging films, textile fibers, and bottle caps may be expected later.

get ready with CDNE for topiorton

Most radical of all the new power plants is one in which the fuel is burned in gas mantles and the radiant energy produced is converted into electricity by photo-electric cells.

get ready with GDAE for this rrow

Pure iron can now be deposited on non-metallic substances. By this method a surface of iron may be put on a base of rubber, wood, or plastic.

Aerial photography can show whether the soil of a particular area is gravel, sand, silt, or clay.

get ready with CUNE for commercial

A new lacquer can be baked on to metal surfaces and removed by heating above 212° F

get ready with UTINE by torvoires.

An experimental Diesel engine weighs only eleven ounces per horsepower and can operate on either Diesel oil or gasoline.

get ready with bill NE for to be loss.

A Canadian manufacturer of railroad equipment has designed a flatcar to be used as a landing place for helicopters.

get reads with CUNE for temorrow

The "axonograph" is a device that photographically produces an axonometric drawing directly from a blueprint.

This machine cuts its own weight in metal in four days

Some of the new paper-resin lami-

nates may now be formed as easily as a cook lines a plate with pie crust,

and require pressures as low as 50

ge reads with UHNE to thesers w

Glass fabric impregnated with

synthetic resin is a new material

with extraordinary properties. Ten-

sile strength may be more than

get ready with GONE for tomorrow

Five states have pooled their elec-

trical generating capacity with re-


sults equalling the addition of 135,-

000 horsenower. This practice is

80,000 lbs. per square inch.

expected to spread.

lbs per square inch.



31/2 6-Spindle Conomotic

To produce the part shown, 6 pounds of chips - over a sixth of a ton of metal per hour - were removed from WD1314 bar stock.



AMPHENOL offers you a COMPLETE INSERT REFERENCE CHART



You may have this helpful chart. You can in an instant find the correct insert that fits your particular combination of conductors, voltage and current requirements.

First advantage—this chart organizes for the

eye the most complete line of AN inserts made by any one company-arranged and divided according to number of contacts-readable from top to bottom and left to right. Each insert is illustrated full size on this 38" x 50" chart. A table gives the mechanical spacing of contacts and other valuable information.

All it takes to get this chart is a request on your company's letterhead.

Also included are two ringbook charts. One shows all connector shell types and styles including the special purpose shells-pressure-tight, moisture-seal, explosionproof, light-proof. The other clearly explains the numbering system for connectors.

AMERICAN PHENOLIC CORPORATION Chicago 50, Illinois

IN CANADA . AMPHENOL LIMITED . TORONTO

Connectors (AN, British, U. N. F.) . Fittings . Conduits . Cable Assemblies . U. N. F. Cable . Radio Parts . Plastics for Industry





ELECTROL'S SHUTTLE VALVE

Stripped down to ruggedly engineered essentials... Electrol's Shuttle Valve is absolutely positive in operation—yet so simple in construction that there are no springs and only one moving part. Electrol's Shuttle Valve eliminates need for grinding, honing or seating of valves. Write for complete engineering data.

ELECTROL INCORPORATED, KINGSTON, NEW YORK HYDRAULIC EQUIPMENT FOR AIRCRAFT

AVIATION December 1944

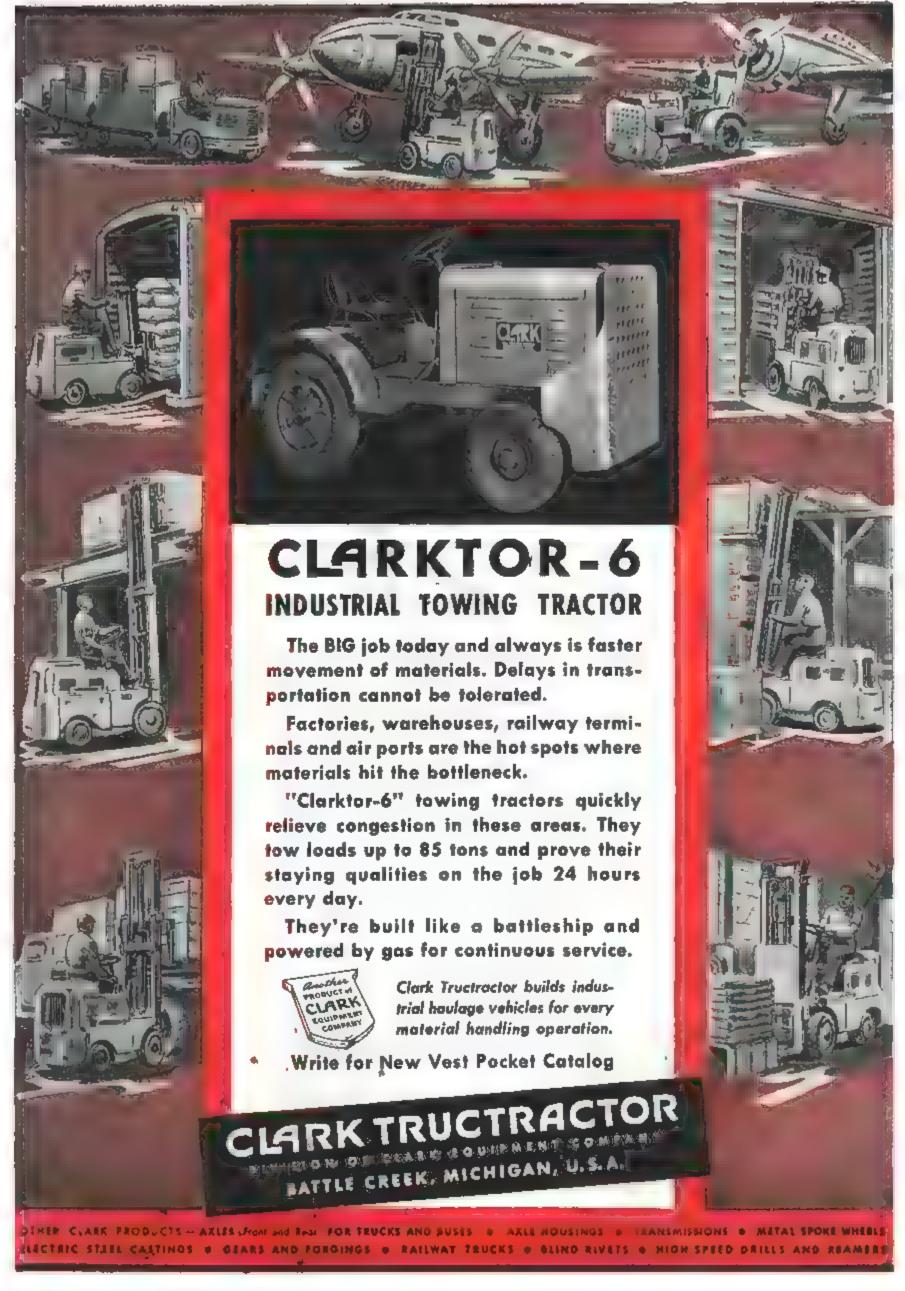

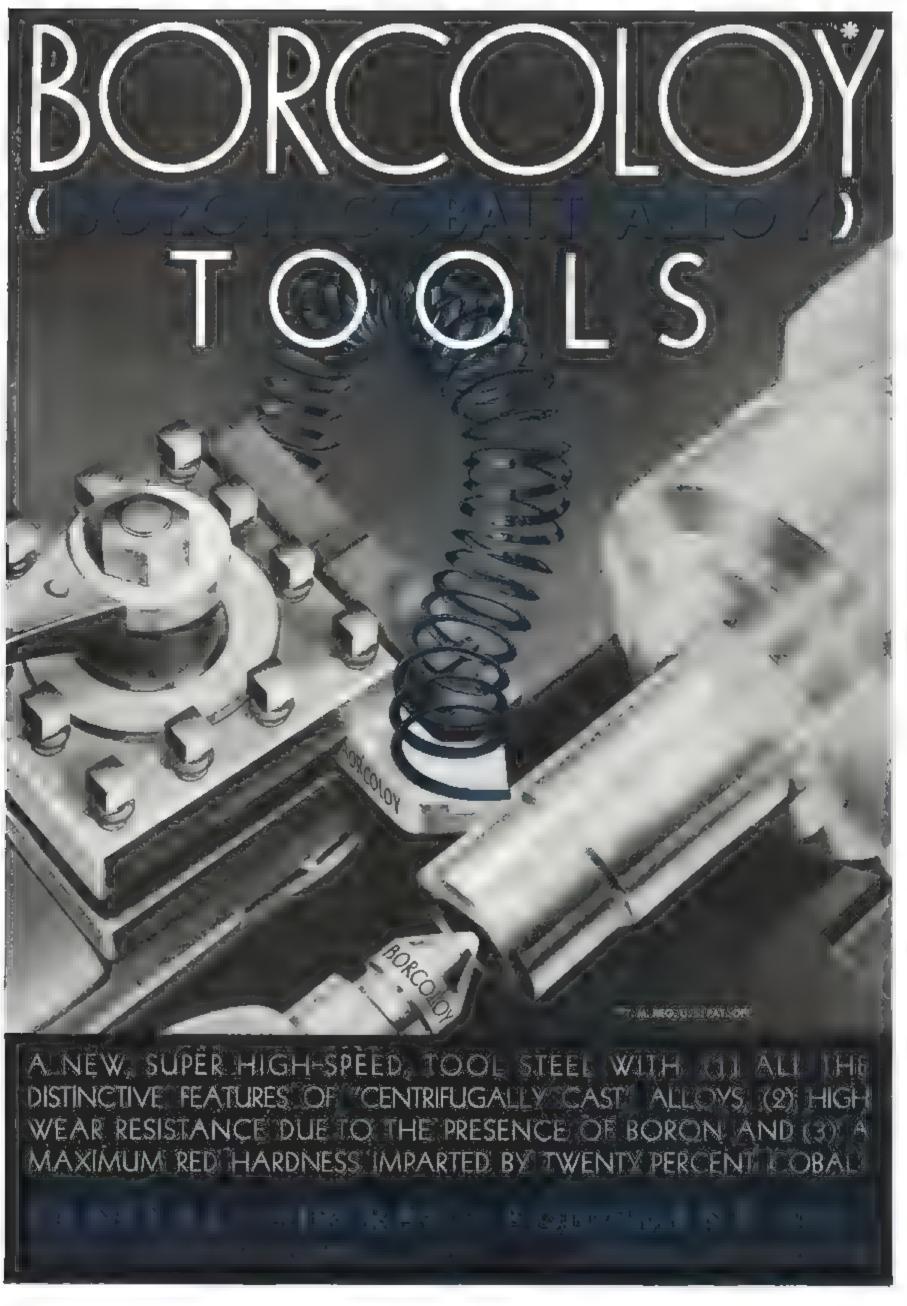



For the modern engineering department, photocopying is the quick, easy, sure way to get reproductions from pencil drawings. typed or written material, printed pages and charts, photographed subjects, etc. And it's proved a godsend for restoring old tracings or making usable, readable prints from drawings and records which have become smudged and weakened

The photo-sensitized paper used for such purposes must, at least, reproduce every detail clearly. Or what is most desirable, it should actually intensify the contrast between the original and the reproduction. And a negative or positive on Hunter Hecco-Dyzed paper will do just that; it's outstanding in contrast, density and sharpness. So, when you issue Hunter prints to your own plant, to men in the field, or to vendors, you eliminate the chance of mistakes, delays and costly communications occasioned by errors in reading.

It's the maximum of silver in the coating and the uniform photo-chemical reaction of Hecco-Dyzed paper that produce consistently good reproductions. This Hunter Quality is the kind that pays off in savings of time and expense in expedit-ing critical work . . . where every diagram, dimension and notation must show clearly.

Ack to be chown! Call the Hunter Electro-Copyist distributor (his name is in the classified 'phone book), or send us one of your originals. We'll return it with a sample of the kind of reproduction work you should be getting . . . and can get dependably . . . if you specify Hunter Hecco-Dyzed Papers.

HUNTER ELECTRO-COPYIST, INC. 480 S. Warren St., Syracuse 2, N. Y.

Variations of cross-

hatching show

Shading of isomet-

Hunter Electro-


COPYIST pioneered

Engineering Depart-

ment Photo-Copying.

Six sizes. Prices from 57.50 to \$3000

clearly.

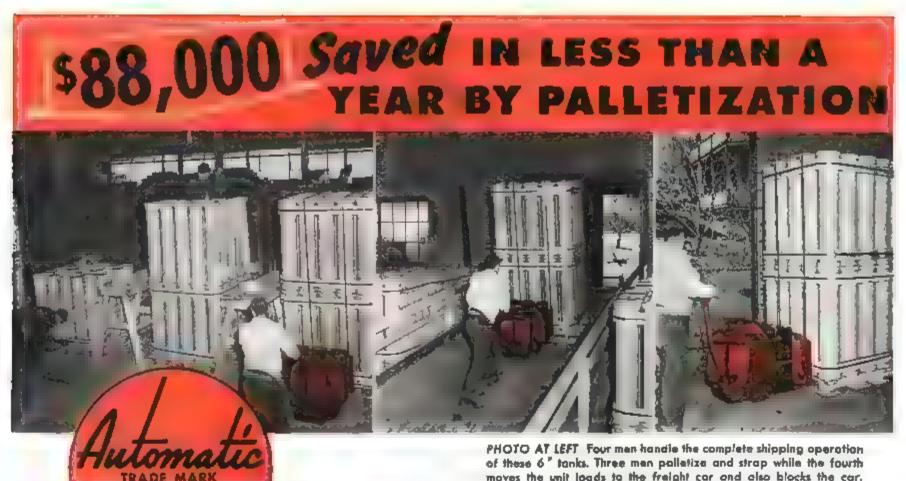

Replaces two-wheel hand trucks in a warehouse to handle cartridge tanks... CONSERVES MANPOWER, MATERIALS and COSTS • • • • •

TRANSPORTER

Saving No. 1-crating of tanks, previously required, was completely eliminated, releasing men for other work.

Saving No. 2—now instead of the full time of ten men and one third the time of six carpenters, four men perform the entire shipping operation. One man operating an "AUTOMATIC" TRANSPORTER now loads and blocks a freight car in 1½ hours as compared with the old time of four hours when four or five men were used.

Saving No. 3—huge reduction in need for critical fireboard and lumber. 2520 board feet of lumber are saved daily through use of pallets.

NO STRAINING—TUGGING—PULLING Nor PUSHING with the "AUTOMATIC" TRANSPORTER

POSITIVE MECHANICAL BRAKE • CONTROLS IN STEERING HANDLE • FORWARD AND REVERSE SPEEDS • FRONT WHEEL POWER DRIVE • SHOCKLESS HYDRAULIC PLATFORM LIFT WITH EASY FOOT CONTROL • "DEAD-MAN" CONTROL

PHOTO AT LEFT four men handle the complete shipping operation of these 6" tanks. Three men polletize and strap while the fourth moves the unit loads to the freight car and also blocks the car. Formerly the full time of 10 men and one third time of 6 carpentars was needed for shipping operations.

CENTER PHOTO A pallet load is taken up the specially built romp from the warehouse floor to the loading dock.

PHOTO AT RIGHT Placing one of the 18 pollets loaded in every freight car. It now takes this man 1 ½ hours to load and block a car, Formerly It took four or five men four hours.

AT THE I	SULTS OF PALLET FLORENCE STOVE CO	CHAPANY
Mes employed in packing operations	BEFORE AND	AFTER
Men employed in loading operations	Shirten	**************************************
Time to load freight car	1)4	11/2
TAX BANGS		11.000
	PANNET SE CHARLES	
63	ND EVERYBODY'S HAD	PY 2
-	AND TO	

PHOTOS AND CHART COURTESY U. S. NAVY

WRITE! A complete case history covering this "AUTOMATIC" TRANSPORTER application will be sent on letterhead request.

MANUFACTURERS FOR OVER THIRTY FIVE YEARS Electric Propelled INDUSTRIAL TRUCKS

AUTOMATIC TRANSPORTATION CO.

69 WEST 8746 STREET

SETHER MALE IN TOWNE HERE

CHICAGO 20, ILLINOIS



"A demonstration will convince you" and "Flyway, USA" will soon again be common phrases in the shop-talk of an air-wiser America. The new plane owner will be bombarded with facts and figures on speed, range, payload, and many other points. And, he will give particular attention to dependability, safety, and economy, all functions of the power plant in the ship.

Kinner dependable power and economy will serve the plane owner well, will back up everything the aircraft salesman says about it. Kinners have been time-tested for 25 years by the private flyer and the armed forces

of this and many another country. Scores of Kinners have logged more than 6000 hours—24 times around the globe at normal cruising speed. Kinners are easily cooled, head temperatures controlled, and oil radiators are unnecessary.

Count on Kinner for dependability, safety and economy in the air world of tomorrow.

KINNER MOTORS, INCORPORATED, GLENDALE 4, CALIFORNIA

BUY EVEN MORE WAR BONDS!



919 - BUILDERS OF DEPENDABLE AIRCRAFT ENGINES FOR A QUARTER CENTURY - 1944



Follow this easy plan

to make sure you get best lighting results





TURN TO G-E LAMP ENGINEERS. They welcome the chance to work with you in developing brand new lighting ideas and applications. To solve special problems quicker, and get the best possible results, use G-E engineering service.

TURN TO GENERAL ELECTRIC

From tiny surgical instrument illuminators to night lights to giant 10,000-watt airport floodlights, General Electric makes lamps for every lighting need. What's your problem? Take it to General Electric - today!

GE MAZDA LAMPS



G-E Offers These Simple Steps To Help You Pick The Right Lamp For The Service

CONSULT YOUR SUPPLIER. Whatever your postwar plans-for new products or new equipment-ask your G-E supplier. His services give you practical help in selecting the right shape, the right type, the right size lamp needed to keep your costs down ... multiply your output and assure top lighting performance.



USE G-E MAZDA LAMPS. Make sure you specify lamps that bear the famous G-E monogram It's your assurance of all the benefits of more than 50 years of G-E leadership in lamp researcha never-ending program that gives you more and more



Hear the General Electric radio programs: "The G-E All-Girl Orchestra", Sunday 10 p. m. EWT, NBC; "The World Today" news, every weekday 6:45 p. m. EWT, CBS.

Are you ready for the new arrival?

* At midnight on December 31st, a visitor will drop out of the skies onto your doorstep. He will wear no uniform, carry no firearms. He is 1945 . . . the little fellow whose predecessors have arrived under varying circumstances, but none with more question marks than this new arrival will have for all of us.

Most of us, during the coming year, must face a dual responsibility. We must plan to continue all efforts needed to bring war quickly and victoriously to an end. At the same time, we must plan effectively for the great future of peacetime aviation. That is a job that the aircraft industry can and will accomplish successfully.

Here at AFCO, fittings for the planes of war must continue to have priority. Nothing can stand in our way of providing the best fittings we know how to make for use in the air armada of Uncle Sam and his allies. Our operations are being organized, however, so that some production in 1945 may be available for production of special fittings for other than war equipment.

This, then, is an invitation to aviation men seeking efficient, co-operative sources for their 1945 and postwar fittings needs. These men will find AFCO helpful and eager to aid . . . ready to make the way easier for the new arrival and his problems.



FITTINGS OF QUALITY FOR PLANES OF WAR AND PEACE The Aircraft Fitting Company + 1400 East 30th Street + Cleveland 14, Ohio



WHITAKER HAS THE "KNOW HOW"

for producing precision made wiring harnesses

You can save a lot of time, and avoid grief, by arranging to have your wiring harness requirements produced by Whitaker . . . Our quarter of a century of specialized experience backs up your judgment when you turn jobs over to us.

You will find our experts capable of turning out wiring jobs in volume, exactly to specifications, and in a minimum of time.

In our modern plants we have ample ca-

pacity and complete facilities for producing custom-built wiring harnesses, bonding jumpers, cable assemblies, and flexible leads.

Regardless of whether your wiring needs are for war production, or are contemplated for post-war products—it will pay you to get in touch with us... In addition to custombuilt engineered wiring assemblies, Whitaker also offers a quality line of standard stock cable products—Catalog on request.

WHITAKER CABLE CORPORATION

General Offices: 1301 Burlington Avenue, Kansas City 16, Missouri Factories: Kansas City, Mo. . St. Joseph, Mo. . Philadelphia . Oakland

Cables, Wiring Harnesses and Assemblies for Automotive, Aircraft, Marine and Radio Equipment

AVIATION, Desember, 1944 AVIATION December 4944



Keep Buying Bonds-The More You Buy, The More They Fly!

Chutes Revolutionize Warfare!

hattlefront of the world, a new page in the history of written by America's paratroopers. We pay tribute to these gallant men! They have profoundly changed military strategy,

Perfect Eagle Parachutes, fabricated by our expert craftsmen, have contributed importantly to the brilliant successes achieved by our Army and Navy. This same perfection and skill necessary for military parachute production today will be utilized in the fabrication of advanced parachute equipment and aviation textile products tomorrow. Eagle's executive and technical staffs . . . and precision sewing facilities . . .

are now available for cooperative development of peacetime

products. Your inquiries are invited for immediate attention. Cagle Parachute Cagle Parachute

LANCASTER, PENNA.

EAGLE WINGS CLUB

Anyone who has made Anyone who has made an emergency escape with an Eagle Parachute is eligible for his time membership in the Eagle Wings Club and will be given the gold Eagle Wings Insignia of this organization Write us if you are qualified.



It's pleasant to dream about

the family helicopter

... and some day soon it may be a reality

DEOPLE who should know claim that it will be years before the helicopter will be safe enough to join the auto in the public parking lot. But no one can tell when someone will bob up with a really foolproof helicopter that can be handled as easily and cost as little as the family car we're driving now.

We're intrigued, too, by other "dream products" that have been heralded as stepping stones to postvictory prosperity. We don't mini-mize their possibilities. But we believe the problems they present are still somewhat in the future.

Our big job now, as we see it, is to meet the needs of the portentous present and the immediate future by supplying superior products for airframe, engine and parts construction that will continue to make American planes the finest that fly,

In the new and continually better products we are developing in our research laboratories and manufacturing plants, the aircraft builder

and designer will find an eminently practical answer to today's pressing requirements. By fine performance these products have truly earned their wings. They deserve serious consideration in your planning for tomorrow, be it ever so revolutionary.

Aircraft Products for the finer planes of Today and Tomorrow

Aircraft quality wire of every type—stitching wire for the faster, cheaper assembly of parts—hinge-pin wire, atrut and tie wire, lock wire, cotter-pin wire-bright finished, tinned or galvanized wire in carbon, alloy and corrosion-resisting steels.

TIGER BRAND Control and Structural Cables that assure perfect functioning of con-

Springs of all types and sizes-extension, compression and torsion springs-plane part springs, springs for precision instruments, new and special springs for the plane's fighting armament.

Cold Rolled Strip Steel to add strength to airframe and accessory construction.

Cold Finished Born of aircraft quality steels, that make possible mass production of high precision parts.

AMERICAN STEEL & WIRE COMPANY

Cleveland, Chicago and New York

Columbia Steel Company, San Prancisco, Pacific Coast Distributors United States Steel Export Company, New York



STATES

"Put it on the Blanchard"

... GET THESE **ADVANTAGES**


Production √ Adaptability √ **Fixture Saving Operation Saving Material Saving** Fine Finish Flatness Close Limits

Grinding Cylinder Barrels

These 71/2" diameter cylinder barrels are held on the chuck of a No. 18 Blanchard Surface Grinder and supported in a fixture.


The material is nitrolog steel and $\frac{1}{16}$ of stock is removed to limits of .25". Twelve cylinders, 24 surfaces, are ground per hour.

This job shows the ability of the Blanchard Grinder to remove, rapidly and economically, large amounts of hard metal.

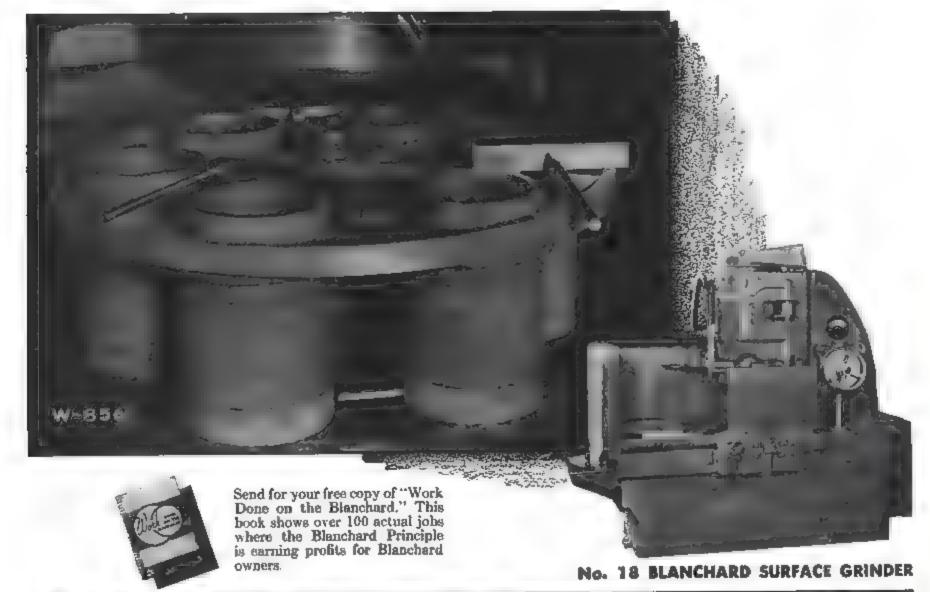








ment makes possible the transmission of controlled hydraulic power wherever you can run a wire. A complete hydraulic system, compact, light in weight, it contains a reservoir, an electrically-driven pump, a pressure relief valve and pressure switch. Delivers pressures up to 3,000 p. s. i. Installed close to the hydraulic cylinder, it eliminates long runs of tubing and many operating parts. PESCO Products Co., 11610 Euclid Avenue, Cleveland 6, Ohio (Division Borg-Warner).

What's new in Hydraulics? Write for this new book, "Pressurized Power and Controlled Flow by PESCO"

In Aircraft Hydraulics, Fuel Pumps, Air Pumps, Related Accessories ...





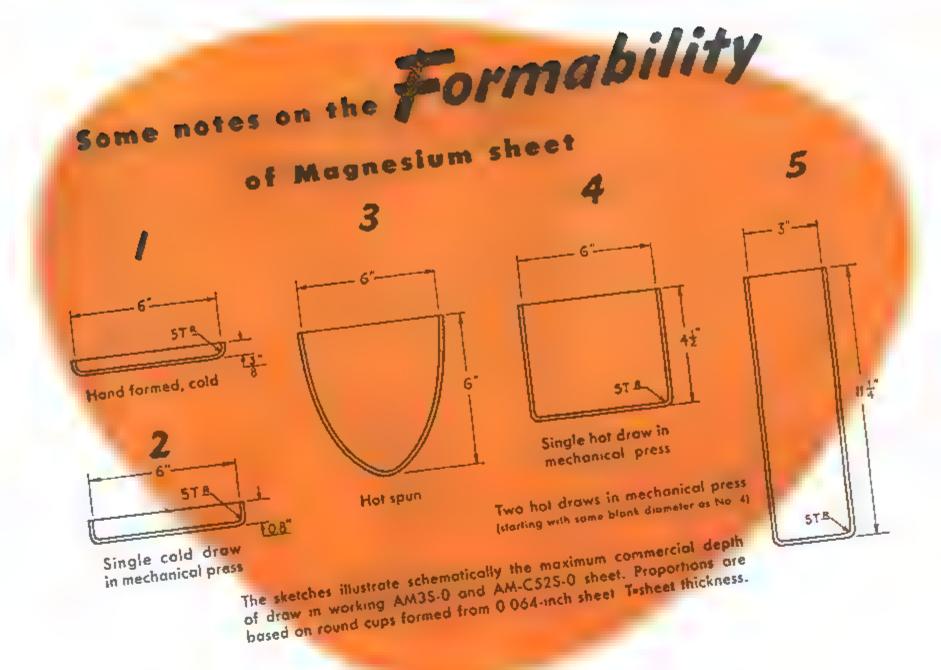

"How deep will it draw?"..."Can it be spun?"..."Must the metal be heated to produce this shape?" Such questions, and many more, are answered in American Magnesium's book, "Designing with Magnesium".

Magnesium has been an extremely active war worker. There is the wealth of knowledge gamed there to guide you, plus American Magnesium's more than twenty years of working with magnesium alloys.

Achieving the ultimate in lightness is a job which magnesium does well. It weighs only one-fourth as much as the heavy metals. It has a high strength-weight ratio. If you are interested in employing this weightsaving ability of magnesium, our engineers will gladly assist you. Write Aluminum Company of America, Sales Agent for American Magnesium Corporation Products, 1713 Gulf Building, Pittsburgh 19, Penna.

MAGNESIUM MAZLO PRODUCTS



AMERICAN MAGNESIUM

CORPORATION

ALUMINUM COMPANY



RECONVERSION RUSTPROOFING

Texaco Rustproofing Products Meet Ordnance Specifications for Application on Government-Owned Production Equipment.

RDNANCE Instructions for processing, packaging, packing and marking of production equipment, as contained in Ordnance Specification P.S. 300-4, are extremely exacting.

To meet these specifications for processing machines, precision tools and other production equipment plant operators must use Government-approved rustproofing materials.

Texaco rustproofing materials meet Gov-

ernment specifications. They are easily applied through the medium of brush, dip or spray, and provide a protective coating that will assure the preservation of this materiel for years. No matter what your rustproofing requirements, get in touch with a Texaco representative through any one of more than 2300 Texaco distributing points in the 48 States, or write to The Texas Company, 135 East 42nd Street, New York 17, N. Y.




AVIATION, December, 1944

Rustproofing Products

TUNE IN THE TEXACO STAR THEATRE WITH JAMES MELTON

METROPOLITAN OPERA BROADCASTS SATURDAY AFTERNOONS

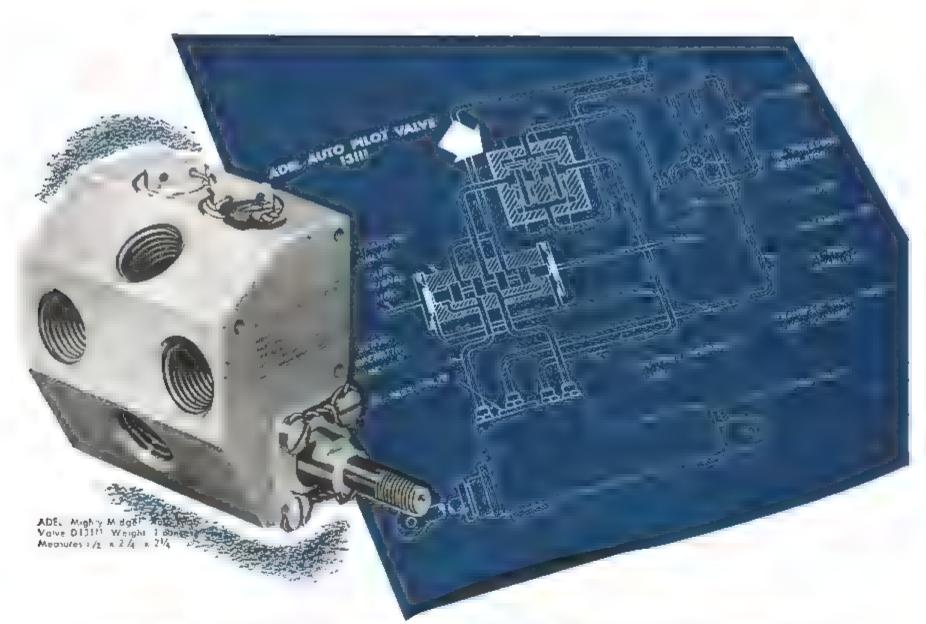

ONE VALVE REPLACES TWO IN S IV GYRO-PILOT

Approval by Sperry Gyroscope Company of the ADEL "Mighty Midget" No. D 13111 for use in this internationally famous company's S IV Gyro-Pilots is unusual proof of quality and DEPENDABILITY. It replaces two plug valves on installations to date with following advantages: (1) Automatic sequence—no need of manual operation of two plug valves in correct sequence. (2) Reduction of

service trouble previously experienced from internal and external leakage. (3) Lower handle loads—15 in. 1bs. max. at normal operating pressures.

Accepted for this installation by Bureau of

Accepted for this installation by Bureau of Aeronautics, the unit is identical, except for camshaft, to ADEL "Mighty Midget" AN 6210 and similar to D 10150 which was granted Winterization Yellow Dot Approval. See ADEL for the answer to your control problems. Over 500,000 hydraulic, "HYdronic (hydraulic-electric) and "ISO draulic units

now in service—Land, Sea and Air thruout the globe. For information, see the nearest office or write today.

"Trade Mar



Engineering Service Offices 1141 Fourth Avenue, Seattle 1, Wash , 421 Mutual Home Building, Dayton 2, Ohio, 802 Fisher Building, Detroit 2, Mich.; 303 Wareham Building, Hagerstown, Md., 914 Lexington Building, Baltimore I, Md.; 353 International Building, Rockefeller Center, New York 20, N. Y.



Sperry Gyrosyn Compass

The Directional Gyro with Magnetic "Sense"



THE Sperry GYROSYN Compass is a directional gyro synchronized with the earth's magnetic field.

It combines the functions of both a Directional Gyro and a Magnetic Compass.. deadbeat indication, accurate magnetic headings... without northerly turning error or resetting

The GYROSYN Compass is an electrically driven directional gyro precisely control ed by a Flux Valve to indicate magnetic heading directly or through Repeaters.

The Flux Valve is a device for detecting the direction of the earth's magnetic field. Its design provides light weight, hermetic sealing, and small size for rig J mounting in the wing tip. It has no rotating parts.

The GYROSYN Compass weighs only 10 pounds including one Repeater. Provision is made for additional repeaters and for furnishing az muth stabilization required by any other equipment.

Sperry Gyroscope Company

SYROSCOPICS . ELECTRONICS . ALTOMATIC COMPUTATION . SERVO-MECHA:

AVIATION, December, 1944

AVIATION, December 1944

7 ±





DROP FORGINGS

up to 2000 pounds


New techniques in producing



heavy drop forgings give more latitude to designers.

Our engineers are available now for consultation on your postwar products.

LADISH DROP FORGE CO.

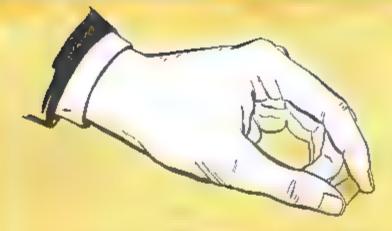

NO BIGGER THAN THE TIP OF YOUR FINGER

Yet This Unique Filter Element
Is an Important Factor
in Diesel Performance

By protecting the fine orifices in Diesel engine injector nozzles from dirt in the fuel, Moraine Porous Metal filter elements safeguard engine performance and reduce maintenance in Diesel equipment of all types. Moraine Porous Metal is particularly qualified for this application by these characteristics: 1) Unique structure, attained by powder metallurgy, which provides tortuous flow passages for more efficient filtration. 2) Adaptability to fabrication in the most efficient shape. 3) Strength and ductility that permit press fits. 4) Adaptability to bonding so that the filter element and sealing gasket are an integral unit.



MORAINE POROUS METAL

(Commonly known as POREX)

Moraine Porous Metal (Porex) is a unique product of powder metallurgy. It is made in four basic grades of fineness, with almost infinite graduations between them, and is available in varied shapes to meet design requirements.

If your product involves the flow of air, liquid or gases—as either an actuating medium, a combustion medium or a lubricating medium—you should find out what Moraine Porous Metal can do to improve your product's performance and extend its operating life. Moraine Porous Metal is performing varied functions for many industries—automotive, aviation, refrigeration, petroleum, pneumatic tool, industrial equipment, tractor, electric motor and others. Consult the Moraine Products Engineering Department for recommendations.

FILTRATION
DIFFUSION
SEPARATION
FLOW CONTROL
BREATHER VENTS
FLAME ARRESTERS

BUY WAR BONDS-SAVE LIVES

MORAINE PRODUCTS DIVISION OF GENERAL MOTORS DAYTON, OHIO

How the "Black Widow" uses

Enclosures of Du Pont "Lucite", methyl methacrylate resin sheets employed on Northrop P-61 Night Fighter!

CRYSTAL-CLEAR transparency without distortion and excellent optical qualities are of utmost importance in the pilot housing and tail gunner compartment of a pursuit ship like the Northrop Black Widow, That's why Du Pont "Lucite" is used for enclosures on this fast-flying, hard-hitting interceptor.

Colorless, transparent "Lucite" airplane sheeting surpasses Government specifications for optical uniformity-

providing clear visibility. In addition it has good shatter resistance, high tensile and flexural strength, is light in weight and is not affected by the elements and by temperature changes.

Representative of other types of planes on which Du Pont "Lucite" has proved its adaptability, efficiency and economy are the Flying Fortress, Liberator, Lightning, Mustang, Mars and B-29 Superfortress.


LAMINATED "LUCITE"-"BUTACITE" SHEETING for pressurized plane enclosures. Free 28-page "progress report" is yours for the asking on your business letterhead. Provides technical information on proof tests, property graphs, and applications. Address: E. I. du Pont de Nemours & Co. (Inc.), Plastics Department, Arlington, N. J., or 5801 S. Broadway, Los Angeles 3, California. In Canada: Canadian Industries, Ltd., Box 10, Montreal.





BETTER THINGS FOR BETTER LIVING


... THROUGH CHEMISTRY

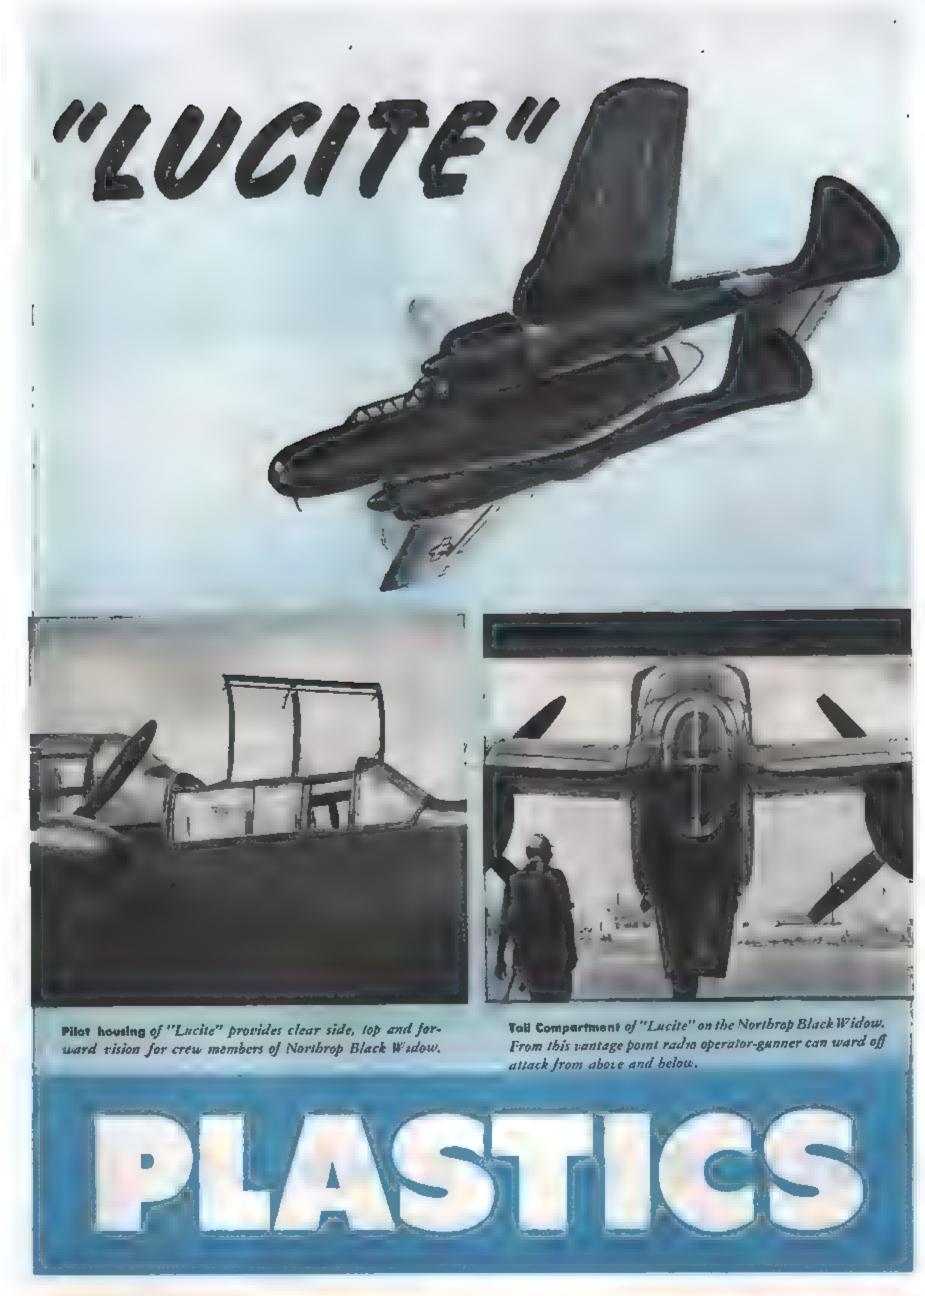

HERE'S THE AMOZING Proof

Viscosity Compensation in Flow Rate Measurement

with the STABL-VIS ROTAMETER

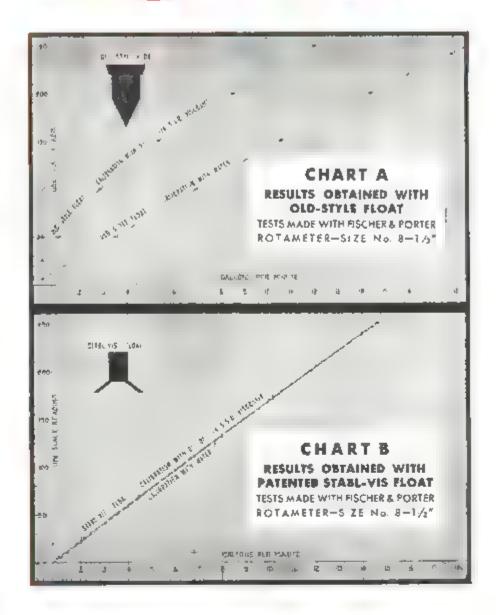

FRIOR to the development of the Stabl-Vis rotameter, accurate flow rate measurement of viscous fluids was impossible except with automatic temperature control or a whole series of painstaking calibrations covering every few points of change in viscosity.

Charts "A" and "B" prove how the Stabl-Vis rotameter has removed these difficulties.

Chart "A" shows calibrations for water, and for oil with a viscosity of 224 S.S.U. using a size 11/4" rotameter with an old style float.

The average error introduced by the change to viscous oil from water is 331/3%, based on the water flow.

Chart "B" gives calibration for water and the same oil of 224 S.S.U. with the Stabl-Vis rotameter. The curves are drawn apart slightly to show there are two curves. Actually, they practically duplicate one another. The change from water at 31 S.S.U. to oil at 224 S.S.U. has been made while maintaining a calibration accuracy of 99.5%.

For you in the Aviation Industry this proof of the metering accuracy of the Stabl Vis rotameter has great significance. It means that flow rates of gasoline, hydraulic oils, lubricating oils, de-icer liquids, coolants and other important fluids may be determined instantaneously with great accuracy.

The Stabl-Vis rotameter can be made for low or high pressure and for direct reading or remote reading. It is adapted to ground test or plane installations as desired. It has become the standard flow rate meter for the aircraft industry.

The theory and design of the Stabl-Vis rotameter is told in our catalog 98-Y. The meters that we build for use in aviation with the Stabl-Vis features incorporated are described in catalog 63-G. Write for these bulletins - we will gladly send them to you without

FISCHER & PORTER CO



312 COUNTY LINE ROAD, HATBORO, PA.

RATE OF FLOW INDICATING, RECORDING OR CONTROLLING ROTAMETERS FOR ANY LIQUID OR GAS

EVEN THE of a POWER DIVE! must not threaten the breakdown of the Formica control pulleys, bushings, and other mechanical parts of a war plane, and it never does, as the successful use of the material in so

large a part of American production, sent all over the world,

Strength is combined with lightness, about half the weight of light metal. It is combined also with very low co-efficient of thermal expansion which enables moving parts to keep their dimensions under the widest variety of conditions-and always

The chemical inertness of the material prevents all corrosion, keeps surface smooth, reduces air friction even after years of use.

The aviation engineer knows Formica well and likes It. After the wor in its decorative grades it will be used to panel passenger cabins, provide argarette-proof, alcohol-proof, spot-proof tops for tables used in the passenger space.

"The Formica Story" is a moving picture in color shawing the qualities of Farmica, how it is made, how it is used. It is availoble for meetings.



THE FORMICA INSULATION COMPANY, 4628 SPRING GROVE AVENUE, CINCINNATI 32, OHIO

Designed — Developed and Built RS-40 DYNAFOCAL SUSPENSION

for Wright R-3350 engines on the



THE type RS-40 Dynafocal Suspension was developed for use with the Wright 18 Cylinder Cyclone Engine. It's design includes the more desirable features of the earlier link type and flexible pedestal type suspensions, and provides an exceptional degree of isolation for all types of vibrational disturbances emanating from the engine and propeller.

Effective snubbing is also provided to prevent engine movement beyond that required for normal operation. Torsionally, excessive movement is restricted by a rubber snubbing ring. Excessive pitch and yaw are prevented by blocking out the action of the larger of the three ball joints beyond a predetermined degree of movement. All snubbing action is cushioned.

Many other components and sub-assemblies, such as instrument panels, power turrets, bomb sights, radio equipment, synchronizing equipment, and other automatic devices, are protected from vibration, both internal and external, with various types and sizes of Lord Shear Type Mountings and other bonded rubber products.



LORD mounting types used to suspend vorious sub-assemblies throughout the B-29 superfortress

If you have a vibration problem send for literature on vibration control or call in a Lord Vibration Engineer for consultation. There is no obligation.

IT TAKES RUBBER IN Shear TO ABSORB VIBRATION


LORD MANUFACTURING COMPANY

ERIE, PENNSYLVANIA



BUY MORE WAR BONDS

Originators of Shear Type Bonded Rubber Mountings

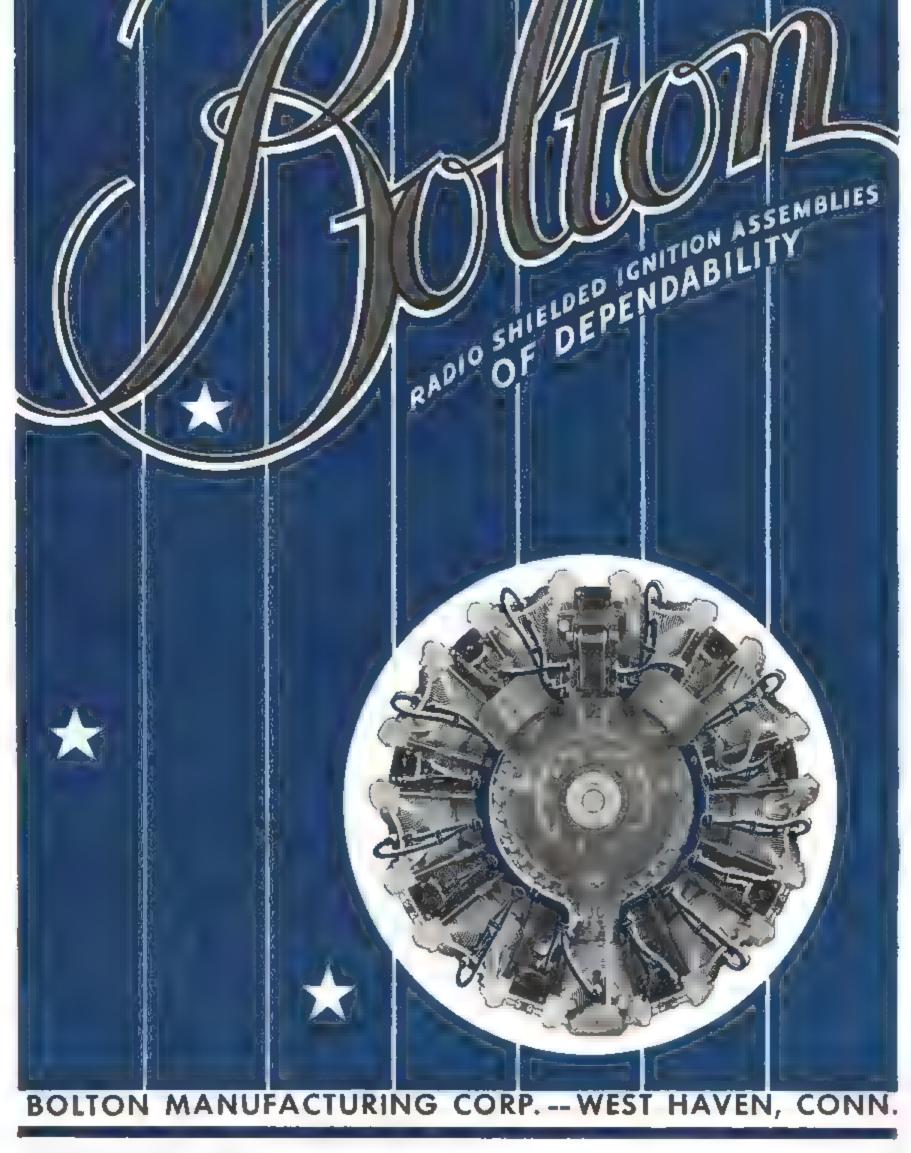



A Part is Never Made Right unless it is Salisfactory to Our Customers



To Lowen landing gears, to open and close shutters, to raise and lower flaps, airplanes need muscles. They must be surefire, smooth and precise in their action.

They must be strong and dependable.

Here you see such muscles. They are Lear Actuators.

These Actuators are powerful, yet operate on a plane's limited electric current. They're tough and strong, yet tip the scales

in ounces or paltry pounds. They can be started and stopped with a simple switch or can be completely automatic.

Devices such as these, tried and proved under the extreme stresses of war, will prove equally important on the great new airplanes which lie ahead in peace.

Lear engineers stand ready to contribute their experience with the use of such controls. Feel free to call upon them whenever a control or actuating problem arises.

PLANTS: Piqua, Ohio, and Grand Rapids, Michigan
BRANCHES: New York, Los Angeles, Chicago, Detroit, Cleveland

en whenever arises.

Formerly Lear Avia, Inc.

AVIATION December, 1944

HEAT TRANSFER

...and some often-overlooked factors that retard it

Frequently, in choosing a material for heat transfer work, too much importance is given to its thermal conductivity.

This is done in the belief that the conductance of the material is the main factor in determining the heat transfer efficiency of the equipment throughout its working life.

The importance of other properties which may contribute more, in the long run, to successful heat transfer is disregarded. The importance of oxidation

resistance . . . and freedom from corrosion products . . . for example, are often overlooked.

In actual service under corrosive conditions and high temperatures, the clean surface provided by rustless, corrosion-resistant materials such as the INCO Nickel Alloys is often more important than the thermal conductivity rating.

CORROSION AND HEAT TRANSFER

Materials that corrode build up jackets of scale.

Such coatings permit relatively little heat to pass through.

The same heat-deadening effect is produced by films that form on metallic walls heated to oxidizing temperatures, and by films of heating or cooling gases that cling to metallic walls roughened by oxidation. Both the corrosive scale deposits and the gas films act as insulators rather than conductors.

This is shown graphically in the accompanying sketch. Note how the films and corrosion scale slow up the heat transfer rate. They make relatively

COMPARISON OF THE CONDUCTANCE
RANGES FOR METAILIC WALLS AND FILMS

Note: Conductance Range
Brushes of Cherrection

Conductance Range
Brushes of Range
Brushes o

unimportant the thermal conductivity rating of the metallic wall.

Similar evidence is given by the table which shows a comparison of the conductance ranges for metallic walls and films.

TABLE OF COMPARATIVE HEAT TRANSFER VALUES


Although the absolute values of film conductances vary with conditions and

very thin and tenacious oxides within their limiting temperature range. There are no thick corrosion scale deposits to slow up heat transfer...little in the way of roughened surfaces to offer a foothold to gas or liquid films.

In addition, the INCO Nickel Alloys have the other properties needed by, aviation construction materials. They are strong and tough... they retain strength and toughness at both high and low temperatures. And the individual alloys have specialized properties that fit them for specialized applications.

USE OF INCONEL IN HEAT TRANSFER

As an example, consider the Inconel boilers that supply steam heat to United Airlines' "Mainliner" cabins,

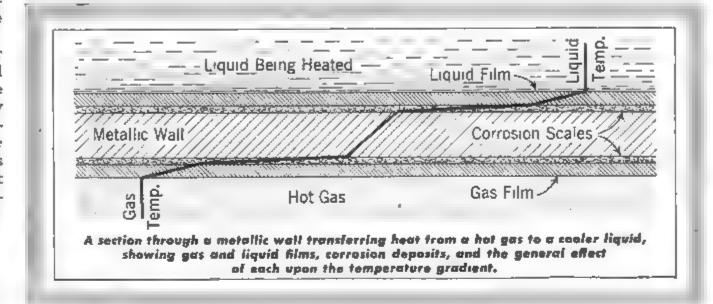

can be determined accurately only by experiment in each application, their relative values are of the magnitude shown in the accompanying table. Conductance ranges for metallic walls one inch and 0 025 inch thick also are given for comparison.

A study of the sketch and the table confirms the statement that, in many heat transfer jobs, the oxidizing characteristics of a material are fully as important as its thermal conductivity and its high-temperature mechanical properties.

CORROSION RESISTANCE OF INCO NICKEL ALLOYS

Nickel and high-nickel alloys offer a wide range of thermal conductivity Monel, Nickel and Inconel develop Installed in the engine exhaust stacks, they are exposed to the blast of corrosive gases at 1500° F. They must also resist the shock of inrushing water at 200° F....a difference of 1300° F. on the inner and outer surfaces of the thin Inconel wall. Yet, despite these destructive factors, and the incessant vibration, Inconel boilers give hundreds of hours of completely satisfactory heat transfer service.

For further information about Heat Transfer, important to designers and builders of aircraft, write today for the INCO technical builtin, "Heat Transfer Through Metailic Walls." Address:

THE INTERNATIONAL NICKEL COMPANY, INC.



Sheet . . Stree . . Rod . . Julyon . Wire . . Costings . . Weiding Rods (Gas and Electric)



"OVER-RUN" HERE

with this New Special Lubricant!

Lubricants

On precision grinders like this, where the ways are lubricated by bleed-off from the hydraulic system, you need a special oil designed for the combination job.

For in the hydraulic system, the oil must resist the formation of gum and other deposits that cause trouble in the valves and pump. And on the ways it must form thin, yet ex-

tremely strong films to reduce frictional resistance, resist rupture and stop "chatter" and "overrun."

HOW TO BOLV

Working closely with machine

CALL IN SOCONY-VACUUM

builders and operators, Socony-Vacuum has developed a special oil that possesses this combination of characteristics. It's Gargoyle Vacuoline Oil 1409.

This new oil already has proved its superiority over other oils in this kind of service and has the approval of leading machine builders. Operators who are using it, report smooth,

swift response to valve controls with increased production of accurately and highly finished parts. Get full details from your Socony-Vacuum representative.

FOR "CORRECT LUBRICATION"

PASSENGER-CARGO LOADS

ARE GETTING BIGGER-

Offic a Navy Photo




giant 70-ton MARS forecasts even bigger sea-based passenger-cargo planes after Victory.





Largest and fastest land-based commercial transport plane, the 60-passenger CONSTEL-LATION gives a real indication of what America may expect in tomorrow's luxury liners.


AND SO IS

FLYNG









HORSEPOWER



For aircraft designers, builders and operators this greatest catalytic cracking program in the world promises even greater "Flying Horsepower" for tomorrow's super planes and cargo craft.

SOCONY-VACUUM OIL COMPANY, INC.
26 Broadway, New York 4, N.Y., and Affiliates: Magnolia Petroleum Co., General Petroleum Corp. of Calif.



NEW SUPER AVIATION OIL HELPS KEEP ENGINES CLEAN!

Drawing upon 78 years' lubrication experience, Socony-Vacuum has developed a new super Mobiloil Aero for aircraft use, to serve as a running-mate for new Mobilgas Aero. In operational flights covering thousands of air-hours, this new oil has proved its exceptional wear-resisting qualities. Outstanding feature is resistance to ring-clinging deposits.




Get the facts on Mobilgas

Mobiloil Aero

MOBIL AERO HYDROL

Proved on Toughest Flights

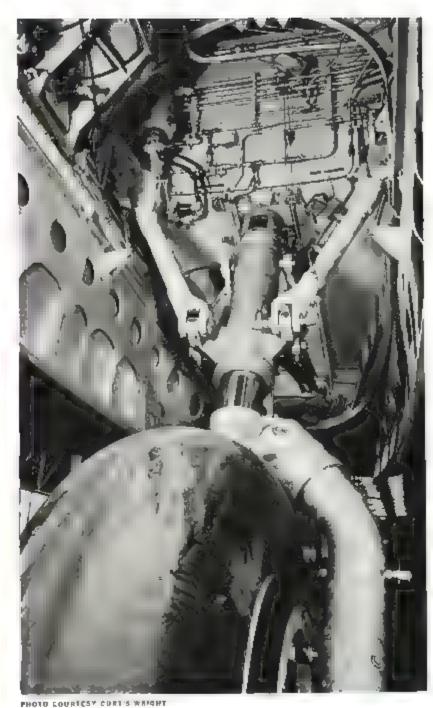

SOCONY-VACUUM'S special aircraft hydraulic fluids—Mobil Aero Hydrol -are proving their exceptional value under all kinds of flight conditionsfrom Equatorial heat to Arctic cold. Carefully refined to resist the formation of clogging deposits, they're in use now in systems controlling landing gear (like that shown left, brakes, surface controls, automatic pilots and loading winches. The fluids are designed to meet all temperature ranges. Mobil Aero Hydrol HFA is recommended for use when temperatures vary widely. Mobil Aero HF is for temperatures down to -50° F. Mobil Aero Hydrol HFW remains fluid at -70° F. Get full performance facts and figures from your Socony-Vacuum representative.

SOCONY-VACUUM OFFERS A COMPLETE LINE OF:

Aircraft Greases

Specially designed greases for high temperatures, low temperatures, and extreme pressure conditions.

Aircraft Special Products

Special products for instruments, lowtemperature oils, hydraulic oils, general lubricating oils.

SOCONY-VACUUM OIL CO., INC.

and Affiliates, Magnalia Petroleum Compony, General Petroleum Corporation of California


AVIATION DIVISION

26 Broadway New York 4, N. Y.



Socony-Vacuum is backed by 78 years of Lubrication Experience!

ANOTHER MASS-PRECISION ASSEMBLY BUILT BY NICHOLS

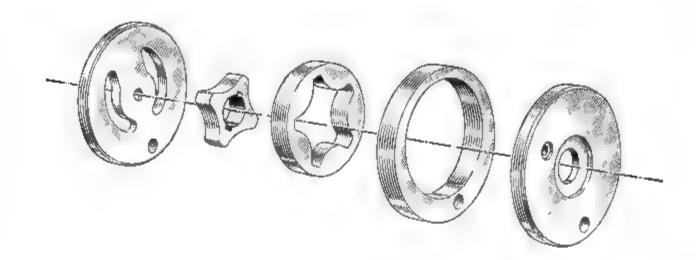

Power House in a Rockage

Nass-Trecision Rackage

Operating at 4,000 R.P.M. and delivering oil at 1,200 P.S I, may sound like a "tall order" for this small assembly of parts. Yet these requirements beaded the list when a leading aircraft equipment manufacturer asked Nichols to produce an interchangeable precision unit which would power hydraulically the feathering action of a propeller in every extreme of temperature.

Feathering a propeller calls for "flick-of-the-switch" response from this mechanism to deliver full pressure *instantly* to stop "windmilling."

Trouble-free performance such as this depends on extremely fine finish and critical dimensions in every part.

Here's how Nichols is producing this "precision package": Flatness and parallelism of the two sides are held to .00015" over a two-inch span...thickness of the gerotors to ±.0001"...special lapping provides high surface finishes even on the rolled bronze part where normal lapping methods would charge the surface. All parts are assembled without pre-selection—which means low-cost production—and are enclosed in a housing.

The solution to one of your product problems may be found in introducing into your design the same basic idea that proved so successful here: localizing the difficult-to-make precision unit in a self-contained, removable assembly which does not depend on the housing for clearances and close fits. Then let "Accurate" Nichols build it.

W. H. NICHOLS & SONS, 48 WOERD AVENUE, WALTHAM 54, MASS.

"Accurate" Nichols



PRECISION ENGINEERING AND MANUFACTURING FACILITIES FOR MASS PRODUCTION

The 5-Week Miracle

THAT

SPEEDS AID TO CHINA

CAN ENGINEERING SPEED LIKE THIS HELP YOU?

CTRANGE contrast to China's teeming millions and primitive hills, the Superforts are speeding vital aid for a gallant ally. To a patient, long-sufferstop; the Jack & Heintz unit delivered 20,000. In two weeks more, production models were delivered for installation. Today, thousands of these Jack & Heintz motors are in service. This is only one of the 20 Jack & Heintz products used on the B-29.



This is the seventeenth of a series of statements by aviation's leaders on THE SHAPE OF FLYING TO COME.



"There can be Aviation Jobs for All"

says ALFRED MARCHEV, President, Republic Aviation Corporation.

'I CLAIM THAT THERE CAN BE JOBS FOR ALL who want to stay in aviation after the war—if, as I believe, conditions at Republic Aviation are typical of the field in general.

"For. (1) The aircraft industry sub-contracts about half of its output to suppliers in other industries which will be returning to normal production . . . so the plane industry's own innate capacity is not 100,000 planes a year but closer to 50.000. (2) If ork can be cut from 58 hours to 40 . . . a further reduction of at least 30% in output. (3) About

25% of Republic's employees will voluntarily return to other occupations after the war.

"For these reasons, we hope that Republic will be able to maintain full employment with only 20% of its present annual sales volume.

"But, employment figures will not work for us unless we work for them. If we put into merchandising all the brains and energy we have put into war production, no aircraft plant, or anybody who wants to work in one, need be idle."

As Mr. Marchev says, great opportunities for fall employment in avertion he ahead if aviation merchandises its postmar plans. And perhaps the first place to merchandise these plans is to the "test pilot" market of T. S. citizens who are always ready to have progress whenever they seem basing soring react playing

This is the market aviation thinks of when it thinks of the more than a million TIME-reading families—who are Inverted's best prospects for planes and air travel—whose positions in American business make them the natural variant variant for any programs aristron may set up—who cote TIME their favorite magazine 7 to 1 over the runner-up

Bolley for that the cleas of ay after subsides are always of interest to the ayiatron moustry.

TIML here gaves them wider circulation

AVIATION'S
SILENT
PARTNERS
TIME

Powered by the Wright Cyclone I8 Engine the Boeing B-29 Superfortress carries the greatest load faster farther higher than any other airplane in existence NEW STANDARDS for BEARINGS There are 49 Bunting Cast Bronze Bearings in the 1200 h p. Wright Aeronautical Corporation Cyclone 18 Engine. With new equipment, exacting new operations and further metallurgical refinements Bunting is producing, in volume, bearings with physical characteristics, accuracy and finish heretofore attainable only in the laboratory. Such bearings and production processes, developed to serve aircraft and aircraft engine manufacturers, are equally available to all manufacturers requiring aircraft precision and finish. The Bunting Brass & Bronze Company, Toledo 9, Ohio. Warehouses in principal cities. BRONZE BUSHINGS & BEARINGS & PRECISION BRONZE BARS

His Peacetime Ship will also be Finished with Berry Brothers' materials

Berry Brothers' service to the aviation industry will shift rapidly after the war, from the camouflaging of allied fighters and bombers, to the peacetime painting of countless commercial airliners and private planes.

Berry Brothers' peacetime aviation paint service will be the most complete in the industry. Wartime leadership in the development and production of aviation finishes will be further expanded through broad distribution of production and maintenance finishing materials to aircraft manufacturers, commercial airlines, fixed base operators and individual plane owners.

Carefully formulated materials, perfected over a period of more than 30 years, will be available for every aviation production and maintenance need. Sales and service facilities will be established to provide convement distribution.



BERRYLOID






Leading Producers of Aviation Finishing Materials in War and Peace, for over 30 Years

BOSTON . JERSEY CITY . CINCINNATI . CHICAGO . ST. LOUIS . INGLEWOOD, CALIF. . MONTREAL . WINNIPEG . TORONTO

-New 178 page Catalog

FOR AIRCRAFT PRODUCTION AND MAINTENANCE

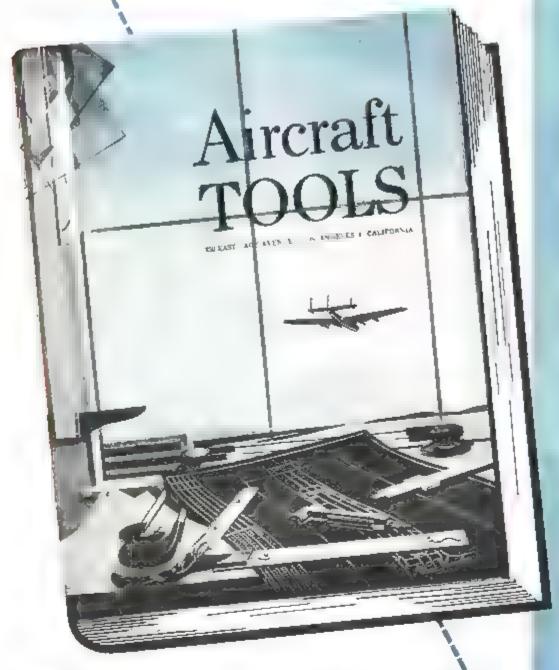

- Sections on riveting tools, dimpling tools, angle drills, cutting tools, bucking bars.
- Section on strap duplicators, rivet squeezers, and other precisionmade products.
- 9-page appendix containing engineering data.
- Handy price and ordering information.
- Clearly written and indexed.
- Full construction de-
- Product photographs.
- Blueprint drawings.

The Most Complete Catalog of its Kind ever Compiled!

If you are engaged in production, repair or maintenance work in the aircraft industry, make sure your plant has the benefit of all that's new in aircraft tools. Just pin the coupon to your company letterhead and mail today for your free copy!

Aircraft Tools Sales and Service are available from the factory and from conveniently located branch offices in Dallas, Detroit and Philadelphia,



SEND FOR YOUR COPY TODAY

Jeare seug we a	copy of your new catalog.
lame	
Сотропу	
osition	
Address.	
ity	State



From now on, it's going to be easier than ever to pick the right wheel for the job-all grinding wheels by "CARBORUNDUM" will carry this new wheel blotter . . . makes identification quicker and easier. A glance tells you why.

- faster to use. All the information you need is on one side of the blotter (see large picture opposite page). And to make it even easier to pick the correct grading, it lists both the old wheel markings and the new markings.
- 2 "CARBORUNDUM", clear across the shop' It's further identified by the display side of the blotter. (See small picture opposite.) Even when the wheel is mounted on the machine, and the blotter is covered, the little black mark on the blotter margin identifies it as a product by "CARBORUNDUM".
- 3 Easter to read. The new blotter resists scuffing, and the heavily inked surface remains more legible, even when soiled with grime and grease.

Wheels with the new blotters will be shipped shortly. If you should receive a wheel with the old blotter, it just means that particular wheel was stocked before the new blotters were ready.



"CARBORUNDUM" and "ALOXITE" are registered trade works of and indicate manufacture by The Carborundum Company)





Milwaukee Milling Machines are power-engineered-PoweRated-designed and built for precision performance with balanced power-every machine has a definite power-rating with ample reserve for all overloads normally encountered within its field of job applications.

> **KEARNEY & TRECKER** CORPORATION


MILWAUKEE 14

There is no necessity of changing motors to gain power and speed-the range of models of Milwaukee Milling Machines makes available a specific machine amply powered for every class of job. And you can be sure of

wisconsin waukee best suited to your specific needs.

sustained precision performance because every machine is engineered and built in proper relation to its power. And remember there is a PoweRated Mil-

Milwaukee Machine Tools

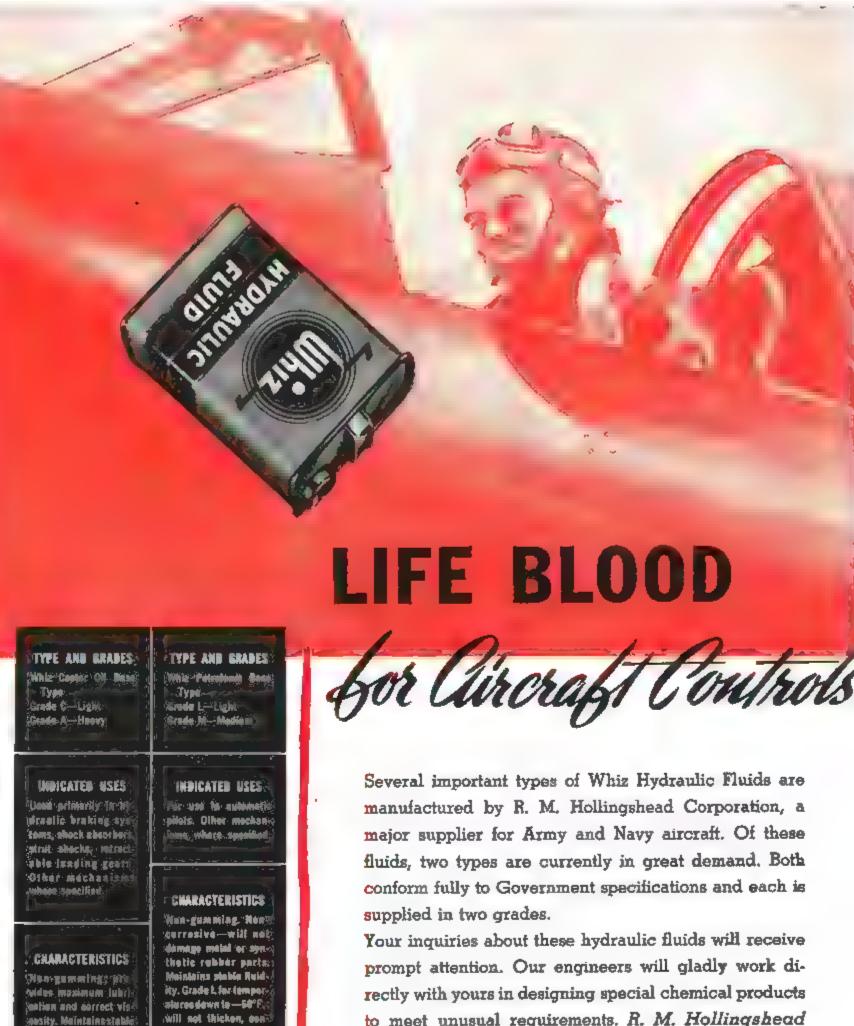

Several important types of Whiz Hydraulic Fluids are manufactured by R. M. Hollingshead Corporation, a major supplier for Army and Navy aircraft. Of these fluids, two types are currently in great demand. Both conform fully to Government specifications and each is

Your inquiries about these hydraulic fluids will receive prompt attention. Our engineers will gladly work directly with yours in designing special chemical products to meet unusual requirements. R. M. Hollingshead Corporation, Camden, N. J.; Toronto, Canada.

BUY MORE WAR BONDS!

Herdity, Grade C for

auls-zera tempetaturek

ificade de for marmi




goal, or krocas. Gradu

M davigned for one at

hemperatures of

Hollingshead

Also makers of Whiz Rust Preventive Compounds, Compounded Lubricants, Lubricating Oils, and Cleaning Compounds for Aircraft.

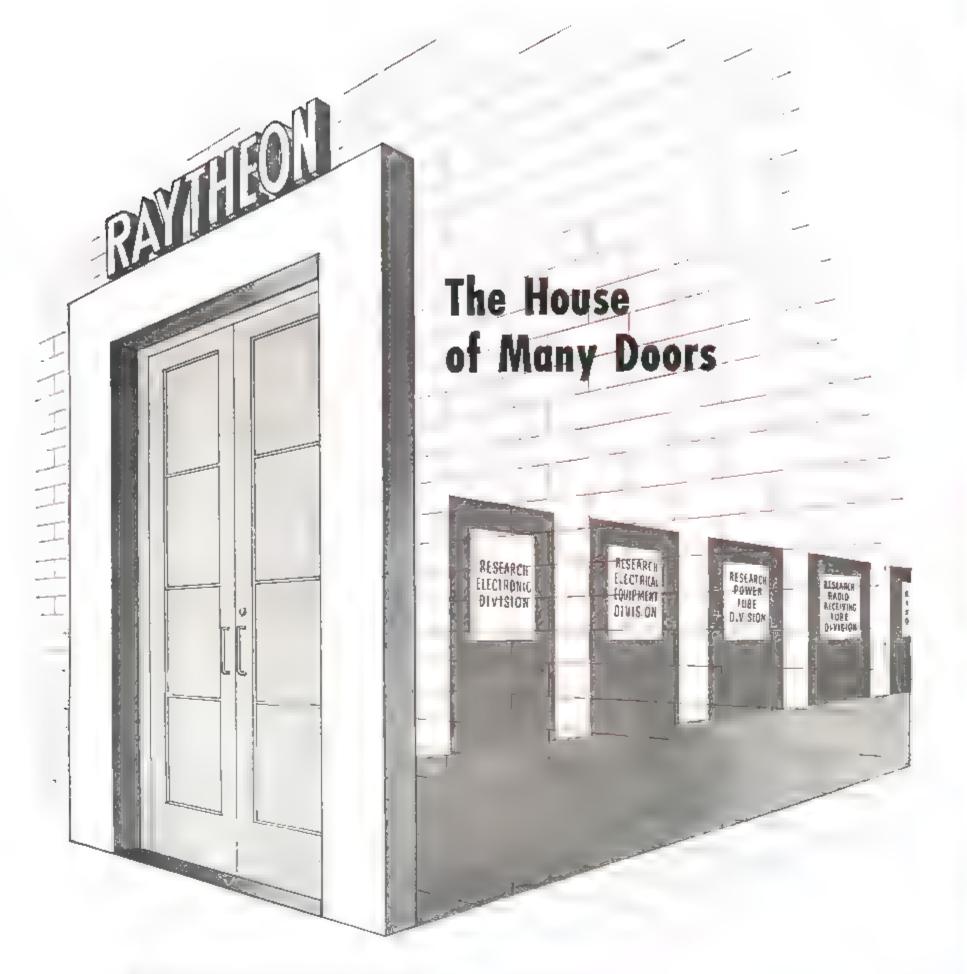

RAYTHEON is truly a house of many doors . . . doors that lead to many research, engineering, and production groups which have made great contributions to the quality and quantity of electronic equipment and receiving and transmitting tubes now helping the armed forces.

Today, behind these closed doors over 16,000 men and women


are devoted to war work. Tomorrow, these doors will be wide open and through them will come new developments in all phases of electronics.

RAYTHEON
MANUFACTURING COMPANY
Newton and Waltham, Massachusetts

Tune in the Raytheon radio program. MEET YOUR NAVY," every Saturday night on the Blue Network, Consult your local newspaper for time and station.

Devoted to research and manufacture of complete electronic equipment; receiving transmitting and hearing aid tubes, transformers, and voltage stabilizers

Designed and Engineered for Rapid, Positive Clamping, Maximum Open Clearance To Speed Assembly, Machining Operations, Metal and Plastic Stamping. For complete data, including tested pressure figures, send for the new Kwik Klamp Catalog. DANLY MACHINE SPECIALTIES, INC. 2100 South 52nd Avenue Chicago 50, Illinois

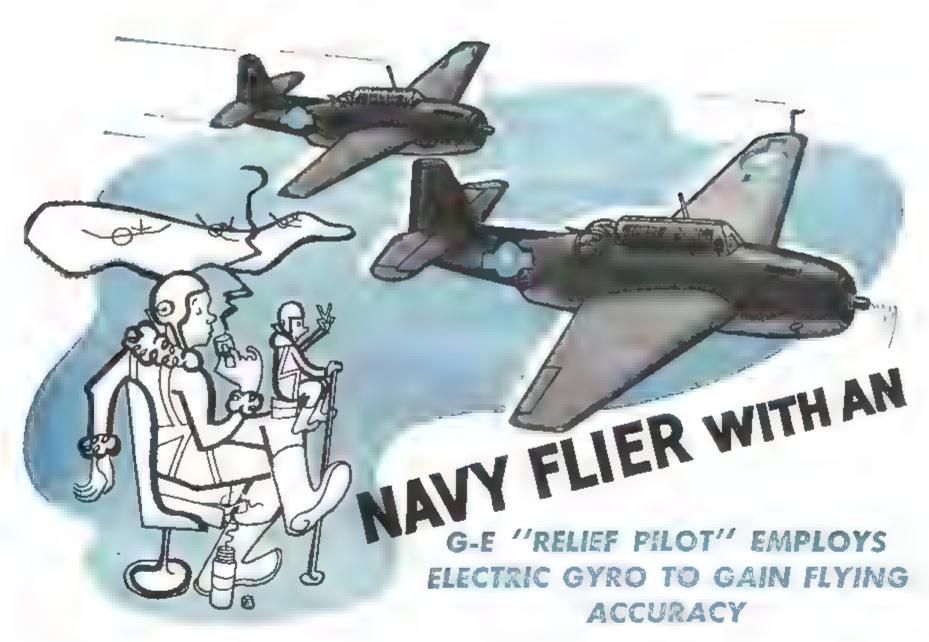

Whether he's hot on the trail of a Jap convoy or patrolling vast, lonely stretches of the Pacifie, a torpedo-bomber pilot puts a lot of faith in his automatic pilot. It must help him find tiny far-off targets. It must relieve the treacherous monotony of straight flying. And, if he's carrier-bound with "no gas to spare," it's got to hit the needle's eve.

It is no wonder then that our newest torpedo bombers are equipped with the G-E electricgyro autopilot!

HARD PILOT OR SOFT

The G-E autopilot is exceptionally flexible. It can serve as a "hard pilot" for flying where you want to sacrifice conifort for extreme accuracy. Or, at the turn of a dial, it becomes a "soft pilot," providing a smooth ride while still maintaining a high degree of accuracy. More, it can be set to automatically circle the ship at a rendezvous, or to hold a helical course to gain

The G-E autopilot offers a lot of other things, too. It is highly stable, preventing the plane

from hunting or fluttering. It is accurate at high altitudes. It is light in weight. Especially important, it is easy to service and maintain.

MOTOR-OPERATED GYRO


Heart of the G-E autopilot—and one of its principal advantages—is its electrically driven gyro. Operating on 400-cycle a-c, extremely high, synchronous speed is obtained; and, unlike air-operated gyros, this speed is not affected by altitude. This adds up to greater gyro stability and increased accuracy of control.

Further, by electrifying the units which detect and amplify signals originated by the gyro. G.E. has done away with mechanical linkages and greatly increased the system's flexibility. Simple electric controls now make it easy to adjust this autopilot for any type of flight, for any degree of stability.

The G-E autopilot is indeed an excellent example of G.E.'s ability to develop complete, integrated systems for aircraft, General Electric Company, Schenectady 5, New York.

AVIATION, December 1944



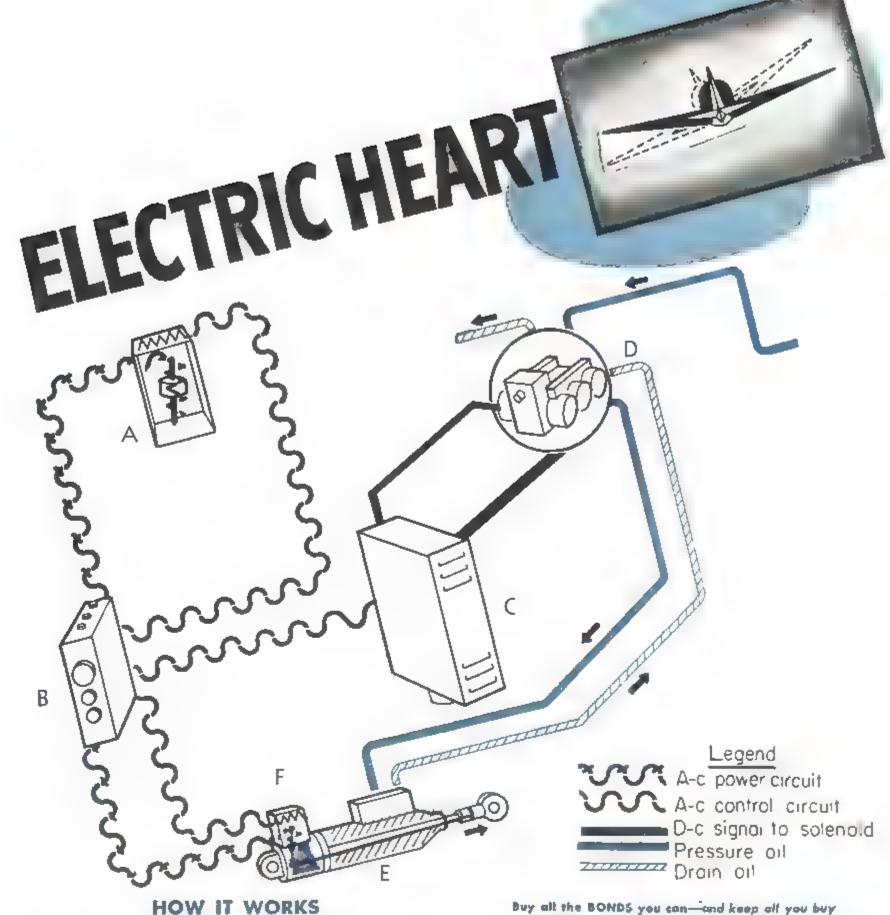

Buy all the BONDS you can and keep all you buy

This simplified schematic diagram shows the G-E autopilot in the process of counteracting left bank. The axis of the electrically driven gyro (A) remains vertical. Electric pickoffs within the gyro housing, which have rotated with the ship, detect the degree of rotation and send a signal through the junction box (B) to the servoamplifier (C). Here the signal current is amplified and rectified to d-c. The direct current then operates the solenoid transfer valve (D) in the correct direction to permit high-pressure oil to force the piston in the hydraulic system to the right.

As the piston moves, it turns the rotor of an electric follow-up device (F). Displacement of this rotor (primary), which is excited from the a-c power supply, produces a signal in the stator (secondary). This signal "works against" the first signal, gradually reducing the latter's voltage as the piston travels to the correct





Consider this special rivet, for example. Manufacturing specifications are rigid; tolerances are close, angles must be accurate where different diameters meet, the shank straight and the head concentric. Alcoa is proud to have shared in getting this item into production.

Produced in millions on headers, these rivets are then heat treated to develop maximum strength and finally given an Alumilite finish (process patented). Here you have quality and quantity production at its best, with costs held to a minimum-typical Alcoa production.

Aluminum alloy rivets make possible a maximum saving in structural weight. They offer greatest resistance to corrosion. Alcoa manufactures rivets of all types, in aluminum alloys to suit every use.

How-to-do-it information is contained in Alcoa's booklet, "Riveting Aluminum". Also available is the catalog "Standard-Screw Products" which contains weight and dimensional data on standard Alcoa rivets. Copies will be sent to you free. The sound motion picture, "How to Rivet Aluminum", depicts the making and testing of rivets, preparation of the work, the actual riveting and final inspection. This picture may be borrowed from the Motion Picture Department, ALLMENLY COMPANY OF AMERICA, 2182 Gulf Building. Pittsburgh 19, Pennsylvania.



THE FAR EAST

Frontier for American Enterprise

our frontier lies to the West. But for a United States that stretches from the Atlantic to the Pacific, to Go West is to arrive in the Far East. The feet of literally millions of our young men are now set upon that route.

Accomplishment of their objectivethe defeat of Japan-will not end our responsibilities to the Orient any more than the defeat of Germany will end our responsibilities to Europe, This time we mean to see the venture through.

The first sketch of a political program for enlisting the strength of nations of good will to enforce the peace was drawn at Dumbarton Oaks. That is a good start. But those who participated know how much work remains before the blueprint becomes a fully matured plan, the plan becomes a structure, and the structure takes life and effective being in the living imagination and will of the peoples of the world.

No political accord, however high its purpose, can endure for long if it depends upon the loyalty and support of populations embittered by hopeless poverty that is offered no promise of relief The poisonous dust of mass despair makes inevitable an ultimate explosion, whether it be sparked by a torch supplied from without or by its own internally generated heat. Much of the Far-East is sufficiently close to that position to pose a grave problem to the Western world. It is of particular importance that American business men and workers alike recognize the nature of their responsibility in the matter, for to them the great area of the East presents also an opportunity and a challenge.

The Orient-stretching in a vast semicircle from Manchuria and Japan to India and Ceylon-is the home of more than a billion people, the world's greatest potential market. In its mountains are the earth's richest stores of tin and mica; its deposits of iron ore, coal, and manganese rival those of France, Russia, and the United States. Its rice paddies are the most productive in the world, its coconut and rubber plantations the largest, and its cotton production is of major volume.

And yet, this fabulous region-with its riches of manpower and raw materials-suffers from living standards at the lowest rung of the world scale. With as much as 85 per cent of the populations of this great area devoted to the production of farm products, starvation has been an endemic plague to count-

IN THE great tradition of America, less millions of its inhabitants, and will remain so until they graduate from the crudely primitive methods of the crocked stick and the bamboo plow to the use of the implements of a modern world in both agriculture and industry

> The improvement of agricultural methods and the burgeoning of industrial development depends upon tools-a preponderance of simple tools, no doubt, at the beginning, for modernization of economic processes is a development that cannot be forced at a rate faster than the ideas upon which they depend can be developed. If we, in the United States, are to hope to supply a major portion of the implements upon which the salvation of the East depends, we must be prepared to export also the skills and technologies which will make their effective use possible.

> The possibility of a world market for machinery and manufactured products is a challenge that American industry cannot afford to ignore. The United States will emerge from the war with almost half of the world's industrial capacity within its borders, with much more than half of the heavy industries. Drastic and painful readjustments are inevitable; but they can be mitigated to the extent that we can find outside markets for the products for which we have excess capacity.

> We shall find ourselves, at war's end, in a singularly favored position to compete in any equipment markets which are open. It is not merely that we shall have the productive capacities crying for outlets. Aside from Germany and Japan, which for some time will not be in a position to compete, our two major industrial Allies, Great Britain and Russia, will face enormous tasks in providing for their own rehabilitation, Neither of them is likely to be in a position to export more capital than they absorb; and although Canada, Sweden, and Switzerland will be, the United States will stand alone as the one major creditor nation in the world. If the potential advantages of this position are managed with wisdom and imagination, they will enormously enhance our opportunities for supplying a great share of the capital goods demand of undeveloped areas.

> > 승 승 승

What is the dimension of the Far East's potential demand? What are some of the difficulties standing in the way of its being realized?

If needs were the only measuring stick, the Far Eastern market would

provide a bottomless pit into which even the great stores of our exportable capacity could be poured with room

China, alone, with its teeming population of 450 millions, has spelled out needs in dimensions large enough to stir the imaginations of the equipment producers of the world

Business Week (February 5, 1944) supplements Dr. Sun Yat-Sen's spacious first estimates of the requirements for a thorough-going industrialization program with figures provided by current Chinese planners-25,000 locomotives; 300,000 freight cars; 20,000 passenger coaches; 20,000,000 tons of steel, and 90,000 power driven machine tools for the first five years of reconstruction An American manufacturer of farm equipment, who recently surveyed the agricultural requirements of China, estimates an ultimate Chinese market for 20,000,000 tractors.

India's drawing-board plans are equally expansive. According to the bold pattern drawn up by a group of Bombay industrialists-some of whom are due to visit the United States early in 1945-India, after the war, will require a capital investment of \$2,000,000,-000 a year over the next 15 years, of which \$250,000,000 per year for the first seven years will be in the form of imported capital goods.

Included on the huge import order list of the Bombay executives are mining, roadbuilding and power station equipment, heavy locomotives, metallurgical plants, agricultural machinery, and a long list of machine tools.

There can be no question of the need of these countries for the industrial equipment-and for many items of manufactured goods-which we are so eminently in a position to supply. But realism requires that we measure this demand against the Far East's probable capacity in the relatively near future to absorb industrial goods.

A Chinese economist has estimated that China, in 1937, had a total industrial capital investment of about \$1,000,000,000 in American values, or something like \$2.50 per capita of population. In contrast, the American investment, in manufacturing facilities alone. is now more than \$600 per capita.

What it could mean in terms of capital goods requirements if China alone carries out this dream of modemizing, not to the utopian level of the United States but to the present modest level of the less developed Soviet Union, is typified by measuring just three lines: 500,000 tons of steel a

to the railroad system; 2,187,500 motor vehicles: 3,300,000 telephones.

But it is one thing to cite mountainous figures demonstrating needs. It is another, and far less optimistic exercise, to find assurance that practical opportunities for satisfying such needs can be made to materialize. Let us face some of the major difficulties and see if they are insurmountable,

章 章 章

The first hurdle to be cleared is the question of whether or not we want to promote the industrialization of the Far East. The wisdom of doing so has been vigorously challenged. The negative argument, on the economic side, generally runs thus: If we provide industrial equipment to backward economic areas, we deprive ourselves of the greater long-run opportunity of selling them manufactured articles which our aid has enabled them to produce for themselves.

It is only fair to say that such a thing might happen-that it has happened in isolated instances in the past. But the overwhelming weight of economic history demonstrates that the broader attitude is also the profitable

The United States itself is the living refutation of the fear which now cramps the outlook of many of its own citizens.

From 1790 until 1850 the foreign trade of our new fledged Nation had many of the characteristics which pertain to the trades of China and India today. We imported manufactures and we exported raw materials, agricultural products, and newly mined gold. Our imports exceeded exports, the difference being made up partly by payments to us for shipping services and partly by industrial development loans. It is relevant to inquire how the trade of the lenders was affected by this policy of supplying us with industrial capital and machinery.

From 1850 through 1939 the pattern of America's foreign trade changed. Slowly at first, and then at accelerated pace, our import ledger showed a percentage decline in manufactured goods and a percentage rise in raw materials to feed our expanding industrial facilities. But while finished manufactures declined percentagewise in our import budget, so great was the increase in our total foreign trade operations in the century from 1830 to 1930 that our imports of manufactured goods increased more than twentyfold, and they more than doubled between 1900

Clearly industrial Europe gained rather than suffered from the industrialization of the United States, and it is equally clear that we, in turn, shall benefit from the industrialization of the world's undeveloped territories. Further evidence is provided by Canada which, with its high industrial development but only 12 million people, buys

year, for five years, to add 12,500 miles from us each year almost as much as the relatively unindustrialized 130 million people south of the Rio Grande.

If it be granted, as I believe it must, that the development of Far Eastern countries will be to our advantage as well as theirs, the second question that we should face is the speed with which it can be accomplished. Is there genuine promise in the proximate future of opportunities for American enterprise of the magnitude set forth in the estimates quoted above?

In all fairness, I am forced to state my conviction that the road is longer than is indicated by Chinese and Indian leaders. It is natural, and far from censurable, that their eyes should be focussed upon the urgency of national needs, rather than upon obstacles in the way of their fulfillment.

On the other hand, it is possible that our own long process of industrialization may lead us to conclusions of undue conservatism. Ideas, once they break the crust of resistance are the most contagious of bacteria, and the tempo of their infiltration seems to increase by geometrical progression in a world of swift communication

In an interesting recent study of The International Labor Office, it is suggested that the general economic level of the rest of Asia outside Japan in the late 1930's was not dissimilar to that of Japan in 1900. Between 1900 and 1936, Japan increased its total capital investment more than threefold devoting between 10 and 17 per cent of its annual income to capital outlays, A comparable tempo of development for China, India, and other Asiatic areas would result in a capital expansion that would dwarf to insignificance the most optimistic blueprints that have been put forth to date. I am not suggesting this as a likely possibility, but rather as a caution lest we, in the name of hard-headed realism, underestimate Asiatic potentials as much as their own nationals exaggerate them.

Finally, in appraising the outlook for American enterprise in Far Eastern markets, we collide, head-on, with the problem of how we are to be paid. Here, hard-headedness can be only a virtue, for the lack of it will breed inevitable disaster for the Asiatics as well as for us.

In the last analysis, the dunension of the American market in the Far Eastern countries will be determined by the dollar exchange at their command, obtained through the products, goods, and services which they are able to provide to us, with due allowance for multilateral trade arrangements. It is true that the balance temporarily can be distorted through the extension of developmental loans. There is little question but that such loans will be in order after the war, and if they are wisely made, for productive projects that eventually will increase the ex-

porting capacities of the countries to which they are extended, they can be thoroughly justified. But the best loans provide only a temporary expedient. In the long run, the balance of current payments must be restored with sufficient margin to provide interest payments and finally amortization of prin-

14 拉拉

How, then, are we to attack the problem of increasing our imports from the Orient?

In 1937, the total exports of the Far East amounted to something over \$5,-000,000,000-a Little less than \$1,500,000,-000 in foodstuffs, a little more than \$2,500,000,000 in raw and partly manufactured materials, and better than \$1,000,000,000 of manufactured articles. Of this total, the United States purchased only about 20 per cent-approximately 10 per cent each of the foodstuffs and manufactures, and 30 per cent of the materials.

Despite changes in our technologies which will probably reduce our future takings of such important items as rubber and silk, the achievement of a high level of economic activity in this country after the war will provide a basis for increasing our Eastern imports, but only if it is an accepted part of our national policy to do so.

This means an alert and aggressive exploration of two-way trade possibilities on the part of both American business and our governmental agencies. It cannot be done by either alone.

The war has dislocated many of the trade patterns that prevailed in the past. The East is hungry for the type of products which we, uniquely, are situated to supply, but it will make its bargains with those who will not only fill its needs but will also provide outlets for its produce. Even the prewar magnitude of the exports from this area provides ample margin for the most meticulous and imaginative shopping of Eastern markets with the aim of increasing the modest share of our prewar purchases. And a farsighted program of development loans can greatly increase the capacity of these countries to produce what we want


In general, we can trust American enterprise to explore rigorously all likely export opportunities. But the equally vigorous investigation of import possibilities will require a break from past traditions on the part of American business and American gov-

Both East and West must learn to think in new patterns for the successful opening of a new frontier.

Mul H. W. haw.



The Walter 250 h.p. Snow Fighter, for example, clears a 28 ft, width in one run at 20-30 m.p.h.throwing snow far to the side to eliminate dangerous banks. This performance is possible only that slow down or stop conventional trucks. Get this highest snow-removed-per-hour performance at your airport. Write today for complete information on Walter Snow Fighters,

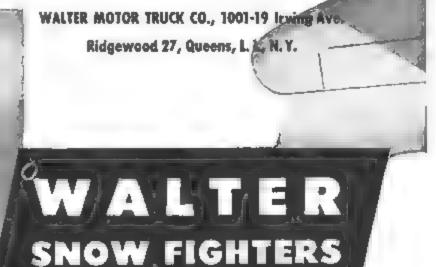

THIS IS THE 302H OF A SERIES

This advertisement is one of a series which is appearing in national magazines and newspapers as Consolidated Vultee's contribution toward a clearer public understanding of transportation's role in the war, and its postwar opportunities and responsibilities.


To Australia - AND BACKin 95 hours and 20 minutes!



12:00 midnight Sunday: A huge Liberator Express, loaded with a secret cargo, roars down its California runway and soon dwindles to a speck on the horizon. The dispatcher checks off another routine flight for CONSAIRWAY. the military airline established in 1942 by Consolidated for the Air Transport Command.



So for, CONSAIRWAY Laberators have made 1764 4 so far, CONSAIRWAY Business a total of round trips between the U.S. and Australia as total of 25.900,000 over water maes, without a single fatal accident. The original Liberator that proneered the Australia run bas now completed 84 round trips and is still going strong!

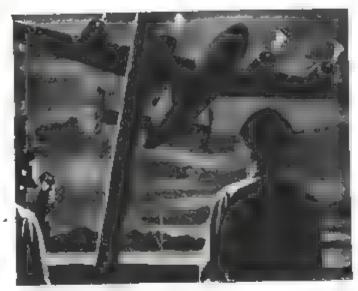


10:30 p. m. Tuesday: The ground crew at an Australian 2 airport speedily unloads the Liberator's high priority cargo . checks the engines heaves aboard tons of moil for the U. S. A. A new "Pony Express" flight crew jogs out, chmbs aboard, and the giant transport streaks down the run-




5 sorn of war, CONSAIRWAY a job, in the beginning.
was to bring back Ferry pilots who had delivered bombers to the South Pacific Westbound cargoes today as then, consist of tons of spare aircraft engines and parts, medical supplies, and amounition in short, any supplies that are needed fast by our fighting men ' Down Under "

AVIATION, December, 1944

CONSOLIDATED VULTEE AIRCRAFT

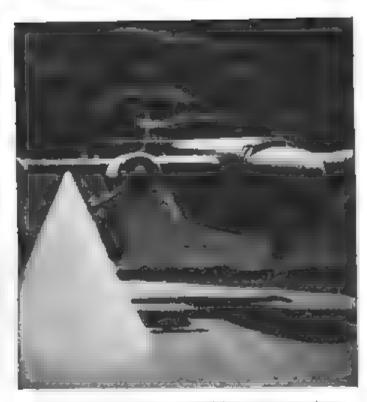

3 11:20 p.m. Thursday: The Liberator contacts the con-trol tower at its California airport ... CONSAIRWAY plane No. 10 coming in "... and it a back home again. Since it left that same airport, 95 hours and 20 minutes ago, the land-based Liberator Express has logged 14,690 miles over the Pacific to Australia and back!

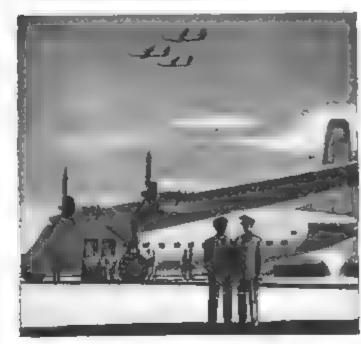

After the war, long range Liberator planes will con-6. time to supplement other forms of transportation - the train, truck, and ship-in rebuilding the peacetime world. But airplanes will also have another role to fulfil a permanent postwar Air Force can become America's soundest investment in the interests of a lasting peace.



No spot on earth is more than 60 hours' flying time from your local airport

From "Flying Jospe" to Levisthans of the air - The planes shown below were all designed and developed by Consolidated Vultee. When peace comes, the company will be in a position to provide the postwar equivalent of such planes, from small, privately owned 'air flivvers" to huge, transoceanic cargo-and-passenger planes.



















QUICK FACTS FOR AIR-MINDED READERS

Atlantic "Milipond" - So far, during the war, Alfred aircraft have flown more than 15,000 Atlantic Ocean crossings

Life Sever- Probably one of the ama lest warplanes in use, the famous Consolidated Vultee 'Flying Jeep' has added a new job to its many other uses. Modified as a flying ambulance (capacity I litter) it a speeding wounded men to base hospitals from small judgle flore new and other the gle clearings and other in-accessible apots

Postwar "aky roads"—20,000 air strips, placed 10 m es apart in a pattern of squares, would cover the country. Ade-

quately marked, they would enable the postwar small-plane owner to travel cross-country without learning a complicated system of navigation. Cost per strip \$6000 (about 4 the cost of I mile of national highway).
"It is becoming increasingly

clear to an air minded America that a greatly expanded An Transport, a permanent postwar Ar Force, and a hearthy, competitive Arcraft Industry will be important factors in helping to maintain a lasting peace and prosperity "Tom M Girdler, Charman of the Board, Consolidated Vulter Arcraft Corporation.

Consolidated Voltae is the largest huilder of airplanes in the world-

CORPORATION

Fort Worth, Texas. New Orleans, Lo.

Bearborn, Mich.

Elizabeth City, N. C. Miomi, Fla.

THERE'S NO ELIXIR TO CURE YOUR CLEANING PROBLEMS



IT'S REALLY

Relite has developed scientific cleaning and processing through pH Control. pH Control is the "yardstick of chemistry." Just as degrees Fahrenheit are a measurement of temperature, or inches a measurement of lineal distance, or pounds a measurement of weight—so pH is a measurement of cleaning effectiveness when used in the copyrighted Kelite method.

Soil, grease, corrosion, paint, fruit stains, yes, in fact every substance in the universe has a definite location on the Kelite pH chart. Thus it is simple to select a material of correct pH value to

THAT DOES THE JOB!

reduce contamination to a neutral state, or to break the adhesion of an undersirable coating, or to dissolve a substance so that it may be easily rinsed away.

Every Kelite Service Engineer is equipped to do pH testing

right in your plant. His demonstration may seem like sheer magic to you, but he is really only applying a modern scientific principle to the age-old problem of cleaning.

Kelite invites your inquiry.



INDUSTRIAL CHEMICAL PROCESSES AND MATERIALS



Copyright 1944, KELITE PRODUCTS, INC. 909 E. 60th St., Los Angeles 1, Calif. Mig. Plants: Los Angeles, Carcaco, Pratta Amort, Houston Branches in principal cities.

Firm as fixed Bayonets ... that's why AMERICAN PHILLIPS SCREWS drive Faster... Straighter... and Cost Less to Use Like a bayonet fixed on a gun, an American Phillips Screw can't wobble, twist off, or drive any way but straight. For the engineered, tapered recess in the American Phillips screw-head fixes the 4-winged driver firmly in position . . . makes screw and driver an inseparable, straight-line driving unit until the screw is set up flush and tight. This brings new ease and speed to production screw-driving ... makes power drivers practical for any type of work ... prevents accidents, scarred and rejected work, loss from split screw-heads. That's why over-all savings, in plant after plant, score American Phillips Screws at 50% or better, over any other type of screw fastening. What's more, American Screw Company inspects every American Phillips Screw . . . for physical fitness of head, thread, and point . . . then checks shipments by automatic weigh-count to assure full value. Try American Phillips Screws on your own assemblies. You'll find they cost less because they help you produce much more. AMERICAN SCREW COMPANY, PROVIDENCE 1, R. I. Chicago 11: 589 E. Illinois Street Detroit 2: 502 Stephenson Building AMERICAN 4-WINGED DRIVER CAN'T TWIST OUT OF ENGINEERED TAPERED RECESS IN AMERI-CAN PHILLIPS SCREW HEAD Put the Screws on the Japs BUY BONDS!



You're safe, you're sure, when you specify Bendix Landing Gear equipment, because we've made it our business to make certain it's right before it ever leaves the factory. Every Bendix Landing Gear part goes through the toughest tests science has devised. A giant 30-ton dynamometer checks the stopping power of the brakes at all landing speeds. Massive drop-testing machines assure an ample margin of safety against landing shocks. Struts are

BENDIX LANDING GEAR - Bendix Pneudroulic Shock Struts, Cylinders, and Power Brake Valves are important members of

wrenched, twisted, tortured to make sure they'll stand the gaff . . . make sure they'll more than measure up to all requirements.

These reasons explain why Bendix is the choice of leading aircraft manufacturers. Bendix Landing Gear is engineered to meet your specific needs . . . "tailor-made" to fit your weight restrictions, space limitations, performance requirements . . . an outstanding example of the Creative Engineering which has won Bendix leadership in so many aviation fields. "You're sure when you specify Bendix."

Bendix Airptone Wheels, Airptone Brakes, Hydrautic Master "The Invisible Crew," produced in more than 30 Bendix plants,

Bendix

AVIATION, December, 1944

The Parley Made Strides But There's Much to be Done

ROGRESS MADE at the International Civil Aviation Conference was distinctly heartening from two major aspects. First was that the delegates were, almost from the very start, in general agreement on the fundamental question of air sovereignty and the right of innocent passage and landing on foreign soil for refueling and servicing. Fortunately there is no disposition to establish closed zones or discriminating arrangements involving the rights of nations or groups of nations to portions of the air.

Thus there promises to be a sound groundwork for the development of postwar international air transport as an instrumentality for peace and prosperity rather than a breeder of future wars.

Perhaps even more important was the progress made toward closing the very wide gap between the American and Anglo-Canadian delegations regarding the question of the power which should be granted an international air authority. Originally the Empire delegates sought establishment of a body with power to license world air routes, fix schedules, and establish rates but, as this was written, they appeared to have made concessions bringing them more in line with American and other delegations' ideas of restricting the body to consultation and technical functions, allowing a greater degree of freedom for world airway development (also see pages 119 and 227).

HE ORIGINAL DISAGREEMENT was the product I of a long-felt fear on the part of the British that we would gain an advantage over them as a result of our extensive world air transport operations during the war. But they seem to forget the fact that they, to, have established airlines in many parts of the world and improved their operating techniques tremendously in the past few years. And they, too, have developed designs for postwar commerical aircraft far more efficient than those they were operating prior to the advent of the war.

Conquest of the air knows no national boundaries and no nation has a monopoly on scientific discovery. The fundamentals of the aeronautical sciences are available to everyone, allies and enemies alike, and whoever blends them most ingeniously into a given design holds temporary leadership. It is unsound for one nation to freeze development until another catches up, because the state of the art at any given time is unimportant.

What really matters is the continuation of research, design development, and perfection of operating technique. Eternal research and application is the price of leadership for any nation.

If our progress were halted, even for a moment, it would represent a great disservice to our allies because air transport is one of the three basic elements of airpower. And it is only through possession of superior air power by nations of goodwill that it will be possible to maintain order in the world after it is restored.

TN THE MANY CONFERENCES that must follow be-I fore the detailed pattern of postwar aviation is woven, it is vitally important that the representatives of all nations take the broader view of the problems of civilian aviation. We cannot close our eyes to the truth that air transport is a basic ingredient of airpower, just as the merchant marine is in sea power. Air transport and military air forces, backed by a strong aircraft production industry constitute the only sound aviation program for any nation.

If we project into the third dimension the timetested British policy of a properly balanced navy, merchant marine, and shipbuilding industry, we can find a formula for postwar airpower which will preserve peace and order and promote national and international prosperity far into the future.

Jeslie E. Venle

Gas Turbines For Tomorrow's Superpower

By G. GEOFFREY SMITH, M. B. E.

A thought-provoking analysis by the noted British writer, who frankly appraises the problems to be solved to achieve utmost efficiency from turbine-compressor power units in the postwar era.

evidence is mounting that the gas turbine power plant presents a definite challenge to the hitherto all-conquering reciprocating

attributes that its claims to serious recognition are too strong to be resisted. In the postwar engineering world, power generation is almost certain to be revolutionized by further development of the gas turbine-compressor unit.

Outstanding among these attributes -and most thought-provoking for aircraft designers-are the turbine-compressor unit's small size for the power jet aircraft, however, too much empha-


ESPITE PRESENT LIMITATIONS, delivered; the ease of manufacturing and maintenance; and, perhaps most important, its adaptability for "tailormade" design.

Fortunately the turbine and comengine as the power plant for future pressor can be adapated to produce either a continuous high speed jet suffi-The gas turbine possesses so many cient to propel aircraft by reaction or, alternatively, arranged so that mechanical power may be derived from the common shaft on which the two components rotate. It is in the latter category that immense scope is offered for the application of gas turbines as prime movers, especially for large transport aircraft.

Since release of the joint Anglo-American announcement of successful



G Geoffrey Smith, M.B.E. editorial director of the British magazines "Flight" and "Aircraft Production" and author of the book "Gas Turbines and Jet Propulsion for Aircraft," is one of the pioneer advocates of the turbine-compressor unit for aircraft power. In the accompanying article he gives stimulation for research and development along new lines leading to continued Anglo-American

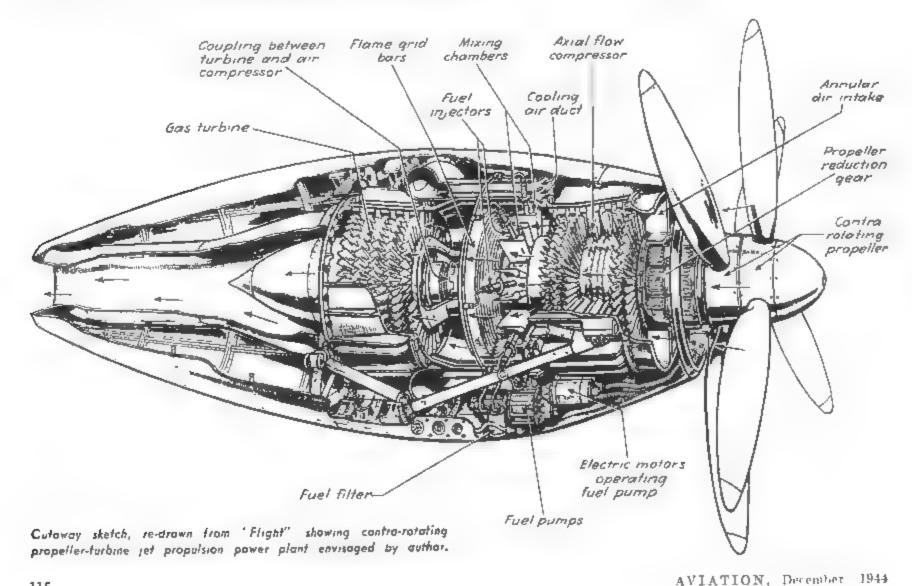



120-ff. span. Four or more turbine-compressor units would be buried in wing, with the two inboard driving contra-rotating propellers and

the authorid pair producing propulsive jets. Air intekes for turbines would be utilized for boundary layer control. (Courtesy

sis has been placed on jet propulsion. rather than on the turbine which produces the jet. In the long view, perfection of the small gas turbine is of far greater significance, for it offers a means of providing a smooth, contimuous flow of power from rotative units hitherto unattainable. It represents the second stage of the attack of rotative power units upon the orthodox reciprocating type.

In design thinking, the turbine should be regarded as a prime mover, able to perform the work of an orthodox engine by driving an airscrew, or even a series of airscrews. Some engineers, of course, back the simplicity of the propulsive jet, particularly for interceptor fighter craft. Others are equally confident that the turbine driving airscrews holds the greatest promise. Still others maintain that combinations of turbine-driven airscrews and pure jets will provide the answer

The advent of small five-blade airscrews permitting an increase in rpm. without raising tip speeds to excessive levels opens up new possibilities. Coaxial, contra-rotating units offer even further avenues of development in this

direction. The implication remains. though, that the reciprocating engine will experience a greater direct challenge than jets present to airscrews.

That this challenge means there is much to be overcome in developing the turbine is shown by history so far. Prior to RAF Air Commodore Frank Whittle's mitial success-back when he was a Lieutenant-many had already worked on the problem. What passing references there were in technical literature when he filed his first patents in 1929-30 all tended to suggest the turbine had little or no future. As much as 75 percent of the power developed by the turbine was absorbed internally to drive the indispensable compressor. In other words, a unit equivalent to 8,000 hp, might deliver as little as 2,000 hp. in the form of thrust pounds.

This ratio of positive to negative work was early seized upon by critics who pessimistically argued that the work of compression (the negative work of the thermal cycle) was so large a proportion of the work done in expansion (the positive work of the

This ratio of positive to negative work is obviously of the greatest importance. Naturally, the bigger it is the better, just as in airframe design the aim is a high thrust/drag ratio. What Whittle firmly believed was that metallurgical progress would provide materials capable of withstanding much higher temperatures and thereby contribute to increased efficiency. He steadfastly refused to accept as axiomatic that the efficiencies of the two main components-compressor and turbine-could not be raised to a practical stage.

With temperatures of better than 1,200 deg. F. freely talked of, and higher temperatures definitely coming, his early aims have not only been attained but, with heat exchangers and intercoolers, bid fair to be exceeded. With the thermodynamics of the aircraft turbine under a strict veil of military secrecy, it is impossible to say how fast and how far these develop-

The case history provided by the almost meteoric rise of the turbinecompressor unit provides the best of cycle) as to make the unit unsuitable. arguments for maintaining an open

mind on these and other discoveries and to continue research and development, by collaboration between our two countries, of all promising schemes of this character.

Turbine-Propeller Combinations

Developments to date have brought general agreement that many aircraft of the future will have turbine power plants, but whereas jet propulsion is essentially suited to certain special forms of high-speed high-altitude types with pressurized cabins, efficiency is at its lowest point at low altitudes and low speeds, and the rate of climb (not the speed of climb) as well as takeoff, are not yet comparable to airscrew efficiencies. It is evident, therefore, that for large postwar aircraft the tendency will be to employ gas turbines driving airscrews, probably of the pusher type.

There is, in my estimation, one outstanding reason why pushers rather than tractor type airscrews may be employed on postwar aircraft. The comparatively small, simple turbine of almost cylindrical shape, devoid of excrescences and projections which inevitably create parasitic drag and airflow turbulance, is particularly convenient for enclosure within the wing or fuselage. By reason of this total enclosure of a unit of relatively small dimensions, better structural form of the aircraft can be employed to reduce the boundary layer of air or profile drag. Much of the enhanced speed which jet-propelled aircraft have demonstrated can be ascribed to the smaller, lighter, and more perfect aerodynamic structures that the compact turbine has rendered

The process of joint evolution of

aerodynamically perfect structures and compact turbine power units will bring still greater contributory benefits in its train and at the same time revolutionize the external appearance and dimensions of aircraft as development proceeds.

Turbines will be much more special and tailor-made to the type of aircraft under design. It is probable that the airframe designer, working in close conjunction with the turbine designer, will determine the size of the power plant; he will ask for a turbine installation of a given size and thrust power. He will not have to build his aircraft around an engine just too small or just too large.

There is also the fact that the airframe designer should be able to get his desired power plant in fairly short order. Since turbine-compressor power plant thrust output follows a geometric ratio to size, the design and production problems are greatly simplified and valuable time can be saved. Therefore, the tailor-made feature of the power plants should not greatly affect costs of the completed airplane, even on production runs which by today's standards will seem small.

This rapport between power plant and airframe designers will become a paramount issue as the speeds inherent in jet-propelled craft come out of the wartime laboratory, for they bring the aero-dynamicist slap up against boundary layer control problems,

And in any consideration of turbopowered aircraft, the necessity for providing air intake for the turbine can be turned to advantage by arranging the air intakes to exert an influence on the boundary layer airflow.

But as a first stage in the evolution

Four possible power plant arrangements for flying wing suggested by author. A contains four continuous combustion turbine and axial compressor type jet propulsion units; B, two turbine-driven contra-rotating propellers, and two jet propulsion units; C, two reciprocating engines turning contra-rotating propellers, and two jet units; and D, two reciprocating engines turning pusher propellers, and two jet units. (From "Gas Turbines and Jet Propulsion," courtesy the author.)

to this form of design, turbines in the early postwar era will probably be mixed with four-stroke reciprocal engines on multi-engine craft, a notion I have already advanced. The feasibility of employing four high-powered turbines on large airliners, two inboard driving airscrews and two outboard producing propulsive jets, was also envisaged. Such a combination offers certain contributory advantages both at low and high altitudes.

At extreme heights, for example, the orthodox engine tends to flag in the rarefied atmosphere and propeller efficiency falls away. On the other hand, the turbine begins to gain efficiency with increased altitude and speed. Just as the lower temperature of the atmosphere appreciably assists efficient operation of turbine-compressor units, the thinner air offers less resistance to forward speed, back pressure to the jet is reduced, and the resultant increase of speed provides a beneficial ram effect of cold air through the compressor to raise efficiency of the complete cycle of operation. A mere percentage increase in the efficiency of the compressor will result in a marked increase of efficiency in the complete

Research Essential

To attain higher compression ratios is a problem of the moment, but encouraging investigations into the possibilities of thrust augmentors and heat exchangers indicate that, as in other turbine problems, the answers will be found.

Nor does it seem that, with a continued open-minded approach by the aircraft industry, together with diligent research and development, we will have to wait as long as might be supposed for the answers. At a moment when the call is for very high-powered engines for the large airliners already being projected, the smooth, light, compact, all-rotary gas turbine assumes greater importance.

It is easier to design and produce a gas turbine of 5,000 hp. (or its equivalent in thrust) than one of 500. There are fewer unknown factors. If speeds of 500 to 600 mph. are the aim, and passengers are ready to fly in the troposphere—possibly the stratosphere—in pressurized cabins, then the turbine-jet has no match.

I confidently envisage regular trans-Atlantic crossings between dinner and breakfast, and the cost won't be outrageous to important business men. Although British engineers frequently quote ten years as the necessary development period before this era is reached, my own view is much more optimistic in line with the American thought



THIS Is Our Air Policy—So Far

Not until the Chicago Conference did the American public or aviation industry know what their government's proposals would be on this vital postwar question. Here is a digest of the salient points.

public was given an inkling of what this country's international air transport policy might be like when A. A. Berle, Jr., Assistant Secretary of State, opened the International Civil Aviation Conference last month.

Since it is almost diametrically opposed to initial British views, and since Congress hasn't yet had an opportunity to consider it, the policy may well be drastically altered before ever becoming an operating force. Here, however, are the basic premises upon which this country, perforce, is attacking one of the most important of postwar questions.

The United States believes, according to Mr. Berie's statement of policy, that each nation has a right to maintain sovereignty of the air over its land and territorial waters. Consistent with that sovereignty, nations should subscribe to rules of intercourse between friendly states whereby air navigation shall be encouraged and commerce fostered between all peaceful states.

Regarding passage through the air, this government takes the view that we are in a stage calling for development of friendly permission. This friendly passage, of course, "can only be availed of, or expected by, nations which themselves are prepared to accord like

privileges and permissions." Accordingly, the United States proposes "that there shall be an exchange of the needed privileges of intercourse between all friendly nations and, in such exchanges, no exclusion or discrimination against others." This right of communication, however, does not imply the "right to wander at will throughout the world;" there is at present "little place for tramp trade."

Having made public the routes for which the United States will endeavor to obtain permits, "it is prepared to discuss like permissions with other countries seeking intercoruse with the United States." This country further feels that, in addition to route agreements proposed, that there is a basis for attempting now an air navigation agreement which will modernize and make effective the rules of air navigation

Taking a definite stand against a powerful international governing body—keystone of Britain's proposals—the policy statement declares this country believes that international organization at this time in economic and political fields must be primarily consultative, fact-gathering, and fact-finding, with power to bring together the interested states when friction develops; with power to suggest to the coun-

tries possible measures as problems existing and unforeseen come up; and designed to set up a system of periodic conferences which may lay out and agree upon . . . the necessary rules."

The possibility of later support for a governing body with wide powers is not, however, completely ruled out, "but it would be neither statesmanlike nor practical to pretend that" the time is here yet.

This country adheres firmly to the principal of cabotage on an individual nation basis, "for if a number of countries were to combine to pool their cabotage as between each other, the result would be merely to exclude nations not parties to the pool, and it is the firm conviction of this Government that discriminatory or exclusive agreements are raw material for future conflict."

This country will make available, on non-discriminatory terms, civil transport planes to those countries which recognize "the right of friendly intercourse." Such planes will be released when the military situation permits.

Based on the assumption that "no country can expect at present to have wide-flung aviation lines without subsidies," this country "is prepared to discuss ways and means by which minimum rates can be agreed upon and by which the subsidies which are involved in all transport trade shall be used for the purpose of legitimate air communication, but not for the purpose of assisting rate wars or uneconomic competition."

To get desperately needed pilots quickly, Gen. H. H. Arnold far-sightedly turned to commercial flying school operators who not only trained cadets, but did it for less money. Now, says an outstanding operator, is the time to be sure we-

Keep Those Contract Schools Going

By EARL D. PRUDDEN

Vice-President and General Manager, Ryan School of Aeronautics

TNSTINTING PRAISE for the fight- to realize that in that accomplishment, ing successes of the American air forces is justifiably unanimous. John Q. Public knows his air organization is the finest in the world.

But how often does this same citizen give credit for the huge dollar-andcents economy of this operation to any branch of our military organization, particularly the Army Air Forces?

The story of the overnight expansion of the training program of the United States Air Forces has been ters. cited as a military saga that has no parallel. However, few persons seem overnight expansion of pilot training

commercially-operated flying schools played a role of truly vital importance.

Now, when the part of these schools in this phase of the war is being reduced, is an appropriate time to review their records as a basis for establishing the desirability of continuing the program in peace time by maintaining a minimum of highly-qualified commercially operated primary schools in each of the Air Forces' three training cen-

Faced with the need for tremendous

in 1939, Gen. H. H. Arnold adopted the militarily unorthodox procedure of calling to his aid a group of civilian flying school operators whose commercial operations and geographical locations entitled them to consideration.

The loyal fraternization peculiar to pilots, and their steadfast faith and confidence in Gen. Arnold's ability, accomplished what would otherwise have been impossible. An enlarged AAF was an overnight reality, and the general's faith in the commercial operators, was according to military records, fully justified.

This program saw approximately 64 civilian schools, members of the Aeronautical Training Society, charged with the responsibility of giving all of

Besides saving manpower and money, civilian flight school operators training Army Air Force codes pilots got accident rates down to an all-time low and graduation rates up to new peaks.



the primary flight and ground school instruction to the thousands of cadets who have been added to the U. S. sky forces since July 1, 1939 (when our air arm was so pitifully small).

Had failure resulted from this experiment in the use of civilian contractors for what had always been a military prerogative, there would undoubtedly have been a chorus of objectors from both military and civilian life who would have agreed that it should not have been tried in the beginning.


Today, however, the program is by every yardstick of accomplishment a proven success. Nevertheless, only a few voices have been raised to extend the appreciation of the taxpaver to Gen. Arnold and the Army Air Forces, or to encourage the continued use of the civilian contractor as operator of the Army Air Forces Primary Training Program.

It has been estimated that more than 100,000 military personnel were released for combat or other active military duty as a result of the civilian contractors' ability to use personnel of all ages and physical classifications without restriction by Army requirements. The close bidding for contracts and the searching scrutiny given to the training program by the Army's contract department resulted in an estimated saving of more than \$250,000,-000 of taxpayers' funds. This saving is far greater than total Air Forces appropriations during some prewar vears.

In addition to the manpower and financial saving which resulted from this precedent-breaking type of civilnan-military collaboration, is the startling and gratifying fact that the accident rate for this civilian conducted activity has dropped to an all-time low and the graduation rate for cadets has attained a peak never before approached.

For a new high in efficiency and farsighted desire to accomplish the greatest good with the least expenditure of cash, manpower, and time, American business men and taxpayers owe a vote of thanks to Gen. Arnold and his staff who, in 1939 were willing to push aside military precedent to accomplish the desired objective.

gressmen, and particularly our Military Affairs Committees, will do well to study and analyze the excellent record of the 64 commercial flying schools which so capably gave the Army its primary flight training pro-

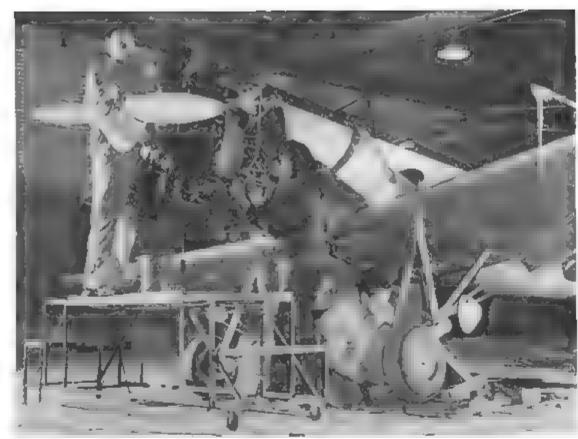

Commercial contractors, using non-military personnel to train sorelyneeded pilots, have saved U. S. taxpayers more than \$250,000,000.



"It has been estimated that more than 100,000 military personnel were released for combat or other military duty as a result of the civilian contractors ability to use personnel of all ages and physical classifications without restriction by Army requirements."

gram in the postwar era.

The use of properly qualified commercial flying training schools under United States Senators and Con- the careful supervision of Army authorities can accomplish the desired results at lower cost and greater efficiency than could be equalled by a return to the former plan of military training by military personnel. At the same time it will develop a broad gram with unexpected economies of civilian base for immediate overnight operation. And John Q. Public can expansion of our Air Force if necesdo well to express his vote of con- sarv. This is certain to serve as a fidence in the plan by demanding a constant challenge to any nation which,

continuation of this satisfactory pro- in the future, may be bold enough to consider the United States as a military opponent.

Continuing the integration of these strategically located, highly developed, thoroughly tried and proven commercial flying schools into the postwar pilot training program will have many beneficial effects. Not the least of these is the continuation of a longestablished, proven American idea that its military springs from and is perpetually a part of-rather than a dictator to and standing apart from-the (Turn to page 262)

HERE'S YOUR LOCAL MARKET

By FRANK S. CHRISTIAN, H. S. Humphrey Co.

A practical, working plan by which dealers and distributors can accurately determine the potential volume of individual territories -together with key merchandising suggestions to insure success once the market area has been staked out.

brave souls who proclaimed themselves to be "in the business of selling automobiles?"

Crackpots they may have been, but they were also often the smartest men in town. Thousands of those who stayed with the automobile made independent fortunes and in many cases are today themselves the leading citi-

So it will inevitably be with the airplane. Those who devote themselves to aircraft sales and distribution will create a new generation of successful businessmen. The airplane has gone through its long years of costly trial and error, growing up almost overnight in meeting its heavy war responsibilities. The personal plane is about to take its place as an important means of transportation in America; it is no longer the toy of the playboy or the outlet for the thrill-seeking daredevil.

Common sense has come to the fore, as it always has in the development of American industry when the time has come for serious expansion.

There are those who have predicted that the air will be black with a swarm of planes bearing people no longer earth-bound. Others predict that every garage will house a helicopter. That may well be true some day-but it's today that we must concern ourselves with in aircraft distribution. We know that those who fly from, say, New York to New Orleans and then criticize the personal plane as too expensive, too slow, and not as practical as the airlines, have failed to conceive the real and logical function of the personal plane.

Precious few people use their automobiles for long trips where time or over-all expense are considered. Public transportation is still cheaper, and on long trips it is faster and more restful than the automobile. How many busi-

EMEMBER NOT SO LONG AGO when ness men would drive from New York the leading citizens of your city to Chicago, for instance? Few. The pointed out as crackpots those train carries them comfortably, utilizing sleeping time. Commercial airlines do the job still faster, easier, and as inexpensively.

> But our personal cars are a necessity, and the day when our personal plane will take its respective place in our daily lives is near at hand. Expect the personal plane to enlarge a person's normal sphere of activity to three times that which is normal for his automobile, and you have a practical application of the utility of the personal plane. That sphere may some day become greater. But right now we're talking about today with planes we know will be available when manufacturers can again devote their efforts to making consumer goods.

Just as highways made possible the sale of 29,000,000 automobiles, airports will open up the market for personal planes. The CAA plans 3,000 more airports, to be built as quickly as possible after the war is over, to supplement the 3,000 already built. The Aeronautical Chamber of Commerce has been working vigorously on its airpark program (landing facilities in

AVIATION'S widely used series titled, "Here Are Your Markets" [May, June and July AVIATION), presented basic aircraft and accessory marketing data for manufacturers, distributors, and dealers for the 48 states and the country as a whole.

With that series as a background, we are proud to present the accompanying article, specially prepared by a marketing authority to assist dealers and distributors in establishing themsalves in their chosen territories on the sound basis so essential in building the true big-business operations that will be vital in the personal plane fia d

-THE EDITORS

every city and town including easily seen and understood avigational markings) and with outstanding success. Word comes daily to the Chamber's Washington office of more and more towns and cities which have joined in the program. Progressive civic leaders have already started in large numbers to put their community on the nation's air map just as the highways put them on the road map,

CAA regulations which were cumbersome, and in many cases absurd, in their restrictive measures are currently undergoing changes which will eventually make the rules and regulations for the use of a personal plane as reasonable as those which today apply to the operation of an automobile.

Other things which are undergoing change to fit them for the inevitable aircraft volume market are insurance and aircraft service. In the past, both were limited in their development, but insurance companies are expecting much greater volume and they particularly recognize the technological advancements in aircraft and aircraft

Already planes such as the Skyfarer and the Ercoupe have been developed -both are non-spinnable craft with but a wheel and a throttle for the newcomer to master. No long hours of practiced coordination are necessary to learn to fly such planes, and volume will lower the plane's first cost.

Plane manufacturers are tooling today to build thousands, where before they built hundreds. The war has taught manufacturers the importance of designing and building planes that can be easily and quickly serviced. War has also produced thousands of trained aircraft service men, tools, and machinery.

These things are either already accomplished or are in the process of accomplishment right now-today.

The business of selling these thousands of planes which are being planned by the manufacturers comprises the problem which is probably the most vital of all in the movement to get for America's new huge industry the necessary volume of consumer

There are some among the ranks of prewar distributors of aircraft-the field totaled only 51 in 1940-who will

do little or nothing to fit their plans to a new, larger, fast-moving aircraft market. The great majority were those who spent most of their efforts selling rides or giving lessons and renting time. Competition did not then demand much else, and sales were a side line. However, many do realize the need for a change and will do something about it. Still others, entering the field of aircraft sales for the first time (one out of every three auto dealers report plans for aircraft dealership) will be aggressive in their thinking and planning, and will bring with them successful sales and merchandising experience.

Previously the market for the personal plane was limited by the craft's utility, which was restricted by the lack of airports, of service facilities, and of proper regulation, etc., not to mention factors of performance. This meant a financial inability to attract and pay for merchandising brains and experience.

Four Major Considerations

Let's take a look at the more important problems confronting a prospective distributor or dealer who has decided where he is going to operate. He is immediately confronted by these four major questions:

I. What plane or planes should I

2. How many prospective purchasers are there in my territory, and where are they located?

3. How much of an organization do I need to adequately service my territory and make a satisfactory profit? In short, how much can I make on the business I can do?

4. How large a showroom do I need. and should it be located at the airport or lowntown?

Attacking the questions in that order, consider first, "what plane or planes?" In arriving, here on these pages, at an answer to this one, we may easily appear diametrically opposed to some manufacturers' ideas, disagreeing with those who have already made up their minds. Let's, however, apply practical reasoning to the problem.

First, what groups will make up the market the first two years after the war? According to General Aircraft Corp.'s survey of "The Postwar Aircraft Market" they stack up as follows:

- 1. Replacement to previous owners
- 2. Civilian pilots buying for the first time 5%
- 3. Returning Army and Navy personnel 24%
- 4. The until-now-non-flying civilian

	SALES SOLICITATION OUTLINE-MAIL, PHONE, AND	N OUTLINE-M	AIL, PHONE,		PERSONAL CALL	
Classification by type of prospect	Where to get prospects	What to mail	When to	When to make phone cell	Personal	How records should be kept***
1. Old account	Charge account records or ask O. A. letter & name of cash customers brochure 1-2-3	O. A. letter & brochure 1-2-3	Monthly for 3 months	After 3rd month		Make up cards from inactive charge accts, or when name is obtained cross reference date and alphabetical files
2. Reference prospects	Get minimum of 3 names from cash customers sold	Prospect letters 1-2-3 & bro- chure	Semi-weekly for 3 mailings	One week after 3rd mailing		Make up cards as soon as name is obtained and file as above
3. Interested people visiting airport or show room	Ask name or take license no.	Prospect letters 1-2 & brochure	Semi-weekly for 2 marlings		5 days after 2nd mailing	Same as #2
4 Service dept., gas, shop, service inspection	Name and address from sales ticket or plane license**	Service letter— prospect letter #1	Semi-weekly, 2 mailings	1	5 days after 2nd mailing	Same as #2
5 High rental area residents	Street directory & rental map or auto registration lists	Prospect letters	Semi-weekly, 3 meilings	One week after 3rd mailing		Make up the number of cards that can be properly handled daily and file as other classifications
6. Executives of local busi- nesses	Chamber of Commerce or direct inquiry	Prospect letters	Semi-weekly, 2 mailings		One week after 2nd mailing	Same as #5
* License number can be mobile registration list a address or, if plane, C. ** Service and sales ticked note future needs of co	License number can be looked up in state automobile registration list which also contains name and address or, if plane, CAA registration list. Service and sales tickets, If provided with space to note future needs of customer, can be a great help	in follow-up for future business, and information from sales tickets should be transferred to file card. ••• Prospect cards in duplicate should be made out, with first mailing made on classification 2, 3, 8, 4 as soon as name and address has been obtained, one	ture business, and it wild be transferred to uplicate should be ade on classification address has been obta	nformation of the card, made out, 2, 3, 8, 4	card filed alphabeti file. A systematic each day — should The 1 (old accountille as soon as the	card filed alphabetica by, the other in a 1-31 date file. A systematic coverage — a given number each day — should be made on classification 5 & 6. The 1 (old accounts) should be set up in prospect file as soon as the account becomes inactive.

Prior to the war there were approximately 25,000 non-military planes in the United States. Only 30 percent—some 7,500—were "privately" owned, applying the term as we do with the automobile. The rest were owned by fixed base operators, airlines, corporations, and flying clubs. Obviously, this cannot be the basis for a big new market, and the planes these latter groups will buy will parallel their experienced need. This may, in many cases, mean more expensive, faster, and "hotter" airplanes than the lessexperienced will want.

Naturally the other experienced pilots and those with military training will fail into the classification of being able to handle a plane necessitating highly developed skill in the art of flying. But here we encounter a likelihood that price will be a more important factor.

Usually, the prewar owner paid out more for the plane and its upkeep than the average person would nominally pay for a means of transportation. This is further evidenced by the number of people who gave up flying because they found it too expensive. According to the CAA, students accounted for 56.6 percent; owners, 50 percent.

The returning military airman will have the task of re-adjusting himself to civilian life. That includes getting a job, a home, furniture, a car, and possibly starting to raise a family. All these things will take considerable money, and it is probable that the average man will rent a plane before he buys.

His mental and physical adjustment to flight, however, will make him a

good prospect, and it has been estimated that he will represent 24 percent of the potential market. Some 85 percent of the pilots have indicated they want to own planes, but most have said they will buy other things first. It is interesting and understandable that combat experience lowers considerably the pilot's enthusiasm for owning his own plane, making logical the estimate that only 10 percent will be prospects in the first two postwar years.

Thus far we have looked at the size of three of the four classifications in the potential market. They make up 38 percent of the total estimated market.

In picking a plane to satisfy them, ease of control and safety will not be a major factor. These features will, however, be the most important to 5 percent. For the remainder, the more important features will be speed, range. comfort, appearance, and equipment, and there will be no necessity for teaching them to fly. Thus the plane characteristics for the dealer to seek would be favorable speed (100-125 moh. honest cruising); a good utility range (500-700 mi₂); comfort (high quality appointments and equipment); ease of control; and unquestioned safety features (non-spinnable, positive glide path control, good visibility, and a really good steerable-on-the-ground tricycle landing gear).

Now let's look at the other 62 percent of the prospective market, the until-now-non-flying civilian. Limiting prospects to those with incomes of more than \$2,500 per year, we find, according to the National Resources

Planning Committee and OPA, that in 1942 there were 13,104,000 consumer units in this group. Applying a shrinkage figure, in anticipation of the war's end, of 25 percent (which conservatives believe probable), we still have approximately 10,000,000. Of this number, those indicating an intention of buying a plane before making any other major purchase total 1 percent.

For the early market it is this group of some 100,000 around whom plans should be built. To this group case of control; inherent safety; comfort; price; appointments; cruising range; and speed are ranked in importance in that order. Since ease of control ranks first, it is obvious that simplified controls, such as those found in the Skytarer, Ercoupe, and others on the boards, will prove an important factor. Both these planes have reduced CAA dual and solo time (5 hr, dual instead of 8; 25 hr. instead of 35 solo) which means less expense in teaching the prospect or purchaser to fly, with a corresponding reduction in sales resistance. And in the matter of safety, it has been found that 53 percent of the civilian preference has been based on that factor and ease of control. It is therefore logical to sell a plane meeting these requirements.

Since price is important, and the plane's size and number of seats has a bearing on price, it is reliably estimated in the industry that the two-place type will meet the demand for 70 percent of the market. "Must" features for the now-non-flying civilian, however, will include such conveniences as radio, light, heat, glare control, and self starters; for this man won't want to pull a prop through, and his wife will want to even less.

A four- or five-place plane will be a logical addition to the distributor's line. Although it is believed that less than 5 percent of the total market will be for these types, they will nevertheless be important in dollar volume and also in the prestige in servicing these "limousine" customers.

Next comes the problem: "How many prospects are there in my territory, and where are they located?"

From the local American Legion Post or, possibly, from draft boards, the number of service airmen from your territory can be determined. Then apply the 10 percent—the national average of that group found to be prospects. Next, from CAA can be determined the number of registered owners and licensed pilots in your territory, to which should be applied 20 percent—the national average expectancy.

Then, to the remaining non-flying (Turn to page 277)

Hang Your Shirt On a Star

Alert clothing manufacturers name their sports-wear Cavu and tie promotion to flying. What's more they put airplanes to work in long-range sales program.

sale of many kinds of merchandise is not a thing of the past. Planes can, as a matter of fact, be used not only for promotion purposes, but as an integral, working factor in the over-all sales program.

One organization, for example, has already put two radio-equipped Stinson 105's to work, and it plans to put other planes in service as conditions permit the development of additional business

It all began some time ago when M. M. Brohard, Jr., Cincinnati clothing designer and manufacturer, took up flying as a sport. He wanted a shirt that was not only distinctive but comfortable for long cross country flights,



Flying selesmon Carl Ogden models Cavu "Tailspin" shirt in front of radio-equipped company Stinson. As materials and plant capacity permit increased production, his duties will include flight training—where necessary—and also teaching new salesmen how to use plane in merchandising.



Chief Pilot Carl Ogden (left) and William G. Brohard unload samples of Cavu sports clothes an sales trip in one of companys two Stinson 105's, Brohard brothers have not only designed their clothes "with a flair for the air" as promotional program but have also put planes to work for sales and delivery.

so he designed one and had it made up.

It proved very popular with his fellow flyers, but making more for them was impossible due to pressure of the company's war contracts. As these contracts were completed, however, and limited quantities of material became available, special orders were filled. The business possibilities became more and more evident.

Brohard's interest in flying meant but one thing: The business would have a close connection with aviation—and from a modest start he and his brother William (also a flyer) have developed their line of Cavu clothes, "sports-wear with a flair for the air." The line thus far embraces high grade specially designed sport shirts and slacks for both men and women, with all styles named after airplane maneuvers such as the "Chandelle" and "Lazy Eight" shirts for men and cor-


responding "De icer" models for women Quite naturally all advertising and promotion literature is designed around flying activities; even the trade-mark embodies an airplane.

More important from the aircraft inlustry standpoint, however, is (avu's actual, practical use of airplanes and flyers.

First flyer to join the organization was Carl R. Ogden, veteran WTS instructor, who has been made chief pilot. His duties are not, however, limited merely to flying; rather he is becoming a flying salesman

As materials and plant capacity become available, other salesmen who will also have to be flyers—will be added. Ogden's duties then will include two kinds of teaching: Flight training where necessary, and instructing new salesmen how to use the airplane as a sales aid. One of the pres-

(Turn to page 261)

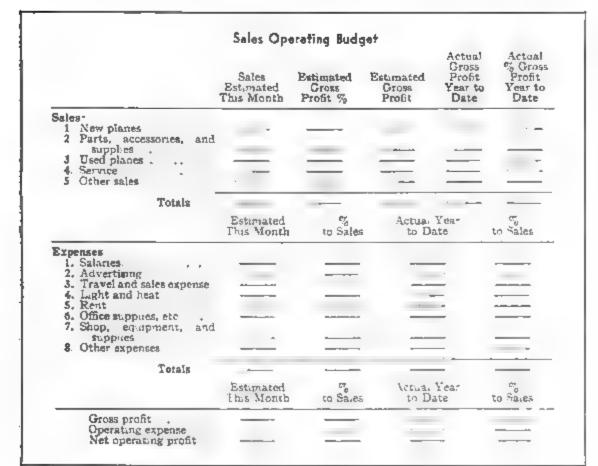



New Protection

FOR A VITAL SPOT

this new flexible flak helmet. A multitude of small metal squares provides extra protection for head and neck, and sponge rubber lining reduces shock and concussion.

Successful records of "missions accomplished" depend not only on the marksmanship of well-protected gunners, but on faultless engine performance assured by effective lubrication.

That is why, for thousands of engines in military planes as well as in the ships of civilian airlines, Texaco Aircraft Engine Oil is used for reliable and economical operation.

In fact

More revenue airline miles in the U.S. are flown with Texaco than with any other brand.

A Texaco representative will gladly cooperate in selecting the most suitable fuel and lubricants for your particular operations. We will also be glad to furnish information for the improvement of operation and maintenance practices. The Texas Company, Aviation Division, 135 East 42nd Street, New York 17, N. Y.



126

TEXACO Lubricants and Fuels
FOR THE AVIATION INDUSTRY

TUNE IN THE TEXACO STAR THEATRE WITH JAMES MELTON SUNDAY NIGHTS # METROPOLITAN OPERA BROADCASTS SATURDAY AFTERNOONS

AVIATION'S 8th Annual Maintenance Issue

TABLE OF CONTENTS FOR SPECIAL SECTION

Aviation's Maintenance Awards 128-129

To United Airlines	128
pecial Maintenance Feature Articles	130-152
Supercharged Harness Cures Ignition Tro	oubles Edward E. Thorp 130
Promochis for Poshwar Service	
More Seats Up More Costs Down	
Standardized Maintenance Means More	Fixed Base Business C. C. Moseley 136
	Hudson T. Morton 138
TWA Gets Double Benefits From Short-Bu	iff Mockups
Fix-It School on Wheels	Wm. J. Hargest 152
	•
*	* *
viation's Maintenance Notebook	155-169
pecial Sling Handles Both Engines and Nacelle. 155	Special Scoresby Tests Gyro Horizon or Bank
C-3 Strut Checker Simplifies Procedure 156	
pecial Bench Speeds Cowl Flap Repair 156	
One Man Handles This Simplified Brake Bleeder. 157	Engine-Cowling Bench Aids in Riveting 164
Sas Truck Hose Winder Features Braced Crank 158	3 Grommet Stretcher Speeds Production 164
Hinged Holder Prevents Cord-Plug Troubles 158	Soviets Use Truck Rig As Starting Booster 165
Suard Protects Operator From Falling Loads 159	Rubber-Stretching Jimmy Saves Hands 165
Nuts Employed in Stud Removal 160	Shock-Strut Oiler Bleeds and Fills at Once 166
New Plastic Runway Light Extends Above Snow	Hammer Attachment for Right-Angle Riveting 166
Level 160	G. L. Sergeant Builds Time-Saving Tire Remover 167
Artificial Horizon Tester Checks Time and Pres-	Simple Dial Unit Checks Bearings 167
sure	DC-3 Heater Mockup Simplifies Instruction 168
ortable Pre-Oiler Rig "Doubles" for Pressure	Coiler Device Makes Odd-Size Springs 168
Work 161	Special Sorter Saves 17,000 Rivets Hourly 168
Dil Filter Screen Roller Expedites Repair Work 161	Oil Radiator Washer Banishes Foreign Matter 169
Conduit Winder Brings Economies 162	Rivet Remover Is Handy Tool
Couter Caliper Prevents Mistakes	How Taps Are Saved by Plastic Extension 169

AVIATION'S MAINTENANCE

AWARDS FOR 1944 *





Supercharged Harness CURBS IGNITION TROUBLES

By EDWARD E. THORP, Assistant Editor, "Aviotion"

Altitude- and fog-proof ignition harness, created by the maintenance department of Chicago & Southern, is so successful that other airlines have put C & S in the manufacturing business.

HANGING ATMOSPHERIC and pressure conditions, combined, make the ignition maintenance man's work a continuous battle against infiltration of moisture into the harness system, with the attendant evils of rough engine operation and rapid depreciation of material.

Owing to the practical impossibility of maintaining the harness and shielding in a permanently tight condition,

some method had to be devised which would prevent atmospheric moisture and sparkplug leakage from interfering with smooth operation of the ignition

Engine manufacturers recommended drilling drainage holes in the lower parts of the shield manifolds and filling the connector wells of the sparkplugs with sealing compound. Wire makers advocated stripping the lacquer from


that portion of the wire which extended from the sparkplug elbow seal grommet down into the connector well. Plug experts reduced service time to 25 hr. and the plugs were regapped at more frequent intervals to lower the necessary voltage and reduce the loading on the insulation.

But even after all these things had been tried the best that could be said was that ignition was "fair".

Attempting to better these conditions, engineers of Chicago & Southern Air Lines adopted stainless steel braid for the metal hose formerly used, and the grommets between the main manifold and the leads were eliminated, to

Air pump designed by C & S for ignition supercharging. Yiew at left shows ball bearing on crank, which pushes pump rad downwards by pressure on spring plunger beneath shaft. Heavy spring of top reises diaphragm, forcing oir into system until are pressure equals that of spring. Air is drawn into pump through

gloss container which is filled with silica gel. Chamber below diaphragm may be connected to supercharger pressure to provide variable pressure at that point, thus permitting air pressure in system to be varied while running.

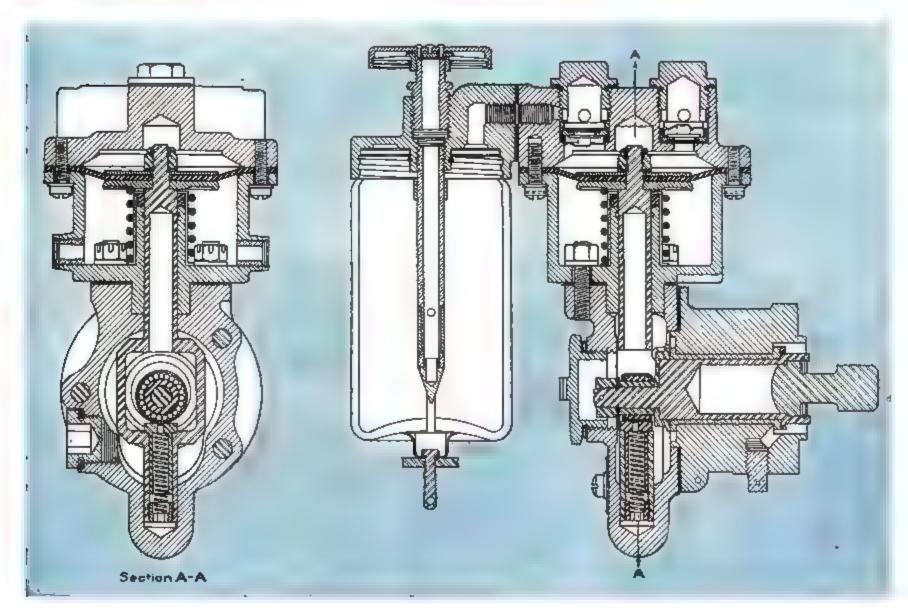

provide better internal circulation. A special double-coned Neoprene grommet 7 in, long was fitted at the sparkplug elliow to provide a positive moisture seal. These were installed on various makes of sparkplug, with Bakelite or ceramic connector terminals and were service-tested over a period of 18 mo. Result: Ignition was reported as "fair to good" which, in airline work, is still not good enough

Engines ran well under dry conditions but became rough in operation during extreme precipitation, resunting normal running after they had left the precipitation area. Investigation showed that most of the moisture was caused by condensation of exhaust gas leakage through the sparkplugs. Therefore, by way of experimentation, the plug connector was sealed so that the gases would accumulate and build up a pressure which would prevent further

However, another trouble immediately showed up. Gas leaked along the center of the wires between the strands, sometimes traveling as far as the magneto itself. After this, the attempt to seal the plug connector was given up as impractical

A survey of other airlines showed C & S engineers that they were not alone in their troubles-for practically everyone was plagued in the same way, except Northwest Airlines, which used a supercharged harness developed by Carl E. Swanson, chief electrical engineer (see page 209, Jan. '44 Avia-TION). This installation, having given over 5,000,000 engine miles without trouble, was checked with the intention of adapting it to C & S equipment.

Owing to the fact that no accessory drive was available for the air pump, as was the case with NWA, C & S designers found it necessary to produce a pump of their own, one which could be driven from the machine gun synchronizer on their Cyclone engines.

As illustrated in our initial drawing, the pump consists of a diaphragm, above which is the pump chamber, fitted with plastic disk intake and outlet valves (the intake valve is at the left in the drawing). It takes air from the glass container filled with silica gel, which removes the moisture before the air reaches the pump. Air enters the dryer through a dust trap at the top, travels down the center tube, and passes upwards through the silica gel. This substance is white when dry and becomes blue if wet, thus affording a simple visual check of its condition. It may be dried by heating and used many times over. The container is an ordinary glass jar screwed into the top casting and held in position by a wire bridle passing beneath it.

Upward movement of the diaphragm is given by a large spring (shown directly beneath it). In addition to providing motion, this spring regulates the pressure of the air in the harness, variation of the strength of the spring causing a change of pressure in the delivered air.


Downward or suction stroke is by crank action, cushioned by the coil spring (shown at the lower end of the pump rod). Though pounding might be expected from this design, it has been found thoroughly satisfactory in practice and very silent in operation Apparently any slight clearance is taken care of by the cushioning effect of the oil.

It has been found advisable to fit an individual air pump and air dryer to each engine, in order to simplify the design and eliminate cross connec-

Results have been most satisfactory. Sparkplug servicing periods have been extended to 375 hr., while rough engine reports have practically disappeared. Whereas formerly up to six engines per month were reported running rough from ignition harness condensation, only three such cases have been turned in during the past year, each being due to loss of air pressure in the harness through mechanical failure. One case was caused by a broken diaphragm, another by a cracked air line, and the third involved a fractured sparkplug tube.

With revisions to the harness, the total weight addition to each engine is 6.5 lb., which includes cockpit instrumentation

Sparkolug service time between gapping periods has been increased even though the erosion rate has not been decreased, because engines now



Sparkplug connector depicted here in drafting views, was changed by addition of four notches (A), 1/32-in. deep in face of connector flange to permit metered leakage at connection, thus eliminoting exhaust gas leaking into wiring. Notches (8) are 1/16-in, deep to allow dry air to reach sparkplug well.




Chart illustrating output of pump at different speeds.

operate up to .028 gap where they formerly were held down to .022 in order to keep sparking voltages down to a minimum. Cases have been known where sparkplugs have operated perfectly with gaps up to .032, due to elimination of humidity and increased flash over resistance from higher air pressure in the harness.


Overhaul of standard ignition barness requires slightly less work than the supercharged type, but this is chiefly because pump overhaul is added to the normal amount of work required. Offsetting this is the economy in wire, over 80 percent of the wire in supercharged harnesses now being on its third engine overhaul run and still in good condition, whereas in standard harnesses complete wire change is the rule at every engine overhaul and sometimes much more frequently.

Operating service costs are greatly reduced by the considerably smaller number of sparkplugs sent through for reconditioning, in addition to the considerably fewer hours of service lost through the airplane being delayed or laid over.

Moisture troubles have been entirely eliminated, since the internal pressure causes all leaks to be outwards, thus preventing entry of any external air, oil, or moisture,

The purposely created and metered leakage at the sparkplug connection passes a volume of air so much greater than any possible plug leakage that any gases passing upwards through the plug are diluted and then removed before condensation is possible. For the same reason, discoloration of the sparkplug barrel-caused by leakage of acidulated air-has disappeared entirely since adoption of the supercharged harness.

At high altitudes, where moisture is (Turn to page 287)

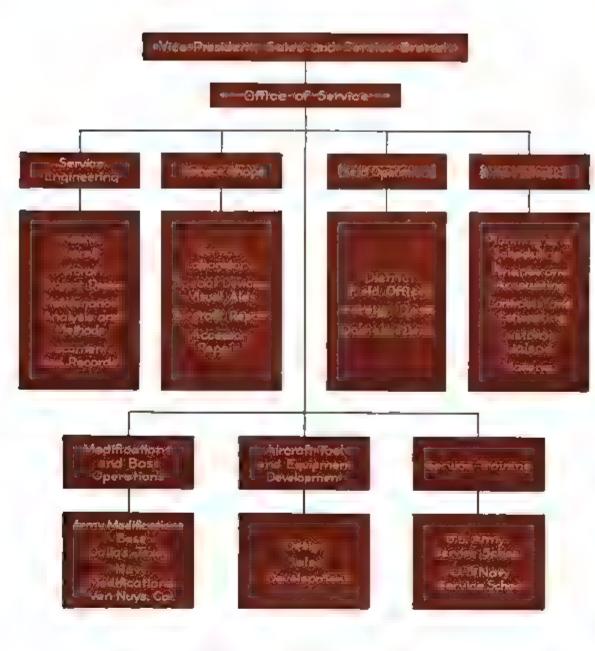

PROSPECTUS FOR

Postwar Service

By REAGAN C. STUNKEL, General Service Manager, Lockheed Aircraft Corp.

Here's a blueprint for a flexible system whereby manufacturers can insure maintenance to guarantee highest aircraft utilization to their customers—military, airline, and private owners.

transition from war time service operations to postwar service operations in a large manufacturing organization is to tread on the threshold of conjecture. The nature and the amount of service to be required from a manufacturer by the purchaser of an airplane must be dependent upon a great number of factors, few of which have emerged from the postwar aviation planners in the form of definite programs.

Some of these factors: 1, The international aviation policies of the nation; 2. the determination of "feeder line" operations; 3. new CAB policies

■ O ATTEMPT TO FORECAST the with regard to operations and maintenance; 4. aircraft released for reconversion; 5, development of new airlines and freight operations; and 6, requirements of the military.

These points encompassed most of the problems of the industry, but service is so inextricably involved in the final determination of each of these factors, plus many more, that the actual institution of service policies must follow the formulation of basic aviation policy for the nation.

It is not difficult, however, to visualize the optimum organization required for a manufacturer's complete postwar service operation on a

Fig. 1 Lockheed delegates full service authority to Office of Service, as shown by organization chart Note that, in addition to normal service organization functions, Lockheed's set-up covers tool and equipment design. modification, and engineering for aircraft on which production schedules have been

strictly theoretical basis. From these analyses may then be extracted those functions actually required when the occasion arises.

Before delving too deeply into the future, it is perhaps best to furnish a basis of comparison by considering a present-day service organization and its operations,

Lockheed Aircraft Corp. delegates full responsibility for the service of the aircraft it builds to its Office of Service. The present functional organization of this office at Lockheed is shown in the chart in Fig. 1. This service organization reports to the sales branch under Carl B. Squier, vice president of sales and service.

It is interesting to note that, in addition to the functions normally assumed by a service organization, the additional responsibilities of tool and equipment design, aircraft modification, and the engineering of "inactive" aircraft, or aircraft out of production, are delegated to the office of service.

Present operations of Lockheed's service organization include: The customer service division; AAF modification center at Dallas, Texas; Navy modification, repair and overhaul base at Van Nuys, Calif.; U. S. Army service school, and U. S. Navy service school. Other services are extended through Lockheed Aircraft Overseas Corp. which is operating bases in the United Kingdom.

The present service organization functions primarily for the benefit of the armed services, and it will continue to do so until the war is won

Process of converting from wartime to peacetime service operations must necessarily take place over a relatively long period of time. There are new military models in process of development which will require the continued assistance of the manufacturer when hostilities cease, but until that time, the manufacturer must continue to supply service in the degree required by the armed forces. It is logical to suppose that the transfer of service activities from wartime duties to the commercial phases of aviation may begin with the defeat of Germany and may be complete shortly after the defeat of Japan.

Modification of service operations-

from the set-up in Fig. 1 to the theoretical set-up in Fig. 2-would therefore not be abrupt but would be adjusted entirely in accordance with the progress of the war. When this transition is complete, the problem then resolves itself into supplying two types of service-that required by the military in peace time, and that required by commercial operators. Fig. 2 shows the functions required to accomplish this objective,

A brief analysis of each of the functions shown on the chart will serve to explain the reasoning underlying the development of the chart.

Service Shops

The company's service organization is unique in that it has always operated a complete repair and overhaul service at the factory for the customers. This activity was extended at the beginning of the war to include the establishment and operation of complete repair and overhaul facilities for the USAAF for work overseas on all types of American-built aircraft and aircraft equipment.

One result of these operations has been the collection of a group of personnel familiar with all phases of aircraft service and repair, thus alleviating any possible limitation to the reconditioning of airframes only at the factory. This personnel now occupies places of responsibility in Lockheedoperated bases and will form the nucleus of a new completely integrated, expertly staffed, postwar repair and overhaul activity for the benefit of the customers.

Services to be offered by these shops will be: 1. Repair and overhaul of private aircraft; 2, contract overhaul of airline aircraft: 3. reconversion of aircraft to commercial types; 4. conduct of laboratory activities to determine better service methods; and 5. manufacture of visual aids, training devices and specialized service equipment.

Since the range of aircraft to be handled in these facilities varies from the small personal aircraft to the largest four-engine airliner, planning of shop operations becomes a more complex problem than that encountered either in the airline shop which services one type or the private service station servicing only small aircraft. Again, the overseas operation of the corporation serves in good stead, since the experience gained in servicing 33 types of all manufacturers was developed around a problem identical to that now confronting us. It will not be Lockheed's future policy, however, to

handle aircraft other than those manufactured by it when these plans are applied.

Service Engineering

One of the major problems confronting the manufacturer in the immediate postwar era is the reconversion of military aircraft to privately owned, corporation, or airline types.

Engineering personnel presently used in modification activities have become adept through experience in this type of work, and their transition to design of commercial interiors will not be difficult. In the case of the aircraft originally designed as transport types, such as the C-57 and C-60 Lodestar, engineering already developed will suffice for the reconversion. This will not be true of the military types, such as the A-28 and A-29 Hudsons and B-34 Ventura. Achievement of any degree of economic usefulness from these aircraft as commercial models will require a considerable expenditure of engineering time and effort. The responsibility for this ac-vestigation of troubles; and advice to

tivity is a service engineering problem.

With the beginning of new manufacturing programs concerned with advanced types of military and com mercial aircraft, models now out of production no longer receive attention from the engineering branch since the entire efforts of that organization must be directed toward new design. Hence the responsibility for continuation of customer liaison, service bulletin work, and maintenance of data on a model out of production is transferred to service engineering upon completion of a contract for the aircraft.

The 194? chart in Fig. 2 shows a division of the aircraft project desks into military and commercial desks. The responsibility of this phase of service engineering is as follows: Analysis and reply to all customer complaints; analysis and transmission to engineering of all service trouble reports from all sources; supply of technical information on service to the customer; maintenance of trouble frequency reports; field engineering in-

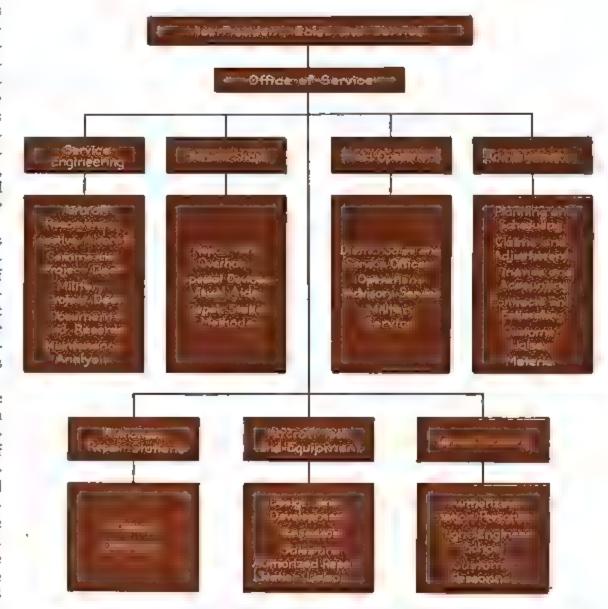


Fig. 2. Service organization chart for 1947 following transition from war to peacetime operations when two types of service—military and commercial—will be required. Transition need not be abrupt, but would be adjusted according to progress and demands of war.



Lockheed service program includes tool and equipment design and production, such as represented by typical ground handling equipment shown here. As number of types of aircraft increase and use spreads, this function assumes greater importance in program designed for greater aircraft utilization.

engineering regarding correction of troubles.

All incoming and outgoing reports and correspondence from the customer flow through the project desk for the particular model affected. This system of operation obviously will function for military as well as commercial models.

Responsibility for the distribution of service manuals, bulletins, and technical operating data, also preparation of the weekly service circular on all types of company aircraft, is assigned to the documents-and-records group of the service engineering organization. It is extremely important in commercial operations to retain complete and accurate record of conformance to service bulletins, aircraft specifications, changes in equipment, and also to retain all such records in up-to-date form

Requests have recently been received by the company's service department for information on aircraft manufactured in 1933. With the numbers of models and quantity of aircraft in commercial operation constantly increasing, this function assumes a position of growing importance in the general operation of a service organization. Maintenance of accurate service records is a necessary adjunct to most of the other branches of service.

Still another function of service engineering is the work of the maintenance analysis group, which has the responsibility of determining the best procedures shop layouts inventories of

parts, and methods to conduct any aircraft operation. As an example of its work, this group recently assisted the Army in establishing a productionline system for maintenance of P-38 aircraft. The postwar function of this group will be, first, to analyze and determine the best methods of maintenance to be used in operating new designs. These methods are then tested in the company's own service shop and the "bugs" are worked out. The group then imparts this information to the customers' personnel through the service training department or by actual on-the-spot instruction and assistance at the customer's operating base.

The variety of studies conducted by the maintenance analysis group includes inspection systems, authorized repair station operations, maintenance dispatching, shop layout, service equipment selection, and continuous study of current maintenance systems in terms of their application to Lockheed aircraft.

Aircraft Tools and Equipment

Lockheed has always designed the necessary tools and handling equipment for the service of its aircraft. The design has not been limited to the bare essentials required for line service but has extended in two ways First, to afford the customer greater utilization of his airplane; and second, to standardize his equipment for use on other aircraft, Design of test equipment for all accessories used on Lock-

heed commercial and military aircraft is developed as the design of the airplan progresses, and the equipment is thus available when the first production model is delivered to the customer.

The advent of large four-engine transport aircraft has given impetus to the tool and equipment design program. Loading equipment for passengers and cargo, special test rigs, aircraft handling equipment, and special tools, are designed, insofar as possible, to insure standardization, affording the use of the equipment on all types of aircraft of the same size.

Closely allied with the airline equipment program will be the development of authorized repair station equipment for personal aircraft service and airport equipment for "ready built" airports

Lockheed now offers a complete line of aviation equipment for aircraft from 15,000 to 100,000 lb. gross—equipment which will service any of these airplanes.

Authorized Repair Stations

As the war draws to a close, more and more aircraft are being returned for the use of private owners. It is realized that these owners have a right to expect factory service without the necessity of returning their aircraft to the factory. To accomplish this objective, competent agencies will be appointed to handle Lockheed parts and to repair company made airplanes in accordance with methods developed at the factory.

These authorized Lockheed service stations will have personnel trained by the factory in the technique of accomplishing service and repair according to the best, most economical methods. These stations will stock a supply of approved Lockheed parts and will merchandise company tools and equipment. They will be supplied with upto-date technical data on each model and they will be kept currently advised of new methods and materials to be used in servicing the aircraft.

The number and location of the stations will be dependent on the geographical concentration of aircraft but, in general, the stations will be within convenient flying distance of any domestic airfield.

When international aviation policy has been sufficiently defined, similar authorizations will be extended to foreign operators.

Field Operations

Lockheed will continue to maintain a staff of highly trained, competent engineers and service men in the field to assist customers. The duties of (Turn to page 288)

ATERIAL REDUCTIONS in maintenance costs have often been made without purchasing new equipment. Instead, the trick has been done by rearranging and the machinery and/or changing the routing to enable work to be performed with less lost motion.

Such savings are exemplified by the careful planning in the upholstery shop at the Cheyenne repair depot of United Air Lines, where some cost savings up to 40 percent have been realized.

Confronted with both Army maintenance and reconditioning of returned aircraft, in addition to routine repairs, the plant superintendent had the choice of two courses: Either to buy more equipment, or to make that already on hand operate more efficiently. Since new machinery was not to be had, that in use was, of course, required to produce more than formerly.

Then the headaches began. Skilled workers have their own most efficient rate of turning out quality work, and attempts to speed them up involve risks in sacrifice of quality for quantity. In airline maintenance there is no such word as "second rate," so some other means had to be devised to step up output.

A careful survey showed that, in the re-upholstering of old seats and the finishing of new ones, much time was lost through wasted movement—not obvious waste of time, but a few steps here and a few there, totaling up to a large percentage of the working periods. To save these steps was a difficult problem, especially considering the layout of the shop which was then being used. So a new one was planned

More Seats Up...

MORE COSTS DOWN

How a new uphoistery shop layout, plus an improved time-motion work routine, streamlined maintenance at UAL's Cheyenne repair depot—putting seats back in the air faster.

The present shop's layout and routine is shown in the accompanying diagram. It will be seen that from the time that the raw stock is classified until the finished work is gathered, the total distance traveled is only slightly more than the length of the shop itself.

Material is racked in rolls outside the stockroom and is cut off as required. The rolls are placed above one another so that any kind of material may be unrolled and cut without the necessity of moving any other roll.

Less than 4 ft. away, the cut stock is placed on the large cutting bench, to which patterns are brought a distance of 6 ft. from the pattern stockroom. Material is then cut to shape and the pattern returned to its place in the pattern storage room. The cut-out work goes to the sewing machines at the end of the building. Travel time so far, including replacing of patterns, totals only about 60 sec.

There is a battery of nine sewing machines, several being equipped for


special types of work, such as binding of seams in heavy materials or doing multiple needle stitching

From the sewing machines, the material is either taken directly to the finished-work room, after weighing, or moves to the finish and upholstery benches. During this part of the process, padding, springs, etc., are supplied from the material stockroom, over the weigh scales, in a direct path which does not interfere with movement of work in other stages of completion. Time from stock to upholstery bench—for material not going to sewing machines—is 40 sec., including weighing.

After finishing, work goes to the end of shop, and time required, including booking, is less than 1 min.


Inspection, made at cutting table, sewing machines, and finish bench, totals not over 2 min., and in the case of simple work, it frequently is only a matter of seconds. Weighing, absolutely necessary in airline work, requires merely a pause of a few seconds

(Turn to page 288)

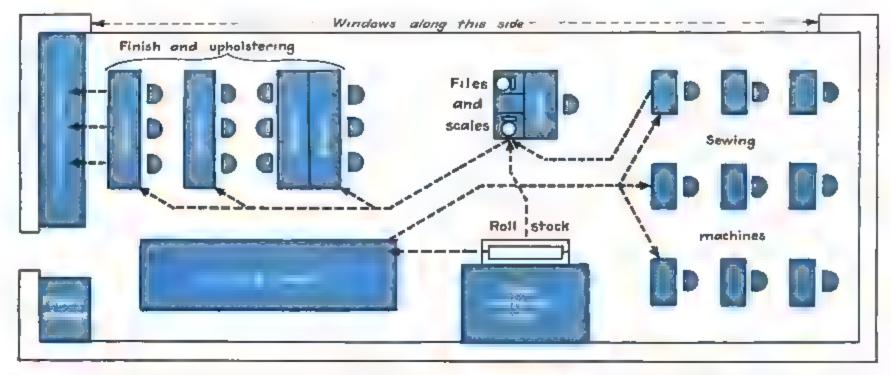

Routing diagram indicates how lost motion, such as in cross travel, has been eliminated by scientific planning. Arraws show movement

of material from raw storage to finished work. Patterns are kept close to cutting bench to avoid walking across busy work floor.

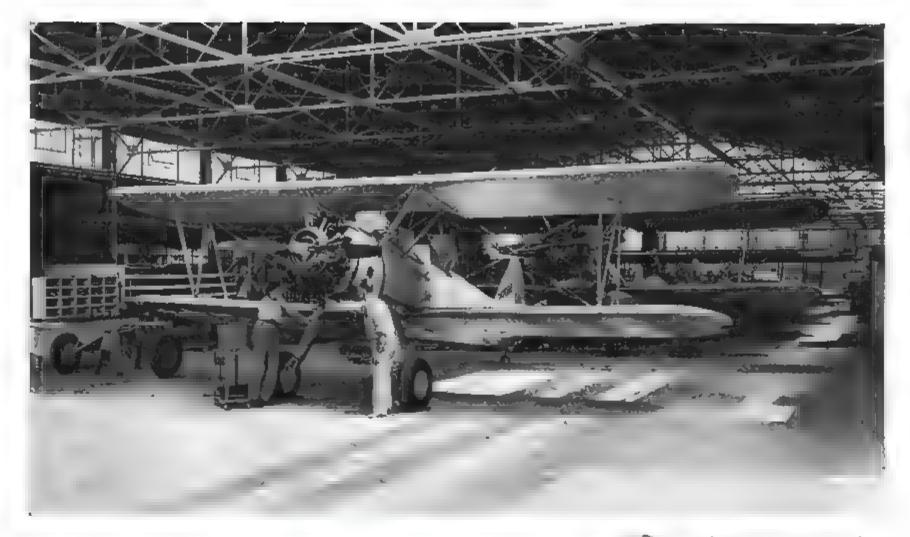

Standardized Maintenaure

Production line overhaul and repair depot at Grand Central Airport-ready for postwar personal pilot's business as well as commercial work. War-developed standardization of procedures by specialists will be utilized in peacetime operations to speed service and reduce costs.

MEANS MORE FIXED-BASE BUSINESS

By C. C. MOSELY,

President, Grand Central Airport Co., Cal-Aero Technical Institute, and Mira Loma Flight Academy

Methods and procedures developed by AAF flight training contractors to speed overhaul and repair can be used for successful peacetime operations.

ACK IN THE BARLY DAYS of automobiles, owners found that repair and overhaul meant an individually negotiated job on which the results were, at best, problematical No two garages were alike, no two methods were similar, no two price estimates could be reconciled.

Then came a period of standardization-and as a result today's car owner knows what will be done and how much it will cost.

Fixed base operation will, as a result of the war, offer the same class of service and repair which helped so much to make motoring a part of the American way of life.

We hasten to say that no criticism of previous aviation methods is implied; the improvements developed are merely the natural result of mass production methods evolved, of necessity, by mass demand of the war.

At each of the three fields operated

by our companies for AAF cadet training, for example, we faced each night the problem of inspecting and maintaining as many as 300 training planes. Constantly we encountered the problem of necessary periodic overhaul. Production line methods systematized to the highest possible degree had to replace the old one-plane methods where the same mechanic, for instance, repaired rudder controls, made carburetor adjustments, and fixed the elec-

This war-borne standardization was actually evolutionary, but it came with almost revolutionary speed. With 64 contract schools throughout the nation striving to improve methods, and with the Army acting as liaison agent through which improvements by one were quickly made standard for all, practices were set up whereby planes

are serviced precisely the same in Ontario, Calif., as in Lakeland, Fla.

An outstanding example of standardization is what the Air Forces Training Command call "PLM"-Production Line Maintenance. It began experimentally in 1940 and is still being improved. Today, every operation in the servicing of an airplane is prescribed in detail and is standard for all shops throughout the country.

Basic feature of PLM is the shifting of maintenance from over-all mechanics to specialists, operating in crews. Under this system, the 100-hr. inspection, for example, can be completed in 4 hr. The crew consists of four mentwo on the engine and one each on the airframe and hydraulics. All can work on the plane simultaneously. In another production line, the daily inspection is being completed by specialist crews in 15 min. per airplane. Each man operates under a detailed, prescribed plan, which is the same in Maine as it is in Texas.

Adapted to postwar maintenance, this means that not only will these standardized methods materially speed all features of overhaul, but they will also reduce costs and improve results. It will mean that the personal flyer can leave his plane at any of the approved shops with full confidence that the work will be done according to CAA standards, with proper equipment, and according to manufacturer's specifications. And, just as important, there will be no out-of-line charges.

Although it is not yet possible to establish standardized charges because organization taking the lead in estab-

 Among improvements being made at company's recently purchased Grand Central Airport iss \$70,000 engine test unit (one cell is seen here). Although still engaged in military work, this operator is confident that expenditures such as this will, in peace, help give big league type sales and service—prime requisites at successful fixed base operation.

many operators are still on military lishment of the standardized costs. work, the groundwork has been laid. The war has brought the major operators together in a common cause as never before—as is shown by membership of the Aeronautical Training Society, which is composed of the 64 schools contracted for AAF primary training. It is logical to suppose that similar cooperation can be continued in the postwar period, with some such


The approved shops of the postwar era will bear as little resemblance to the facilities of early flying days as do our modern airports to those of the hay-

This is no haleyon dream. These shops already exist, and not as isolated exceptions. Our shops at Glendale, for instance, can handle for complete overhaul approximately 100

(Turn to page 284)

Engine teardown department (left) and production-line build-

cities for major overhaul of 150 engines per month. Shops can be quickly converted to up line (right) at Grand Central have capa- postwar operation, while retaining capacity

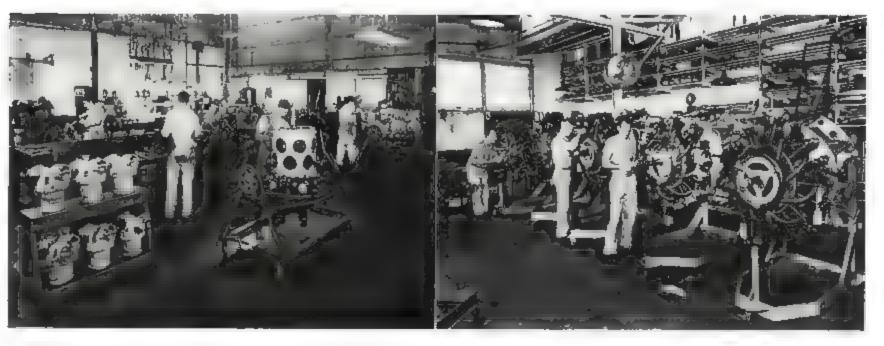


AVIATION, December, 1944

Attaining Bearing Cleanliness*

By HUDSON T. MORTON, Chief Metallurgist, Hoover Ball & Bearing Co.

Bearings—the very heart of high-efficiency mechanisms—are designed to give long wear under high loads and speeds. To insure top performance and obtain even longer life, these anti-friction units rate careful "laundering". Here's the ABC on how to do it.

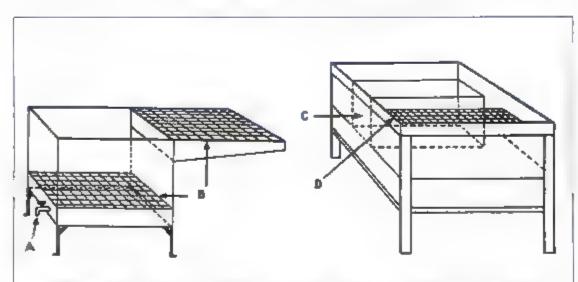

Simple tanks for petroleum solvent, emulsion, or alkali solution soaking. e cleaning or rinsing Tank, left has drain spigat (A), removable drain screens (8), tank, right has solvent in (C) and (D) is drain rack.

OR CLARITY OF PRESENTATION, this discussion concerning the cleaning of bearings has been divided into three parts. The first part will deal with types of contaminants and theory of cleaning to give an over-all view of problems involved. Actual cleaning solutions and solvents will then be discussed. Finally, a tentative layout for cleaning will be proposed, which can be modified for each shop to suit the quantity of bearings to be cleaned.

A special problem is involved in the cleaning of bearings because they ordinarily are received as complete assemblies with various amounts and types of contaminants to be removed. These contaminants might be grouped as:


- 1. Dust, dirt, and sand from the atmosphere.
- 2. Dirty rust-preventive compound from storage areas.
- 3. Oxidized and dirty lubricant from service.
- 4. Metal chips, abrasives, etc., from machining, grinding, and lapping operations on machines where the bearings were used
- 5. Residues from marking ink, etching solutions, and other numbering
- 6. Fingerprints.
- Corresion

Before cleaning operations are attempted, it is essential that a definite system be adopted for proper handling or bearings. No inspection should be attempted on a dirty bearing, and it should not be rotated Rotation of bearings containing grit niight cause permanent damage by indenting the load carrying surfaces. No bearing should be touched with bare hands.

Cleaning Theories

The ideal method of cleaning would be to dip the bearing in a solvent to

"Based on a paper presented before the Forum of the ATSC and Ant Friction Bearing Industry

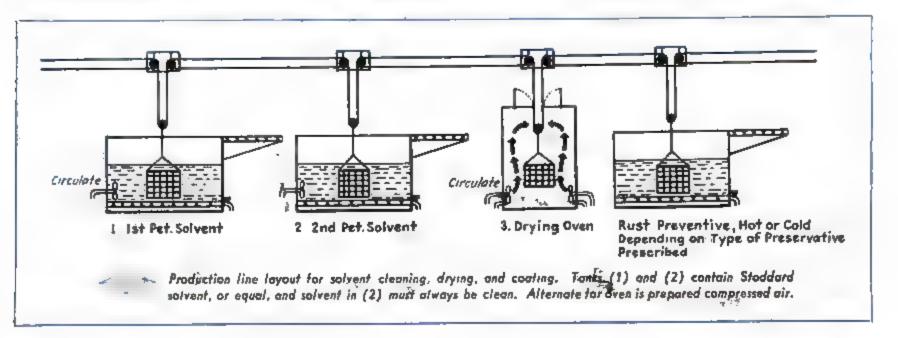

dissolve all contaminants, leaving the surface clean and bright. Have you ever succeeded in finding such a perfect solvent for cleaning your hands, or your clothes, or any other object? No.! Only a few oils, fats, or waxes are dissolved, and the other contaminants remain.

The most common cleaning solution consists of soap and water or alkalı and water. The alkali reacts with free fats in the contaminant to give saponification (form soaps). Then, by slight mechanical action, the bubbles of the soap solution remove the contaminant to form an emulsion of water, soap, and dirt. Mixtures of solvents and water solutions of alkali or soap are called emulsions. They clean by dissolving and saponification. Thus, water solutions are more efficient cleaners then solvents aione.

Most bearings contain grease as a lubricant. Greases are mixtures of oils and various soaps. Soluble soaps (soda soap) are generally used in good ball bearing greases and are readily dissolved in hot water without addition of other chemicals. However, metal chips and other insoluble particles will remain on the bearings. Insoluble soaps are used in cup grease (lime soap), low-temperature grease (lithium soap), and water-resistant grease (aluminum soap). Hot or cold water will not dissolve these insoluble soaps. Petroleum solvents and vapordegreasing solvents remove oils from greases but leave the soaps in the bearings. Thus, greases must be forcibly removed from bearings.

Mechanical force is probably the final answer to proper cleaning of bearings. The simplest force is a spray as used in a garden hose. The solution actually pushes the contaminant off the surface. Greater volume of spray, or higher pressure, will speed cleaning Some surfaces may require wining with rags, or mechanical brushing, with special fixtures for each bearing. However, wiping and brushing also add new danger of scratching bearing surfaces with dirt left on the bristles or wiping cloth from previous cleanings.

Demognetization


Bearings which have been in service are subject to electrical forces estabbecome magnetized.

utilized. Demagnetizers should be set that all bearings be demagnetized.

ing maintenance department. Foreign matter from various engine parts and lished in rotation of machinery hence other equipment breaks up during normal operation, and due to the pres-It is necessary to demagnetize bear- ence of magnetic forces set up in the ings after the first cleaning. Demag- bearing, these particles adhere to bearnetizers may be purchased or fabri- ing surfaces. This condition is very cated locally, or such machines as are destructive to highly polished raceavailable at various depots may be ways, and it is essential, therefore,

In demagnetizing these parts it will be necessary to pass them through the machine at least once in a forward direction and once in reverse direction and, at the same time, to slightly turn the bearing assemblies in the demagnetizer. This will assure a near-perfect demagnetization.

Experience indicates that complete bearing cleaning can only be accomplished by a combination of soaking in

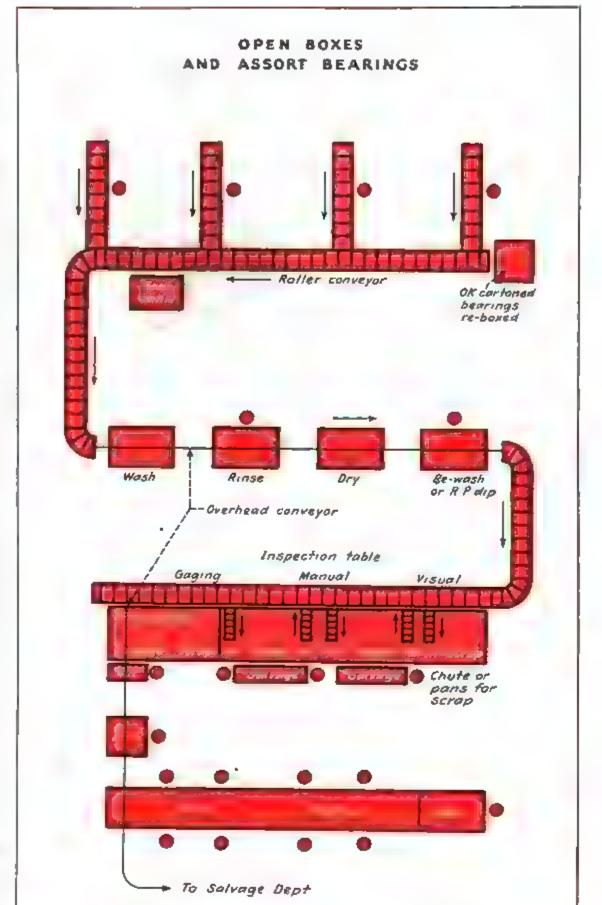

are unpacked at one end of room, cleaned, inspected, and packaged as they proceed to apposite end. Salvage is cared for in separate room up in the production line of the bear-

Shown here is suggested layout for bearing-cleaning department. Bearings

one solution and mechanically cleaning after the contaminant has been softened.

Alkaline Cleaning Solutions

Alkaline solutions can be used for simple immersion cleaning or twostage spray-cleaning. Typical composition of such a solution (in percentages) is 85 sodium orthosilicate, 10 sodium carbonate (anhydrous), and, 5 sodium resmate. Another is 46 sodium carbonate (anhydrous), 32 trisodium phosphate, 16 sodium hydroxide, and, 6 rosin.

In using such solutions, there are certain factors to consider and dictates to follow:

- 1. This method of cleaning is intended only for individual pieces such as rings, balls, or retainers. It should not be used on assembled bearings because it is almost impossible to properly dry the parts (get them entirely free from moisture).
- 2. During processing, handle parts on hooks, racks, or in baskets suitable for satisfactory cleaner-application and for adequate drainage,
- 3. Clean parts by immersion and soaking in an alkaline cleaner for 1-10 min., as determined by degree of contamination.
- 4. Parts should not be handled with bare hands or dirty gloves during and

between balls and retainer or from other parts of bearing.

after cleaning and preservation. A clean cloth or synthetic rubber gloves. or their equivalent, should be used: and handling should be kept to a mini-


5. Maximum cleaner-efficiency will

be obtained with solutions maintained within limits of 5 10 oz. of cleaner per gal, of water. Somewhat lower concentrations may be used if contamination is very light.

- 6. Concentration checks should be made at least daily.
- 7. The temperature range for good cleaning is 205-210 deg. F.
- 8. When sludge or oil and grease content becomes sufficiently high to cause unsatisfactory cleaning, replace the cleaner.
- 9. Water rinses which follow alkaline-immersion cleaning and just precede drying, should be kept at a temperature above 180 deg. F., and preferably near boiling. Temperatures much below 180 deg. F. can cause corrosion of parts upon drying.
- 10. The hot rinse water should be constantly overflowing at the surface to clear it of contaminating scum and high cleaner content.
- 11. The required rate of overflow will vary with quantity of work rinsed, and it should be so adjusted that the water is kept alkaline, yet does not contain enough cleaner to leave objectionable amounts of residue on parts upon drying.
- 12. Best alkali limits for rinse water are from .02-.05 percent, calculated as sodium hydroxide. In no case should (Turn to page 289)

AVIATION, December, 1944



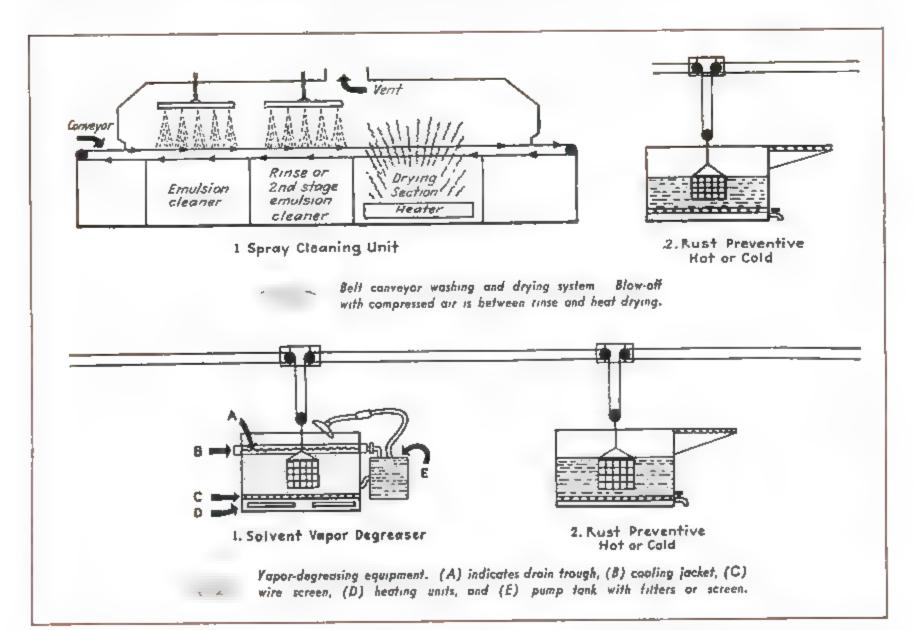

TWA GETS DOUBLE BENEFITS FROM


Shop-Built Mockups

Benjamin I. Kelly, tareman of accessory overhaul department, demonstrates remote control action of schematic display which reveals flow of fluid throughout hydraulic system Built largely of transporent plastics, working model shows flow from reservoir through accumulator and four-way valves to landing gear and flaps and back through release valves. Action of release valves, landing gear lack unloading volves electric and hand pumps, and cylinders is disclosed in defail through transparent plastic covers.

Originally designed to enlighten visitors and thus save workers' time, these revealing cutaways have proved invaluable as training gids and as morale boosters.

OUBLE UTILITY has been achieved came from John Collings, vice-presidemonstration units built by every department in Transcontinental display a comprehensive exhibit rep-& Western Air's Kansas City mainte-

with a series of unusual cutaway dent for operations, who proposed that each department create and have on resentative of its work. Their purpose was to save time, yet still present a Basic idea for the series of exhibits complete picture to TWA visitors

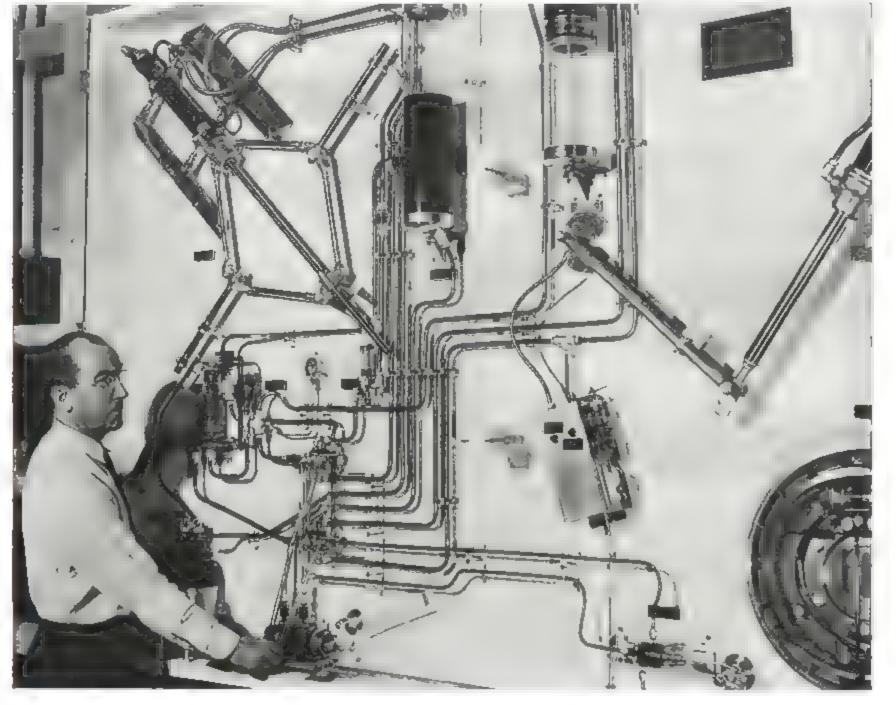

AVIATION, December, 1944

without need of their going to each workbenel . The chart of towith consequent interriptions to the flow of work.

As plans developed it was decided that such cut, way morble would uso prove invaluable as training aids, not only to apprentice and service mechanics, but also to other personnel throughout the company. With this purpose as a goal, maintenance staff assistant W. P. Dahnke was assigned to the project and supervised its execution.

TWA craftsmen are particularly proud that no outside work was done; the exhibits represent the ingenuity and work of each department. "Since working on the exhibits, the men have shown much more pride in their departments and each claims to have the most representative display." Dahnke reports. "We feel that this rise in departmental morale has already more than paid for the project."

Many of the exhibits were created from scrap materials, and furthermore considerable experience was gained in the use of plastics. Where it was desired to show fluid flows or to reveal, yet protect, delicate working parts, metal craftsmen made their first major attempt at plastic fabrication. Maintenance officials believe this will prove useful in the future.



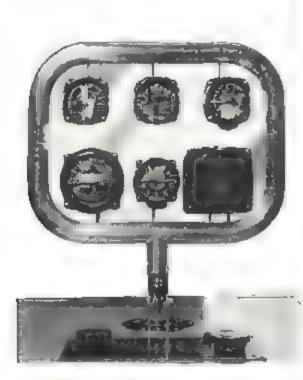



Exhibit built in TWA shops showing (above) primary flight instruments, mounted in Lucite panel supported
by aluminum frame and containing pressure
and suction lines to operate instruments.
Panel can be offset and oscillated to simulate movement of plane about three axes.
At right is rear view at panel, showing plastic covers which reveal functions of instruments while protecting delicate parts.



Mechanics in TWA's miscellaneous overhaul department built display presenting every type of metalcraft done there. Exhibit cantains examples of correct and incorrect tubing, pattern marking, and riveting. This detail of exhibit shows different welding methods employed.

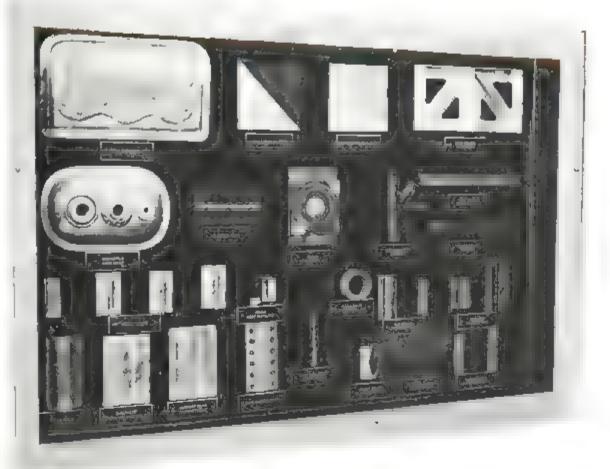

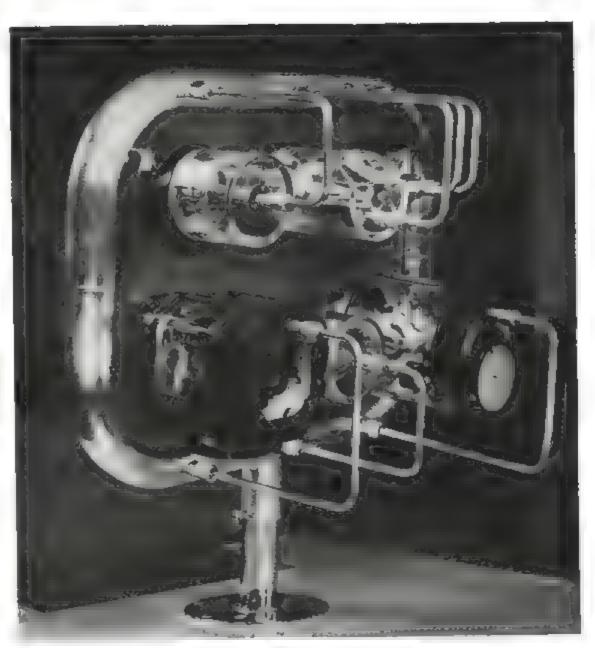


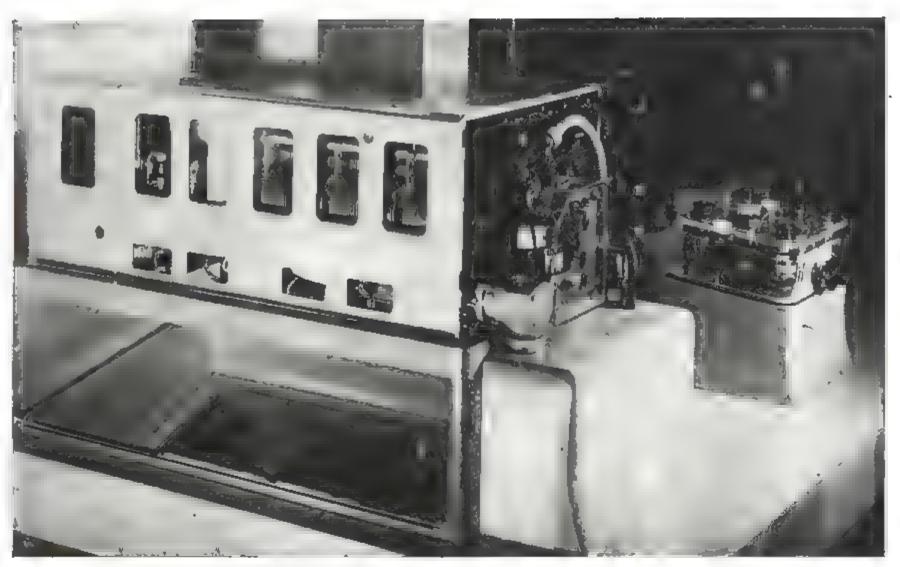

Sperry automatic direction finder is mounted above mirror by which students can look "up" to follow wiring pattern, and cases have Lucite panels to reveal all interior details. Operated

by storage bottery, unit works just as it would mounted in aircraft. For student work, loudspeaker and amplifier are substituted for head-phones used in aircraft installation.

Cutaway section of Wright Cyclone engine is mounted on easily movable stand constructed from scrap material. Engine is driven at 13 rpm, by 1-hp, electric motor set in box on base of stand.





AVIATION, December, 1944

IF YOU CAN'T BUY IT

Make It-Better

By GEORGE WARDE, Assistant Shop Superintendent, American Export Airlines

American Export's budding instrument shop couldn't buy certain test equipment for love or money (the war, you know). So they made it themselves. Result: Better than they could have bought.

strument used on aircraft

unavailable. Now, however, the in struckert department represents a tra- economic t umph or whole rearted cooperat on be-

TARTING FROM SCRATCH less than to be made in testing and checking inthree years ago American Ex- truments because there simply was no port Air mes' instrainent shop precedent to go by. Many of these today is one or the most complete in particular instruments had never been the country able to service any in-used in commercial aircraft before which, together with the unavailability This growth was not the result of equipment to properly check them, merely of our going out and baying conciliated the instrainent mainteeverything necessary, in tact, the war names picture. Despite these condihad already in do some instruments tions, though, the line maintained schedules with properly functioning

In setting up the new shop, we took tween it an the engineering and ma- into consideration all the instruments chine departments, for together they we had been using and all those that created naith of the equipment now in , we felt might someday be used on the company's aircraft. This was done by During early operations with a dis- listing all the currently used instrutinetly new type aircraft, the only ones ments and then trying to combine one of their kind, many improvisations had test stand for the various units so as

Ingenuity has played a large part in development of American Export Airlines' instrument shop. Established less than three years ago when some fast equipment had been made unavailable by war, cooperation with other company departments made it possible to design and build many essentials. Here, for example, is octant collimator designed and built in AEA shop. Instrument has primary advantage of eliminating necessity for any autside sighting.

to standardize layout and establish a pattern for future growth of the shop.

We had also to consider the problents of space, availability of equipment, and efficiency of layout. The space angle was overcome by setting up the test equipment in a central location with regard to the individual work benches. This not only enabled personnel to test equipment near the individual bench, but it also made it possible for more than one person to check or test the same type instrument at the same time

To further increase efficiency, the shop was divided into four sections:

- 1. Electrical and general instru-
- 2 Sperry instruments
- 3. Machine work and hydraulic, and
- 4. Stockroom

In order to keep the Sperry section free of dust and dirt which might be generated by any of the other sections. it was separated from the balance of the shop by glass partitions, as were the machine shop and hydraulic sec-

Although the availability of equipent was our biggest problem at that time; we now see that it was a fortunate circumstance because we have designed and built most of the instrument shop equipment ourselves for our specific needs and have, incidentally, ande marked improvements over some of the eru prient which is now on the market

One of the first things we did was to set up a Mallory rectifier to supply d.c. current throughout the entire shop, thus eliminating storage batteries and the necessity for installing an inverter to change the available d.c. power to 26 400 cycles a c power for the Autosyn instruments. Then, in order to properly test the various Autosyn and Selzen instruments for pressure, we put in operation a 2,700 lb, nitrogen tank with a 0-300-lb, regulation on it.

This enabled us to get pressure to any instrument by individual pressure valves and it also eliminated the use of hydraulic fluids. Conversely, vacuum is obtained through the use of a small pump which operates both Selzen and Autosyn manifold pressure panels.

The temperature and machine instruments are also placed on benches with 60-deg, angle panels back to back. These instruments include those for testing oil temperature, carburetor air temperature, cylinder head temperature. Wheatstone bridge, decade box, and any other temperature instrument built.

The need for bell jars or high alti-

tude test chambers was acute, and being unable to purchase them due to the existing emergency, we took a 16-in. piece of sewer pipe, 22 in. long, and welded a plate on the back and a flange on the front covered with lapped plate safety glass. By providing an inlet and outlet fitting, we were able to evacuate this chamber and simulate a condition up to 50,000 ft.

We designed and built two of these units, which are operated from one vacuum pump, and which use two barometers, one for each bell jar, calibrated in 1,000-ft. increments. In addition to this equipment for testing and calibrating altimeters, rate of climb indicators, and for any other altitude tests for various instruments, we purchased a Pioneer master barometer that is automatically temperature-controlled and is checked for accuracy with three other airlines daily. This instrument is used as our master instrument for setting barometric pressure.

Accurate checking of avigation instruments was likewise difficult without a collimator. With little likelihood of obtaining an octant collimator until after the war, the heads of the engineering, instrument, and machine departments collaborated in producing a collimator which will accurately check the entire range of any type octant now in use and do it with greatly increased speed.

To build this collimator it was necessary only to purchase two spirit levels, the necessary lens, and an old sextant. for the rest of the material was made from parts available in the various shops. The tube, which is something over 20 in, long, has a built-in light with a shield over it, having an aperture 0.0135 in. This is the star "fix" and faces inward along the tube toward the lens, whose focal length is 20

The light box is so arranged that exactness of focus may be obtained by use of a rack gear and pinion upon which it is mounted. Since the tube is mounted on bearings, between two standards, it may be swiveled to any angle from 0 to 50 deg, and it utilizes a worm gear integral with the swivel so that fine adjustments can be made. The tube has a sensitive spirit level attached to the top to determine its horizontal position. Mounted on the side of the tube, by means of an adapter plate, the quadrant of the sextant with its sliding indice and vernier adjustment can be set at any desired angle. Mounted on the indice is a second spirit level.

When the desired angle is obtained on the sextant, the angle of the tube



Chrono-tachometer, designed and built in Export's own instrument shop, with which tachameters can be checked to talerance of plus or minus 1 rpm, and which cuts former testing time in half

is changed until the spirit level of the sextant indicates the horizontals. The consequent reading shows the angle of the tube, and by sighting the starin the tube, the reading of the octant may be checked against the reading of the collimator sextant. A primary advantage of this instrument is its location in the instrument shop, thus eliminating the need for sighting an outside point, where adverse weather conditions might preclude the possibility of octant adjustments.

For some time we have been dis-



AEA adaptation of manameter which saves 20 percent time in checking and calibrating airspeed indicators. Fixed mounting and combined regulator and bleed assembly make it possible to simultaneously calibrate three indicators used by pilot, co-pilot, and avigator. Here, Foreman John Bowley shows how it's done,

satisfied with both the accuracy and tolerance of the standard methods for checking tachometers, so we employed an electric timer and revolution counter and made our own chrono-tachometer. The time formerly consumed in this operation has been cut in half, and a far greater degree of accuracy has been attained in that tachometers can now be checked to a tolerance of plus or minus 1 rpm. This procedure is to our knowledge the first time a chrono-tachometer has been used to replace a stroboscope in checking tachometers.

In checking out automatic pilots it had been necessary to put the unit in the aircraft and calibrate it with the engines running, then take it back to the shop for any necessary adjustment, and then again out to the plane and start the engine and check it all over again. This procedure was necessary since it had been impossible to purchase the necessary equipment, so we designed and constructed the entire unit in the shop. It is today one of the most complete units at La Guardia

In this connection we had quite a headache with servo units, because it was necessary to run them in for 6 hr. after overhaul. Besides the loss of time, this was inconvenient because it was necessary to use the same machine that was used to check out automatic pilots. This definitely put us at a disadvantage, so we designed and built a unit which automatically runs in two servo units for any length of time we desire. To the best of our knowledge this is the only unit of its kind in the country.



Snow removal equipment as shown here, is assential in assuring winter aperations at northern airports.

IT'S WHAT YOU DO

IT SNOWS

Half the work of snow removal is done prior to the storm. For the machinery used to keep the airport clear of drifts must be inspected and made ready for the day when the plows go out—so that the planes can come in.

THIN SNOW STAKES JOSEANT IT'S SHOW removal. But these points in and forcing it into dense windrows at the airport traffic going.

lected snow-removal equipment may are during the emergency. Double result in heavy, hampering drifts, for the snow won't wait until you're ready It "falls when it falls," regardless of adjusted, and gears and differentials consequences to the airport.

difficult to obtain and slow transporta- sary tion of new parts almost guarantees that broken-down vehicles will remain that way a long time, it is doubly important that nothing in the way of chance.

day motor vehicles which require spec- twisting, sidewise thrust on the entire additional stresses on both wheels and

to start reading the question bear the tremendous stresses ma amery with which to keep involved, and hence they must be caretully checked for wear and adjusted Breakdowns and delays from neg- so that they may give continuous servtires must be changed for single ones; clutches and brakes have to be carefully

Reason for this hes in the fact that snow removal is a job in which there is no standard by which to measure the stresses imposed on the machinery. preparation for bad weather be left to Not only is there the normal truck load -for lots of ballast is required to give tront, tending to make the front wheels There are but few points on present- wheel traction-but there is also a jump and slip, thus throwing heavy ial preparation for the heavy work of structure, caused by plowing the snow axles

the side of the truck's path

Engine maintenance is understood possibly better by aircraft mechanics than by most others, so it will be assumed that the engine is in typical airplane engine condition, that is, practically as good as new

First of all, it will be necessary to require more exact adjustment than remove the usual double rear tires In these days, when repairs are would ordinarily be considered neces- and replace with single ones (Fig. 1a and 1b). Reason for this is that snow gets under the wide double tire, lifting the outer one off its firm footing and causing it to slip. Another reason is that the rear wheels-when double tired-have more traction than the

Changing to single tires is not a difficult operation, but stud breakage will result if instructions are not followed. The wedge ring is removed by taking off the six holding nuts. Then the outer tire and rim are taken off, followed by the flat spacer ring and the inside tire and rim. This completes removal of dual tires.

The wedge ring is then replaced, with offset slanting inwards over the wheel and valve opening in correct position. The tire is then placed on the wheel, with drop wedge side of run outward, and is clamped in place with six rim lugs and nuts. These lugs are only used with single tires. A rim wrench is the only tool which is needed

Chains should be used on all wheels. preferably the type with two link spacing. Operating a snowplow without chains results in overstressing the differentials, due to slippage.

Clutch pedal adjustment is neces sary to allow full clutch engagement Clutch ring (shown in Fig 2) should be adjusted to give correct clearances (see Fig. 3). This adjustment is made by moving the ring with a heavy screwdriver engaged with the teeth in the ring face. Distance (A) is necessary to allow for normal clutch wear, which would eventually bring the clutch pedal arm against the floorboards. When the clutch has been correctly adjusted, it should be fully disengaged when distance (B) between bottom of pedal and floor is 34 in. If these adjustments cannot be made as directed, new clutch facings should be corrected until the lock are necessary

Transmission and transfer gear case should be inspected for cracks or leaks which, if present, should be welded. Leaking gaskets or oil seals should be replaced. Transfer chain should be adjusted until it has not more than 1/2 in. slack motion. This is done by turning eccentric housings (Fig. 4) until indicators on both ends are at the same index points. If this point is not carefully observed, the shaft will be out of line and the result will be damage to both shaft bearings and

Examination of Fig. 5 will give a clear understanding why a center differential is required when drive is to all four wheels. As each wheel turns on a different radius, while delivering its share of power, and as the front axle averages a higher speed than does the rear, it is obvious that some method is necessary to provide differential action between the two axles, in addition to the conventional differential in the axles themselves. This is the reason for the transfer and center differential, and it is essential that the mechanic understand this point. The differential should be adjusted by turning the notched collar with a screwdriver (as shown in Fig. 6). A gasket should be used under the inspection plate when the latter is replaced.

In connection with the above, the action of the center differential lock should be checked, because stretching of the control cable from the cab will result in improper operation of this lock. In this case, the lock cable works satisfactorily.



Fig. 2. Clutch assembled in flywheel, with housing removed to show method of making adjustments with screwdriver. In practice, housing would be in place, and access to clutch would be by inspection plate.


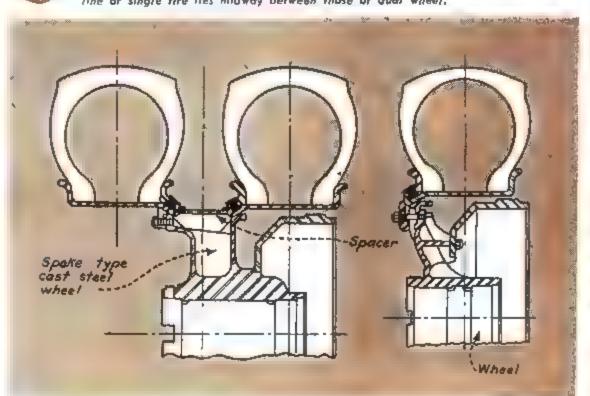


Fig. 3. Pedal clearance is important, because insufficient motion may prevent correct clutch action. If dimensions shown cannot be obtained by adjusting clutch (as shown in Fig. 2), then clutch requires refacing.



Fig. 1. Method of attaching single rear tires for snow removal. Notice that center ine of single tire lies midway between those of dual wheel.




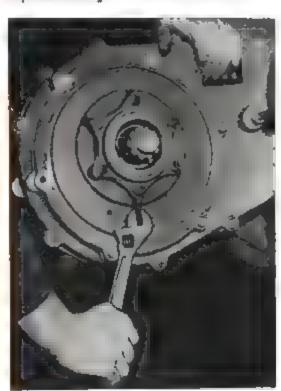


Fig 4. When adjusting transfer gear chain, indicators at each end of casing must be in same position, otherwise shaft will not be in alignment.

AVIATION. December 1944

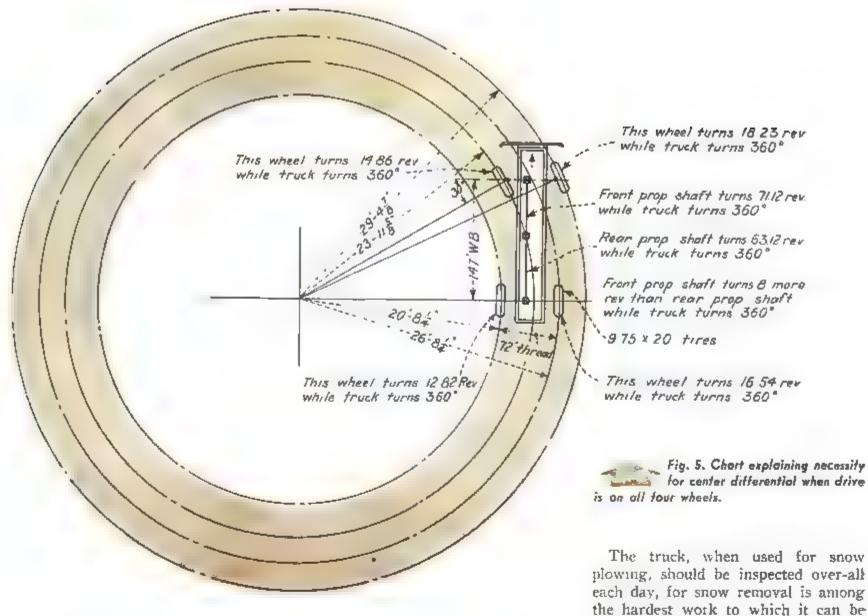

This wheel turns 18 23 rev while truck turns 360'

Front prop shaft turns 71.12 rev. while truck turns 360°

Rear prop shaft turns 63.12 rev while truck turns 360°

Front prop shaft turns 8 more rev than rear prop shaft while truck turns 360°

9 75 × 20 tires

This wheel turns 16 54 rev while truck turns 360°

Fig. 5. Chart explaining necessity for center differential when drive is on all four wheels.

The truck, when used for snow

subjected. Wheel stud nuts, especially,

have a tendency to loosen up. Owing

to the engine being run for consider-

able periods in proportion to mileage,

careful records of working hours


should be kept so that engine oil can

be changed and the crankcase and lub-

rication system flushed out every 60


In mounting, place plow and truck

SAE No. 90 mineral oil is used in the transmission, transfer, propeller shaft, steering gear, and axle differential housings. Wheel bearings of both axles should be given new grease every 8.000 mi.



it is advisable to check pinion and ring gear adjustment, wheel bearings, and front axle ball and socket adjustment, while inspecting the axles. Brakes should require little atten-

tion beyond adjusting to the clearances shown in Fig. 7. Some operators advise giving front brakes slightly more clearance than the rear units, claiming that this permits the front-steering-wheels to turn more easily when brakes are applied on a curve. However, this is a matter for each driver to decide for himself, since equal adjustment of all brakes also has been found to be satisfactory.



Front and rear axles require no special preparation for winter use, but

working hours. Recording of mileage alone is of little use when operating almost continuously in low gear. When attaching the snowplow, it should be remembered that this piece of equipment is quite heavy; further, due to the nature of the work performed, it exerts a heavy stress on the framework of the truck. For both these reasons the snowplow should becoupled as closely as possible to the vehicle.

on a level floor. Do not attempt toattach the plow when the truck is on an uneven footing, because it will bealmost impossible to align the twopieces of equipment so that they will' give satisfactory service. After the plow is ready for operation, the truck should be ballasted, either with material which will not shiftsuch as sand bags-or material which is fastened down to prevent movement. Weight should be so distributed that total loading, including weight of plow, should be evenly divided over all four

Service Snafu

NIPPED IN THE BUD*

N AIRPLANE CAN BE LOST from combat or transport duty merely because a valve has been improperly re-assembled in the field, It might be a perfectly natural mistake, but with trasaus a prince of this sanje model in service in a rist as many parts of the world, the potential danger is increased that many times

It is a danger which makes absolutely imperative the rapid and complete distribution of instructions for the correct assembly procedure. Early last year Douglas Aircraft Co, realized

* Like All work of the Douglas Service staff, this article as been prepared as a cooperative venture by

Douglas develops fast-moving publication with worldwide distribution—to get maintenance information where it's needed while probloms are still in embryo stage. Result has been more combat and transport planes in the air more of the time.

that current service questions could no longer be handled entirely by individual correspondence and field service representatives, and so it sought new means of achieving faster information distribution.

Creation of a new type of service and maintenance publication, Douglas from the greatly increased use of aircraft, rapid technical advances, constant changes, development of new Douglas models to meet war needs, and the large numbers of newly trained military and commercial maintenance personnel.

In April of last year, 1,000 copies of Service, solved the problems arising the first issue went to military officers.

potential—get from Douglas to armed forces and airlines in a month or less. Great valume of Douglas craft in service in cambat and transport planes.

Here is how information about traubles—often only all parts of the world made necessary this new means of speeding distribution of information essential to greater utilization of both

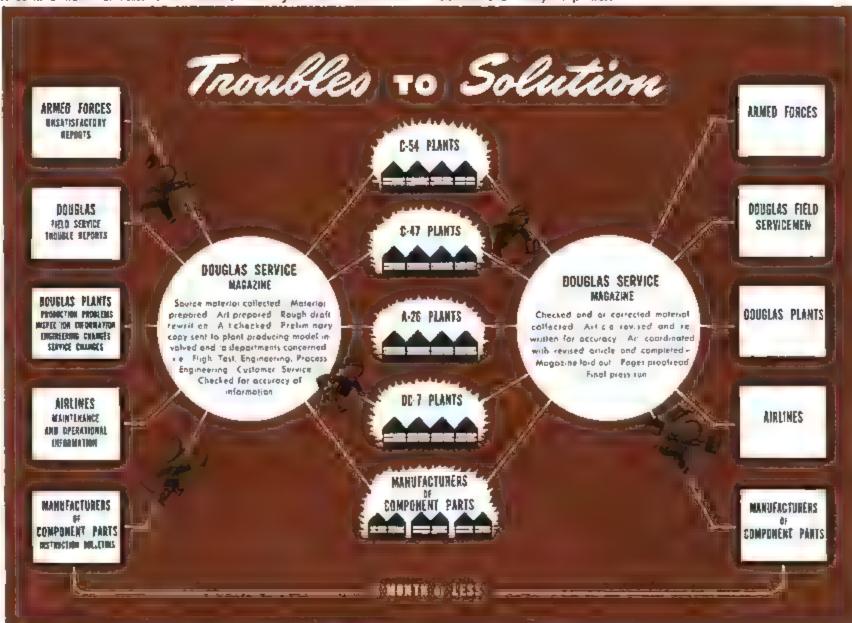


Fig. 6. Method of adjusting differential by using screwdriver on notched collar (A). Gaskets should be inspected and replaced if they show signs of leakage.

Fig. 7. Brakeshoe clearance should be carefully checked to see that it conforms to figures given here.

wheels.

FROM Geo. S. Murphy To. J. D. Beok	COCATION San Diego Naval Air Base PLANT Oklahoma City Team TORY No. 1
	No. Hours on Plane XXX No. Hours on Part XXX
Subject: (What are you tal	king about?)
Action Taken: (What did yo	ou do about it?)
Comments: (What do you the think about it	ink about it and what does the operator
Action Required: (What ar	e we to do about it?)

Douglas Field Service Report form, with questions in under each heading. These reports very often provide material for parenthesis indicating material which would be written accounts going into Douglas' unique publication on maintenance.

airline executives, and manufacturers of component parts. Today, over 10,-000 copies go all over the world each month. A large percentage goes directly to the men who actually service the planes-and these men keep writing in for more. It has been conclusively demonstrated that this monthly publication can often keep troubles from becoming chronic by anticipating them and by speedily circulating correct maintenance procedures to all

It is felt that the production of this publication lifts a tremendous burden from the already overworked service departments, since many answers reach the field before the questions themselves are asked.

The magazine is divided into sections corresponding to the Douglas models in current use. Within these sections are developed proper lubrication methods, trouble shooting procedures for all systems, concise and complete service instructions, new maintenance shortcuts, advance information on new installations, and practical field re-works. Articles are illustrat ed by photographs, cutaways, schematic diagrams, and charts to clarify beyond doubt the particular service problem or procedure.

It has been found that diagrams of complicated systems or assemblies, such as the automatic pilot, hydraulic regulators, accumulators, etc., are of invaluable assistance in showing the engineer or mechanic just what takes place inside the unit. This not only eliminates improper disassembly and assembly but localizes the trouble and prevents much unnecessary investigation and labor. Cartoons are also used frequently to warn against carelessness in operating and handling equipment which may greatly reduce the life of the airplane parts.

Each article is organized to give a complete picture of the problem. Troubles are traced to their possible causes and the remedies are given in full detail. Procedures for checking systems, assemblies or parts, steps in installation changes, etc., are stated as clearly and simply as possible. Every care is taken to prevent wordy, ambiguous instructions.

Amply cross-referenced quarterly indexes and an annual recapitulation are also organized by model, and then by major and minor subject breakdowns.

In order to achieve thoroughly correlated and coordinated answers to service and maintenance problems, a

complex but efficient system for gathering and checking material has been developed. One of the chief difficulties is getting new information into the field in the shortest possible time, yet clearing and coordinating it with the major Douglas plants, three of which are in the Middle West, Gradually, the following procedure for gathering and checking material was evolved to cover all phases of the situa-

Naturally, the ideas for all articles do not originate with the staff. Many of them are written as direct answers to questions or troubles submitted by Douglas Field Service Representatives, the Army, Navy, and commercial operators. If investigation indicates that a condition is apt to pass from the "isolated case" to a chronic stage, action is taken immediately.

Frequently in the course of their investigations the staff service liaison engineers hit upon new ideas for articles which should be made available to operating and maintenance personnel. The other common source of articles is material submitted for circulation by other Douglas departments.

In the normal course of events, all of the trouble reports and all of the questions from operators are answered

AVIATION, December, 1944

† TLE	_	1	1 1				-		-			L,T∺	_					_		CL	155					DA	TE		6,61		DEL	
ROJTE			2	3	4	5	6	7	8	9	10	10	2	13	4	15,	16	7	8.	19	20	21	22	23	24	Æ	26	22	28			
WRITER L.B.								á				Ť	٦	\exists	1	7	7	7		-	7					~	-		-49	- 24	2	21
ART WORK B.8.8.		匚	Ш						<u>a</u>	T	\Box	7	\exists	7	7	_	+	$^{+}$	_	7	+	+	\dashv		٦		_	Н	\blacksquare		\rightarrow	+
PREL M.						_ [-	\neg	T	7	\dashv	\neg	7	\forall	+	\dagger	+	十	\dashv	1	7	\dashv	+	\dashv	-		Н			\dashv	+
TECH. CHECK					_				T	\neg	寸	\top	7	\top	7	十	- -	+	\dashv	-	+	\dashv		+	\dashv	-+	-	\vdash	\dashv	-	-	+
CAPTIONS	_					Т		T	7	7	7	寸	7	+	\dagger	+	+	+	+	+	+	+	\dashv	\dashv	\dashv			Н	-	{	-	+
PROOFS						T		\top	7	\neg	\top	1	7		+	+	+	+	+	\pm	+	+	+		┪	-	-1	H	-	-1	+	+
REWRITE FALLA.	. 1			7			7				<u>a</u>	-	\dagger	\top	†	+	┿	+	+	╁	+	┰	+	\dashv	+	\dashv	\dashv	\vdash	-		+	-
K.S.P.	2.	П		\neg	7	\top	7	1	7	۴	222		†	۲,	1	+	+	+	-	+	+	+	+	+	-	\dashv	\dashv			\dashv	-	1
	3.		\neg	ヿ	7	\top	7	\dashv	寸	十.	T	+	+	-10	7	+	╬	+	+	+	+	-	+		4	\dashv	_	-	4	_	4	4
TYPE STENOGRAPHER			\neg	╛	\neg	+	7	+	+	-+	+	+	+			+	+	+-	+		+	+	+	+	-			_		4	4	4
OFFICE FINAL	_		-	+	-	+	-	+	-	+		+	+	5		+	-	+	-	-	+	-		_				_				
PPROVAL SERVICE	1 1	\neg		7	-	+	+	+	+		+		+	+	٠		_	+	-	4	1	٠	4	Ļ	4		4	_	4			
HICAGO SERVICE	2	-	+	\rightarrow	\dashv	-	+	+	╬	+		+	+	+	-2	ď	9	4	4	1	4	4	4	4	_[.	_						
L SEGUNDO ENGINEERING	3	\dashv	+	+	-	+	+	+	+	+	+	4	+	-	Z	K	\$_		4	\perp	\perp	4	Ţ	\perp	1					Ţ		
L SEGUNDO SERVICE	4	\dashv	+	\dashv	+-	+	+	+	+	+	+	+	+	-	Z	4	4	9_	-	\perp	\perp	<u> </u> .		_	1				\top		Т	T
ANTA MONICA SERV CE	5.	\dashv	-	+	-+	+	+	+	+	+	+	-	+	+	4	4	4		Ļ	4	1	\perp	1	4	_		\perp		1			
ANTA MON CA ENGINEERING		-+	+		+	- -		+-	+	+	- -	+	+	-	Z	4	_	8		_	Ļ	1	1		Ţ							
HEF PILOT	5.	+	+		+	-	╬	+-	+-	+	+	+	-	+	Z		-		<u>S</u> _	1	1	┸	1	Д.	1			\perp				
ING BEACH SERV CE	8.	+		+	+	╁	+	+-	+	-	+	+	+	+	Z		-	4	<u> </u>	1	L	\perp	L	1	\perp							
ING BEACH ENGINEERING	2.1	-	-		╬	+	+	+	╀	+	+	-	+	-	Z		╄.		_	1	L	- -	\perp	\perp	L							
PERIMENTAL FLIGHT		-+		+	+	+	+	+	╬	+	+-	+	+	-	Z		-		-		L	1_	\perp	4	\perp	\perp		\perp	1			
ELD SERV CE	40	-		+	+	+	+	- -	╀	+	+	+	Ļ	+	Z	4	1	╄		8_	L	⊥.			1						Т	
LSA SERVICE	Del	+	+	-		+	+	+	╀-	- -	+	↓_	Ŀ	1	Z	4_	\perp			4				┨.			T	Т	\top	T	Т	
	4.	+	+	+	+	+	+	+	ļ	4	╀	+	1	\perp		1		_		4			I				T	7	T	T		
	_		+	+	+	+-	╁	+	┼-	+	+	╄	╄	ļ.,	L	Ļ	ļ_			.3						T		T	T			
F.L.A. K. S.P.	3		+	+	+	+	+	+-	╀	+	╀	<u> </u>	L	Ŀ	L	\perp	L				6	8	Γ		Г	Ţ	T	T	\top	T		
	-	-	+	+	+	+	+	-	_	\downarrow	\perp	╙	L	_	L	L						Z	Г		8				\top	T	1	
NAL O.K. ED TOR	-	-	-	+	-	+-	1	-		1					L										1,		3	1	十	1		1
LAYOUT 8.8.8.	-	-	-	-	+	_	L	1_	L														T		1		1	1	+		-	
PAGE PROOF		-	-	1	_	-	L																	+	+		+	+	+	-	+	
																										1-	+	-	+	-		-
																	-			-	-		-									
																																-

at once by the customer service department at the plant where the model is built. The staff of the magazine receives copies of all such queries and finds them a fruitful source of possible articles, the idea being that if one operator asks a certain question it is probable that many others will need the same information sooner or later

Regardless of the source of the idea. each article passes through the same channels. The editor assigns the subject to a service liaison engineer, who investigates its possibilities thoroughly. If an article seems warranted, every possible source of information (Turn to page 297)

There's extensive use of art work. for experience has proved that even complex illustrations speed 🖳 service and maintenance men's work in keeping combat and transport planes aloft. This is route sheet for a single art piece, which is put through works' at some time text material is in

9615 831 487 5000 To fe one place not all a or all. EXTEND PMENS ON LINE TO PB PART NUMBER 2/5/706 SHOULD BE 2/5/06 O.K AS NOTED ABOVE EHB E H. B. 10 16 O. K AS NOTED FLA ENGRAPER & PROBER 10 22 CLEAN UP CHECK NARKS ec re-FARD WARE DECREE MARKS DARKER FLAIDS PAOP BALANCING F. A 12 BOLT INSTALLATION



Through use of Mobile Training Unit, graphic instruction can be carried on right alongside ships. Here, at bose in England, hydraulics instructor has brought mockup from truck to explain operation of emergency landing gear lowering device to a group of North American Mustana pilots.

FIX-IT SCHOOL On Wheels

By WILLIAM J. HARGEST

MONG THE HUNDREDS OF THOU-SANDS of vehicles with our armed forces brought into France during the summer, one was 5-ton trailer truck packed with crates containing mockups of the engine and ain operating equipment for an American fighter plane.

This vehicle was a traveling school to keep the pilots and ground crews abreast of the latest developments and modifications for this airplane, and to acquaint them with emergency procedure and trouble-shooting tricks de-

AAF's Mobile Training Units carry mockups, models, cutaways, and hookups right to the front—to see that the man-in-the-uniform knows the last word on trouble shooting.

certainly unique unto itself. It was a veloped out of combat experience by the pilots operating from bases in Brit-


> The trailer truck rolled to the edge of an advance fighter base, and beneath camouflage netting its crew unloaded the crates, set them up in a semi-circle, and unhinged the top, front, and sides of each crate. These swung open as panels-to reveal working models of the engine, engine acces-

sories, plane operating and control equipment, and armament. Some of the mockups have cutaway prototypes that show how the parts function. Others are complete hookups of electrical, mechanical, and hydraulic apparatus and instruments aboard the ship, all of which function exactly as they do aboard the aircraft.

While the mockups were being uncrated and arranged, the officer in

AVIATION, December, 1944



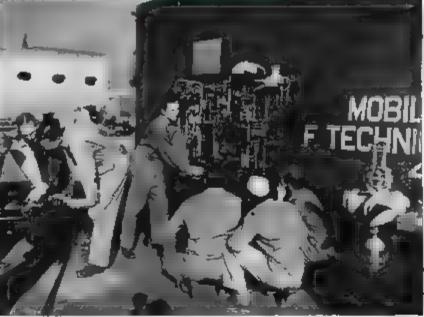

Working models of various plane units are fitted in specral cases which open in panel form, ready for display and explanation. Any convenient place is suitable for a class. Left photo shows school held in Nissen hut at bomber base, where

lecture underway concerns operation of emergency switch for salvaing bambs from Boeing Flying Fortress. At right, truck itself forms "backdrop" for class of ground crewmen learning intricacies of Lockheed P-38 electrical system.

charge of the mobile training unit and the commanding officer of the advance fighter base arranged a schedule for pilots and service mechanics to attend classes held under the direction of the MTU (Mobile Training Unit) crew composed of specially trained enlisted men. Classroom schedules were pre-


pared to fit the time available, the num- menced. And all this was done within ber of men needing training and the type of training desired.

With the schedules prepared and with the mockups arranged conveniently to facilitate and speed instructron, including the use of the trailer itself as one classroom, classes com- service mechanics of this fighter group


a few hours of the training unit's ar-

Here in France close behind the retreating Germans, with thousands of Jerries still behind our advance forces and yet to be rounded up, the pilots and

Scape of MTU's organization is shown in this diagram revealing plane categories covered and complement of specialist crews carried by each instruction truck.

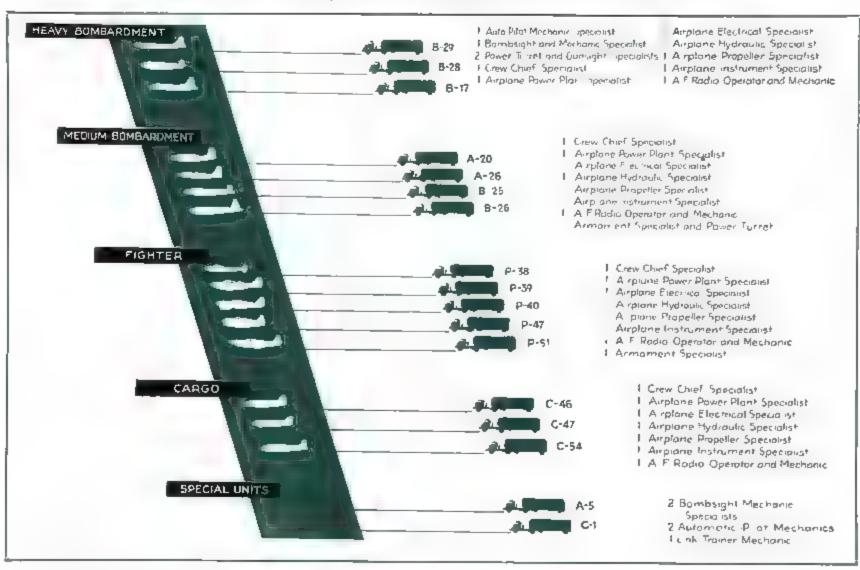








were receiving the same instructions on modifications and trouble shooting as were being given to personnel still being trained in the states. Thus, education was keeping pace with the lessons learned in combat-education directly under the enemy's guns


Today, many other mobile training units are functioning with our air forces at the front. Ten mobile training units were initially sent to the European Theater last March. Additional units have since arrived, making a total of approximately 38 units.

In England there are nine Boeing B-17 units, seven Consolidated B-24 units, five Republic P-47 units, five North American P-51 units, two Lockheed P-38 units, one Martin B 26 unit. and one Douglas A 20 unit; in addition, there are two automatic pilot units, one Sperry and one Minneapolis-Honeywell, Of this total, 28 operate with the 8th Air Force and 10 with the 9th Air Force. While in this theater, they are controlled by the Air Service Command, USSTAF (United States Strategic Air Forces), but they receive their movement orders, housing, messing, and housekeeping functions from the using Air Force.

More than 100 MTU's are touring bases in combat theaters and in the United States. Practically every make of American aircraft is represented. Some of the units are built on con-(Turn to page 279)

Arriving at a base, MTU men always level their curricula against specific local problems, and when solutions or short-cuts are hit upon at one field, they see that the good word is passed an to other fields. Instructor is seen pointing out to sergeant how washer placed in well shaft of discharge nossle of corburetor will cure fuel leaks which cause abortive flights.

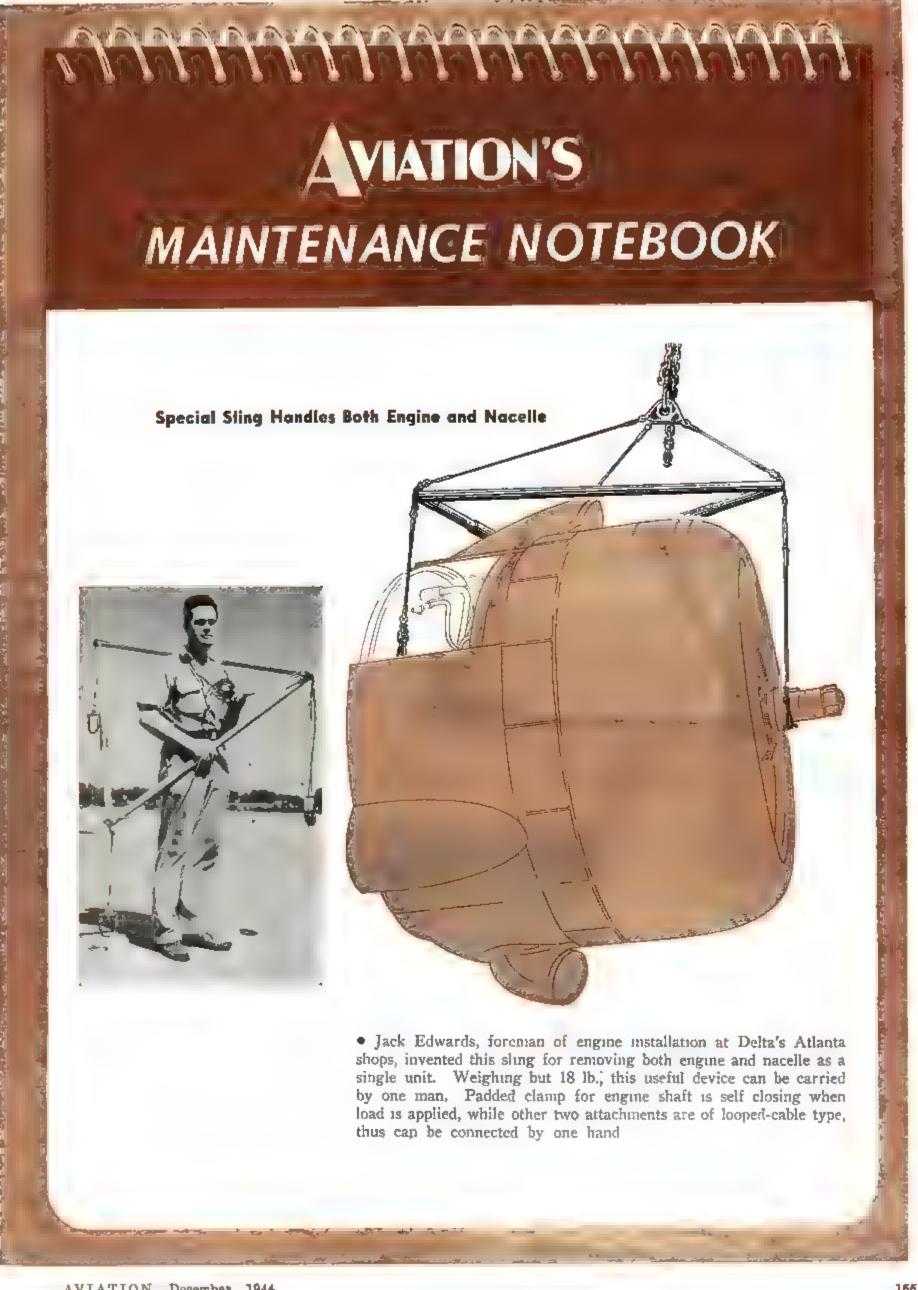

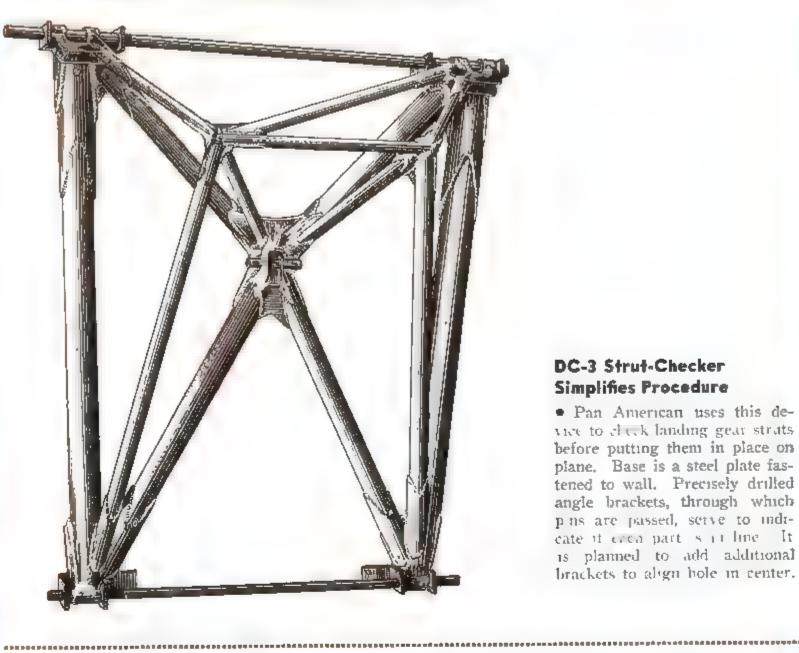

DC-3 Strut-Checker Simplifies Procedure


• Pan American uses this device to el eck landing gear strats before putting them in place on plane. Base is a steel plate fastened to wall. Precisely drilled angle brackets, through which pins are passed, serve to indicate if erea part 8 11 line. It is planned to add additional brackets to align hole in center.

Special Bench Speeds Cowl Flap Repair

• John M. Haggard, TWA's senior mechanic, designed this cowl flap bench to eliminate dragging of air hose and to faditate locating of small parts. Sport air hose in center keeps hose out from under foot, while revolving partitioned tray enables worker to find any small part he requires. Tools are kept in lockers beneath bench.



AVIATION'S MAINTENANCE NOTEBOOK

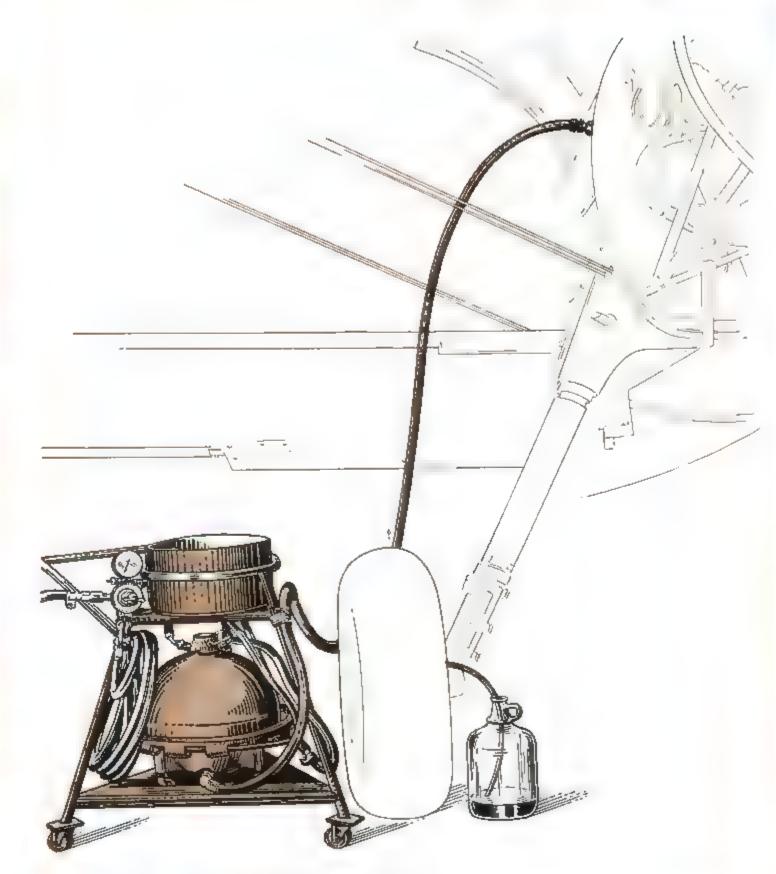

adaladadadadada

One Man Handles This Simplified Brake Bleeder

 Brake bleeding on PT-17's formerly required time of three men for 5 mm., but by using this gadget, built by Rankin Aeronautical Academy, one man can do job in little more than 1/5th total time of old method. Made from salvaged parts, bleeder is used with 50 ps. air, taken through regulator at top. Fluid line is attached to top of brake cylinder by threaded fitting A small valve in line stops flow when no more air bubbles

appear. In operation, bleeder hose is screwed into wheel cylinder fitting, main fluid hose is connected to top of master cylinder, and valve is opened Fluid under pressure is let into master cylinder, and a valve at wheel cylinder permits oil to flow through entire system until no more air is seen to escape. Wheel cylinder valve is first closed, then valve in main fluid line. Outfit is easily moved on castered wheels.




Gas Truck Hose Winder Features Braced Crank

• Formerly forced to support weight of crank while rewinding hose on gas trucks, UAL's mechanics now use hand crank supported by two pronged brace shown here, saving two thirds of time and doing a neater rewinding job, because two hands may be used to guide hose. E. C. Berr, UAL's lead mechanic at San Francisco, invented device.

Hinged Holder Prevents Cord-Plug Troubles

• Albert J Rogge, Bruning, Neb., AAF mechanic, prevents cord plugs from being pulled out—by means of this hinged holder, which overlaps plugs and avoids trouble caused by connections being broken when cord is accidentally jerked. Spring hinge permits raising of flap to make or break connections.

158

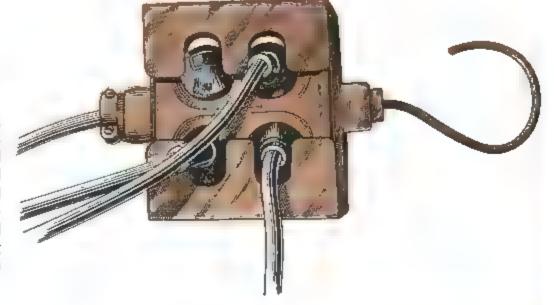


AVIATION'S MAINTENANCE NOTEBOOK

Guard Protects Operator from Falling Loads


• Constructed of heavy tubing, this device protects truck operator from accident in event of heavy load falling backwards. Hinged at both ends, guard is fitted with linkage at rear which permits tilting of forward hoisting unit. Devised by Douglas, this idea has many applications at airports where heavy loads are handled.



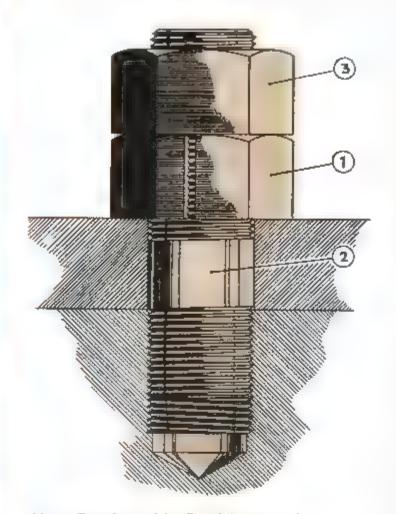


Nuts Employed in Stud Removal

• To remove studs, General Electric uses two standard nuts. One is slotted lengthwise (1) and screwed first onto stud (2). Other nut (3) is then jammed down on slotted one, to which wrench is applied. Split nut binds on threads and extra friction turns even tightest studs

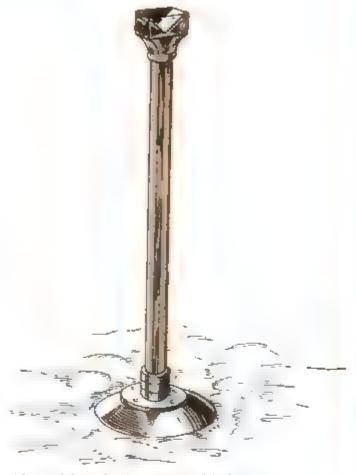

New Plastic Runway Light Extends Above Snow Level


• To mark runways under deep snow, a plastic rod unit with prismatic top to reflect light in two directions has been invented by Technical Development Division of CAA. Rods screw into usual flush sockets and are of a length to extend above any snow depth in which aircraft can operate.

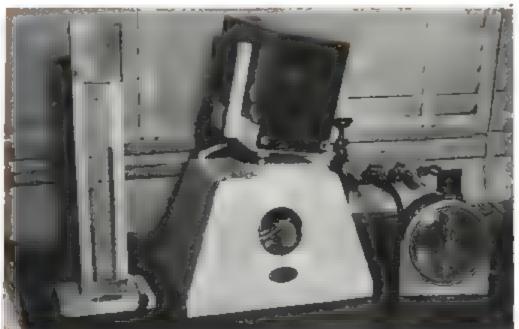

Artificial Horizon Tester Checks Time and Pressure


• Pan American made this Scoresby-type tester with tab motor in base for testing directional gyros and artificial horizons. With manometer (left) and timer (right) both time and pressure can be checked during tests.

AVIATION'S MAINTENANCE NOTEBOOK

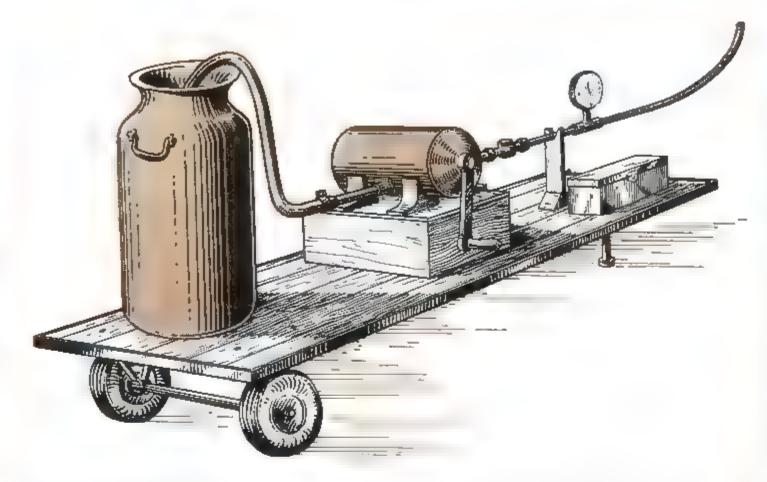


Portable Pre-Oiler Rig Doubles for Pressure Work

 Using a hand-driven pressure pump of either vane or gear type, this pre-oiler can be moved any place where it is needed. Fivegallon container can be heated with blowtorch without danger of fire. When fitted with pressure gage, rig has many other uses as pressure testing device.

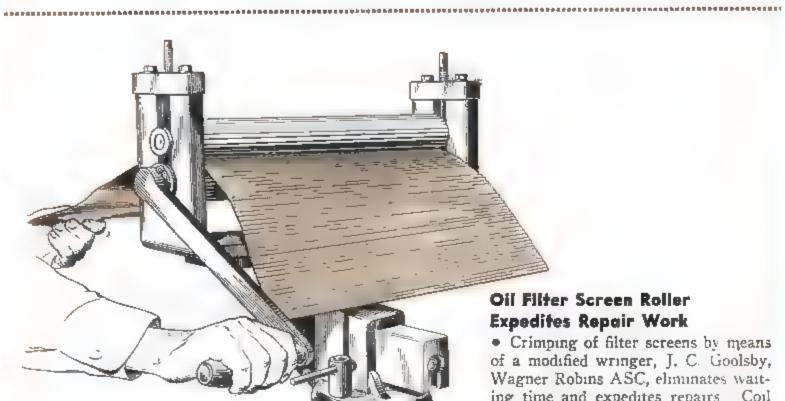

Oil Filter Screen Roller **Expedites Repair Work**

· Crimping of filter screens by means of a modified wringer, J. C. Goolsby, Wagner Robins ASC, eliminates waiting time and expedites repairs Coil springs above bearings give uniform pressure during operation

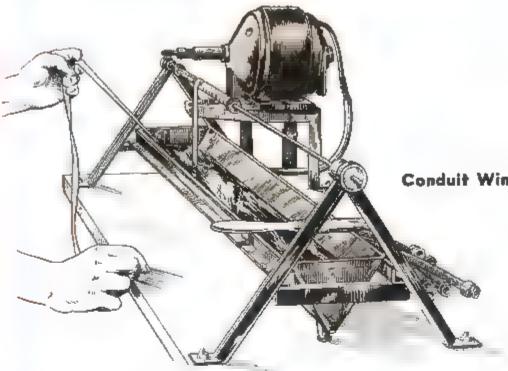


Conduit Winder Brings Economies

destatió de en encancament de encante que en compressiva de complexación de co

By using an electrically driven conduit winder for covering ignition leads with doped, pinked tape, Charles Donovan of PCA saves 50 percent of time formerly expended. Conduit is placed on mandrel, while tape passes under a bar in trough of dope, then up to conduit on which it is wound.

Router Caliper Prevents Mistakes

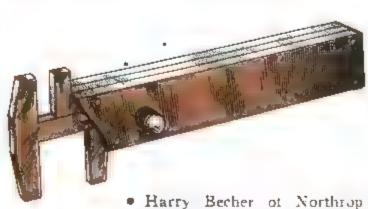

• Harry Becher of Northrop made this caliper to speed up work and curb errors in choosing correct relative sizes of router cutters and pins. When open jaw is set to cutter size, diameter of pin is given by opposite jaw.



AVIATION'S MAINTENANCE NOTEBOOK







Special Scoresby Tests
Gyro Horizon or Bank & Turn

• Operated by electric motor beneath bench, this two-position bank-and-turn and gyro-horizon Scoresby used by C. & S. obtains its rolling motion from round plate with several holes at different radii. Air hose at right supplies motive power for instruments.

Valve Refacer Has Special Features

• Supplied with collets split from both ends to afford better and more accurate grip, this heavy duty valve refacer, used by TWA, has a 12-in. grinding wheel operated by motor separate from that which turns valve. Indicator (seen a bove valve) shows face accuracy to .0001 in. Heavy bronze bearings on 1½ in. shaft give rigidity to valve, eliminating chatter.

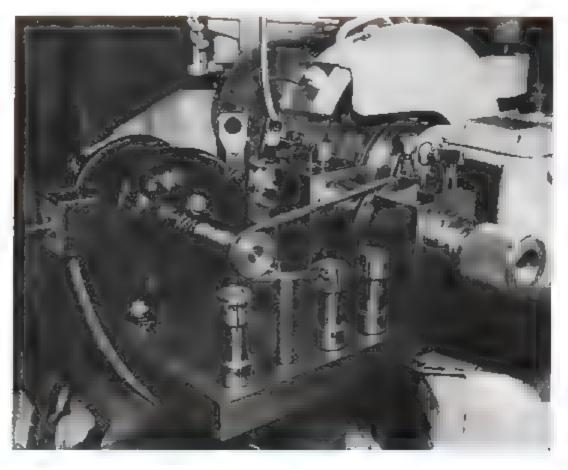


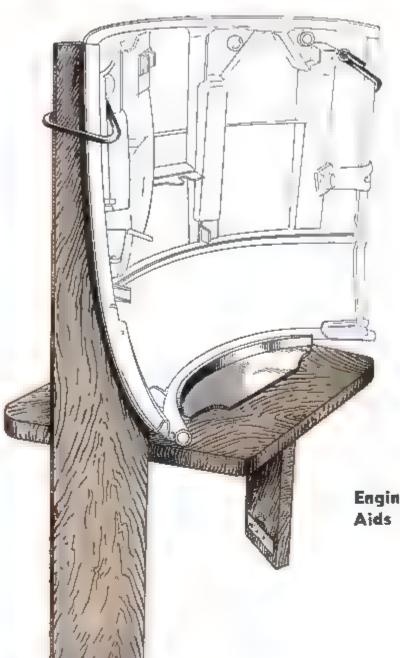

Engine-Cowling Bench Aids in Riveting

• United Air Lines uses this bench for holding curved cowl plates while riveting Lower shelf both holds tools and steadies work. Invented by company mechanics, this simple device saves much time while affording a firm support for otherwise hard-to-hold parts

Grommet Stretcher Speeds Production

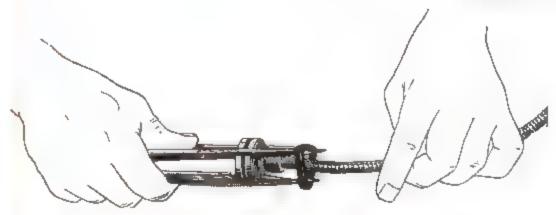


 curtiss-Wright saves time, fingers, and material by using simple—three pronged—tool shown—here—Grommet—is scretched without damage and e-cased when in place

AVIATION'S MAINTENANCE NOTEBOOK




Soviets Use Truck Rig As Starting Booster

• When winter cold slows "turn over", Soviet airmen use specialrigged truck for starting booster. Mechanic stands on platform on front of truck and engages motor driven shaft with propeller. Truck's headights illuminate job. (Sovfoto)

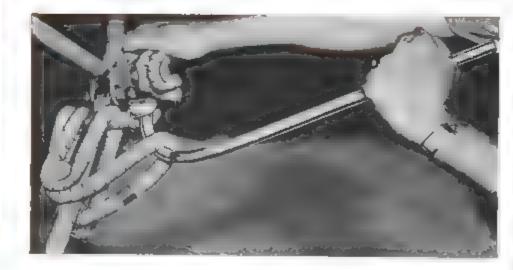

Rubber-Stretching Jimmy Saves Hands


 Eliminating danger and lost time in fitting bungee shockabsorbers to landing gear or tail wheels of light airplanes, this tool does work in 2 min, which formerly required 15.

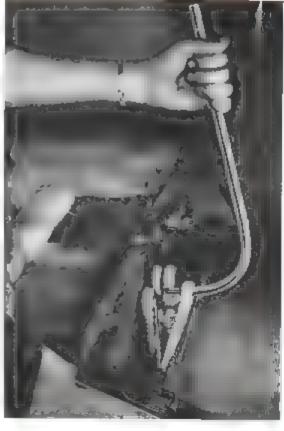



Shock-Strut Oiler Bleeds and Fills at Once

• P. V. Chaffee, Clintonville, Wis., airport manager, uses this tank for air-bleed and shock-strut filling. Hydraulic fluid is kept under pressure in tank, being fed from bottom to lower end of strut. Air escapes at top until fluid appears, when outlet is closed and pressure built up in strut cylinder to required point. By this means two operations—bleed and filling—are completed at same time.

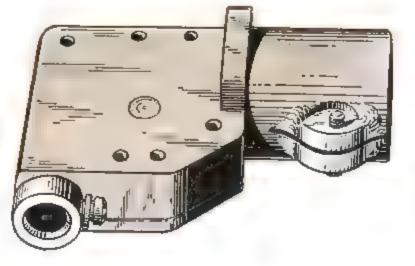

Hammer Attachment For Right-Angle Riveting

• At Ogden ASC, Raymond Eaton, of sheet metal department, made this hammer attachment to reach formerly inaccessible places. Cover houses plunger actuated by hammer. Curved and pivoted hammer, driven by plunger, drives second, slotted plunger (shown at left). Attachment takes place of 90-deg gun, has saved much time and material.

AVIATION'S MAINTENANCE NOTEBOOK





G. I. Sergeant Builds Time-Saving Tire Remover

• Master Sgt. Walter M. Baluka, in charge of U. S. Army welding depot in Italy, invented and built this hydraulically operated attachment to a commercial tire remover, using an old aircraft hydraulic cylinder and such odd parts as he could salvage. Hand pump is supplied from reservoir near top of cylinder. This device has saved much time in removing heavy aircraft tires. (British Combine photo)

Simple Dial Unit Checks Bearings


 Ball and roller bearings are checked in this simple device, made at UAL's Cheyenne shops. Bearing is centered by conical washer, tightened by thumbnut. Any eccentricity is shown on indicator dial

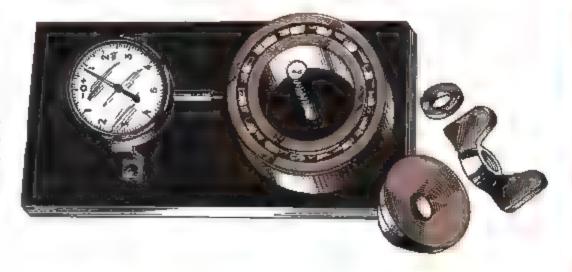

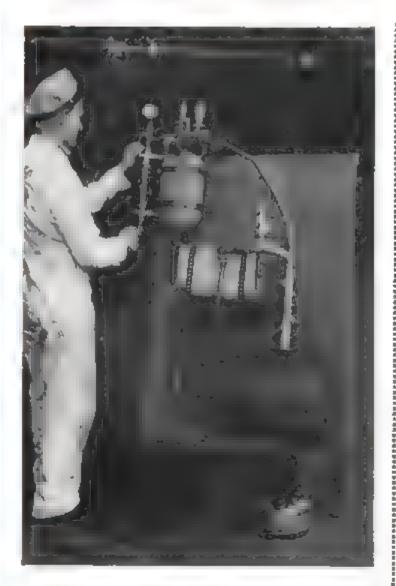

DC-3 Heater Mockup Simplifies Instruction

• To instruct mechanics in upkeep and inspection of DC-3 heating system, C & S built this mockup, enabling entire installation to be demonstrated more effectively, and in far less time, than would be possible in plane itself.

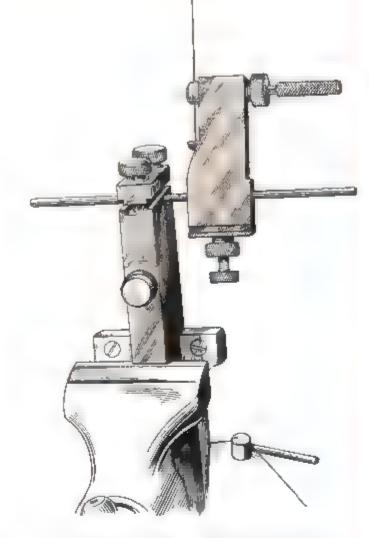

Coiler Device Makes Odd-Size Springs

• Perley B. Ramsey, instrument mechanic in ASC Mobile Unit, designed this machine for making springs in sizes not usually available. Made with changeable core, winder has capacity running from 1/64 in. i.d. to 1¼ in. i.d. Setscrew on handle governs tension of spring wire being wound



Special Sorter Saves 17,000 Rivets Hourly


• Dumped into hopper (at right in picture) rivets are sorted at rate of 17,000 per hr. by this machine. Inventor is Edward J. Mayes, Pan American's assistant chief of metal shop at N.Y.C. Chipper terminal, who is here shown operating apparatus.

177777777777777

AVIATION'S MAINTENANCE NOTEBOOK




Oil Radiator Washer Banishes Foreign Matter

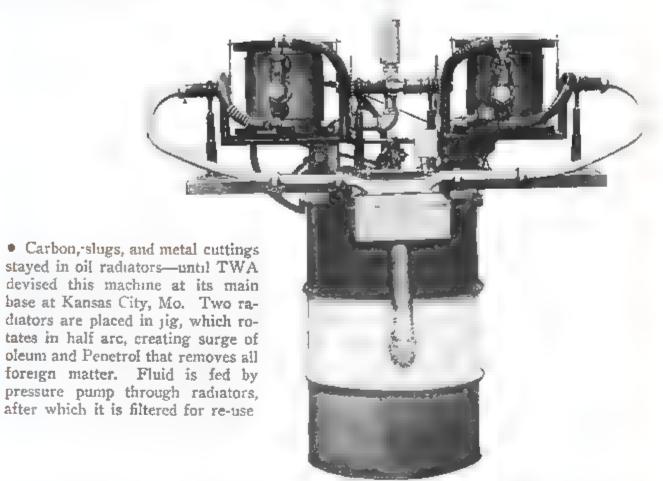



 Sacramento ASC mechanics developed this handy tool for taking out rivets when repairing or salvaging aircraft. Rivet is pressed out with small punch, while flat surface at bottom supports metal as rivet is squeezed through hole in center



How Taps are Saved by Plastic Extension

• By using a Zamak plastic extension between chuck and tap, breakage of taps has been eliminated at Glenn L. Martin. Undue stress breaks neck of Zamak extension, and tap is then cleared by hand without damage to either work or tool. Before adoption of this device, tap losses caused serious bottlenecks in many parts of the plant, further resulting in loss of materials. Device was invented by Supervisors Stull, Lang, and Lapoz of company's Baltimore plant.



Equipped with Timken Bearings in their intake and exhaust valves, four Wright Cyclone Engines have broken all records for sustained performance without overhaul on a Boeing B-17 Flying Fortress. In doing it, they flew 200,000 miles and were aloft more than 47 full days of time. The engines were removed for overhaul only after they had broken the previous sustained performance mark by 59 hours.

"Timken Rocker Arm Bearings were in the intake and exhaust valves of all four engines without change during operation," points out the builders, Wright Aeronautical Corpora-tion of New Jersey.

170

Endurance is not the only quality Timken Roller Bearings impart to aircraft engines. Compactness, light weight, freedom from friction, smooth operation, economy of maintenance - as well as maximum radial and thrust load-carrying capacity are other advantages which enabled this outstanding record to be established.

These indispensable bearing features can help you meet your aircraft requirements. Write us, we'll be glad to make recommendations. The Timken Roller Bearing Company, Canton 6, Ohio,



COMPRESSIBILITY CALLS A CHALLENGE*

PROBLEMS ASSOCIATED with highspeed flight are manifested because air is compressible-and these problems are, in truth, very com-

Compressibility is the term which aeronautical engineers use for a large class of aerodynamic effects associated with high speed. This designation has been adopted because changes which occur in fluid flow at high speeds are chiefly produced by the elasticity or compressibility of the air. If air were an incompressible medium, these effects would not be present. Associated with compressibility is the density of air, which changes rapidly, in turn causing the airflow to change over the surface of the body.

At speeds approaching that of sound -approximately 760 mph. at sea level -the aerodynamicist is confronted with the problem of the airflow changing in character due to rapid changes in density resulting from compressibility properties of the atmosphere.

The practical significance of compressibility effects to aeronautics lies in the fact that the lift and drag of supporting surfaces, the effective operation of control surfaces, and the operation of the propeller with respect to efficiency and capacity, are all affected since the actual fluid is compressible. The lift, drag, and moment of a body are functions of the ratio of speed of the body to the speed of sound at the altitude in question. This ratio is called the Mach number after the Austrian physicist, Ernest Mach, who specialized in the study of high speed pl enomena

A rather abstract appreciation of the foregoing is afforded by a consideration of the elementary forces acting on a fluid particle. For our purposes it suffices to name principle forces,

First, is the well-known D'Alembert force of acceleration This force is proportional to the square of the velocity with which the particle executes its motion, and the mass of the particle. Evidently the force is very small unless the velocity is high, but the force increases very rapidly as the velocity is increased.

Second, is the force of pressure act-

* Based on a paper presented before the Albany Society of Engineers

By COSTAS ERNEST PAPPAS, Chief of Aerodynamics, Republic Aviation Corp.

A clear, concise analysis of basic factors in new but increasingly important problems affecting design and production of highperformance aircraft.

ing differently on opposite sides of the and it disappears when the motion particle. This force serves to balance ceases. Let us agree that viscosity the D'Alembert reaction. It is there- forces are small and may be neglected fore called into being by the motion, within the first order approximation.

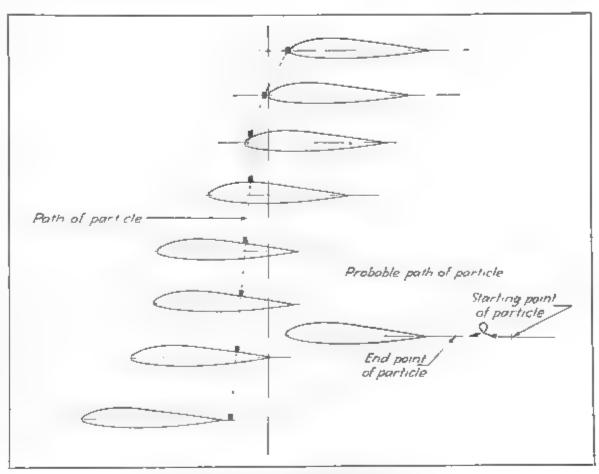


Fig. 1. Diagram showing probable path of air particle over top surface of airfait

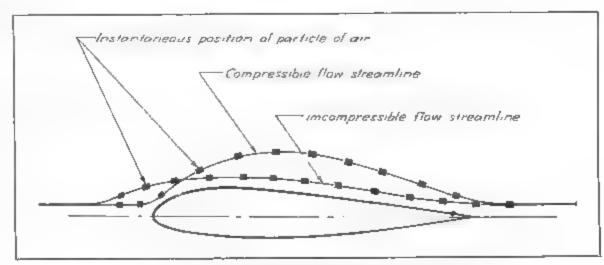


Fig. 2 Comparative position of streamline for compressible and incompressible flow.

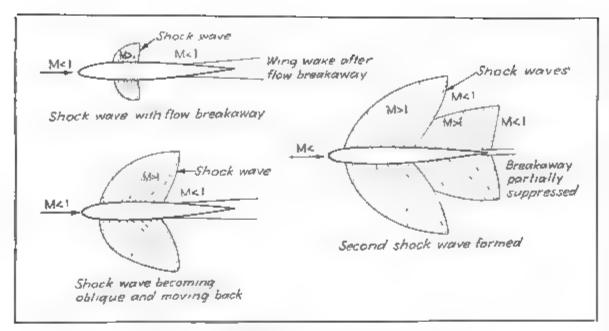


Fig. 3. Illustrations of shock wave patterns for airful as Mach number approaches unity.

Our picture now is of a particle of fluid executing an irregular motion in such a way as to avoid an airful which moves through the region initially occupied by the particle (Figs. 1 and 2). Since the particle is accelerated from rest and follows an irregular path thereafter, a complicated system of inertia forces appears on the moving particle. These forces are balanced by pressure differences which appear between different points of the fluid.

Since inertia forces are small with small accelerations, we expect small pressure differences at low speeds. However, as the speed increases, the a piston in a pipe can be maintained pressure forces required increase according to the square of the velocity. At sufficiently high speed these pressure differences will theoretically exceed atmospheric pressure, and vacnums may appear in the flow. In the case of a comparatively incompressible fluid, such as water, this phenomenon is usually called cavitation

However, with a fluid, such as air, which can expand to fill any space, we find a different situation. Instead of cavitation we find the air becoming

more and more attenuated in the regions of low pressure, Unfortunately for the mathematician the attenuation of the air lessens the density, so that the inertia forces are decreased, in turn decreasing the required pressures. thereby unbalancing the force system, causing the flow to undergo further readjustment, etc. This ends in a headache.

In addition to the expansion of air in regions of low pressure, a second phenomenon occurs at the speed of sound. It can be shown, theoretically, that a steady reciprocating motion of without energy loss so long as the motion is below a certain frequency. Above this frequency, increasing amounts of energy are sent down the pipe in the form of sound waves. Similarly, at low speeds, the steady motion of a body requires no energy input, while at and above the speed of sound energy is continuously radiated outward in the form of a wave. This wave is very similar to the bow wave

However, such waves would be un-

important at present day speeds were it not for the fact that a complicated interaction occurs between the first phenomenon of fluid expansion and the second phenomenon of wave motion. This interaction causes the shock waves which occur approximately midway of the length of the airfoil chord (Fig. 3). An example of very similar occurrence is given by the well-known hydraulic jump in the spillways of dams. Theoretically, little can be said about shock waves, but from a practical aspect they cause much greater headaches than either of the first two phenomena.

The task of estimating compressibility effects from a mathematical viewpoint presents many interrelated difficulties such as:

- (1) Absence of exact mathematical solutions of practical interest.
- (2) Questionable convergence of approximate methods.
- (3) Uncertainty as to the criterion for occurrence of shock waves.
- (4) Considerable inaccuracy of experimental verification.

When mathematical studies are made, a steady adiabatic flow-field of an ideal gas about a two-dimensional body is assumed. When shocks are present, the assumption of irrotationality no longer exists.

Through the demands of structural and aerodynamic design, the interest of airplane manufacturers has become more and more sharply focused on the attempts to find a satisfactory and practicable solution to the problems outlined previously.

Pressure Distributions

We shall start with the diagram of pressure distribution over a wing as obtained from low-speed wind tunnels. The pressures are proportional to the velocity squared.

On this basis then, the higher the

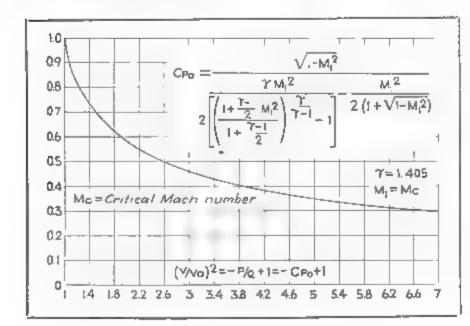


Fig. 4. Graph of airfoil critical velocity vs. maximum pressure coefficient.

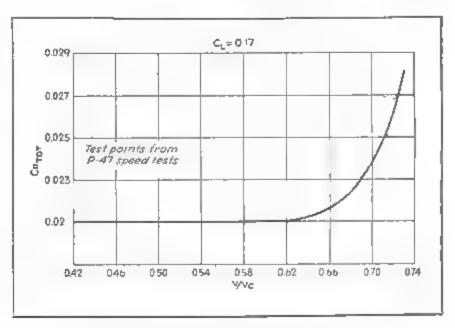


Fig. 5. Apparent variation of total drag coefficient with Mach number.

pressure, the higher will be the local velocity, and as a result, the sooner we will run into trouble. (Fig. 4). This suggests immediately that we should be very careful of curvature. The smaller the curvature, the better will be the flow conditions over the body. Small radu of curvature should be avoided when designing radial engine cowls, airfoil sections, canopy, and fuselage lines. It is important that the fuselage lines be as nearly straight as possible in the vicinity of the wing juncture, since we have superposition of fuselage and wing airflows.

Efforts to determine, theoretically, the influence of the Mach number on the pressure distribut on and total lift of a wing have already been made The answer, although not applicable up to the speed of sound, is relatively simple. The expression determined by Glauert Frandtl is as follows: In crease all ordinates of the airfoil by 1/\sqrt{1-M2} The air forces are then equivalent to those of an incompressible flow acting on the modified pro-

In particular, since angle of attack and camber also increase with the factor 1/V1-M", the lift will increase proportionately to 1/VI-Mi. The drag will increase in degree indicated by the increased angle of attack and especially the increased thickness of the profile. Such conditions apply only in the case of relatively low Mach numbers, for example, up to M=0.6. Thick profiles, however, should be avoided. According to the factor $1/\sqrt{1-M^2}$, we have for M=0.6 (i.e., V=455 mph. at sea level) a profile with 15 percent thickness would correspond to 18.8 percent thickness in an incompressible flow. Such a thickness ratio, however, is known to have appreciably greater profile drag. In order to possess good characteristics, the thickness ratio of a high-speed profile should not exceed 12 percent.

The actual critical effect of compressibility begins at values of M exceeding 0.65 at moderate values of lift of the airfoil. The streamline shape now breaks down completely, and the drag coefficient increases rapidly with increase of the Mach number; for exaniple, between M=0.60 and M=0.75, the drag of a 12 percent symmetrical profile increases tenfold and the lift breaks down.

It is of interest to point out that when the fluid attains the local speed of sound, the airflow does not necessarily break down. In all probability a weak shock wave comes into the picture at this point, which is not too detrimental to the flow. However, as soon as supersonic regions appear, dis-

AVIATION December 1944




Fig. 6. Variation of lift coefficient with critical Mach number at which buffeting occurs.




Fig 7 Comparison of sharp and blust nose

Modified blunt nose aileron




Fig. 8 Graph of maximum load factor encointered in pullout vs. maximum true instrument airspeed.

continuities may occur in which the velocity drops and the pressure rises. over a very small distance.

When the intensity of the shock

wave increases (by intensity we mean the ratio of the pressure ahead of the wave to the pressure behind the wave), rotationality of the field sets in and a turbulent flow region exists behind the wave. These waves extend a finite distance into the free flow and then fade away. The intensity of turbulence increases with the intensity of the shock wave. These compression shocks involve the dissipation of mechanical energy resulting in an increase in entropy. Eventually separation sets in, especially at the higher angles of attack, and at this point the drag increases precipitously (Fig. 5) and the lift decreases rapidly.

With the introduction of separation, the wing circulation is decreased with the resultant loss in CLmer. The turbulent field existing behind the shock wave will cause the tail surfaces to buffet and fast planes will be limited in high speed because of buffeting (Fig. 6). The location of the horizontal tail surfaces is of paramount importance, and it is very difficult to position the horizontal tail so that it will be out of the wing wake, particularly so since the wing wake thickness increases appreciably when rotationality of the field sets in because of the shock wave.

In the case of projectiles, it is wellknown that drag coefficient increases abruptly with approach to the speed of sound. It is now recognized that this is a phenomenon of general application, but that it is more pronounced in the case of airfoils and fuselages than in projectiles, since in the former, the initial drag is proportionately less because of favorable shape for the lower speed range.

The maximum speed of aircraft will probably occur at sea level since the maximum speed of sound occurs there. We can therefore expect a top speed of between 650 to 685 mph, at sea level. This corresponds to M = 0.85 and

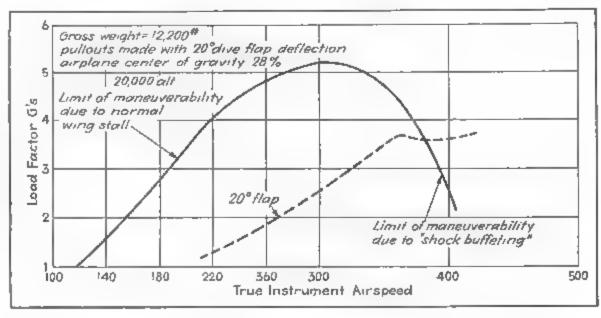


Fig. 9. Valueity acceleration diagram obtainable with dive flap, showing limitation on load factor as a result of compressibility stall.

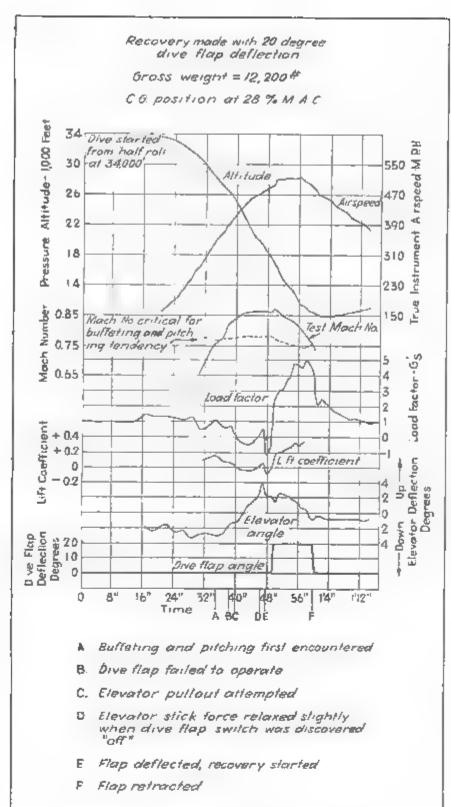


Fig. 10. Time history of .87 Mach number dive.

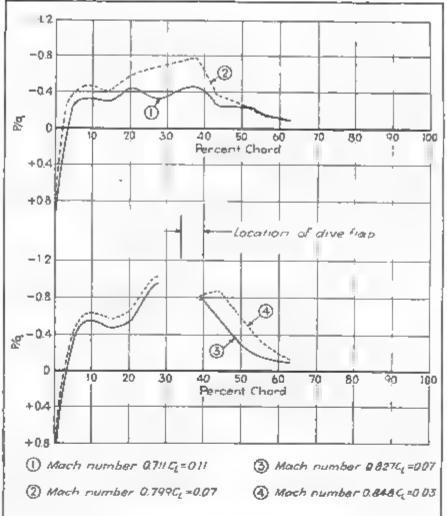


Fig. 11. Varietion of pressure distribution over lower surface during .87 Mach number dive.

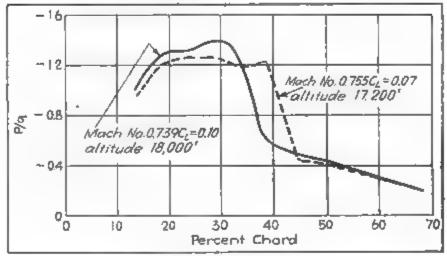


Fig. 12. Variation of pressure distribution over top of wing during dive In which buffeling and pitching tendency was momentarily encountered.

that with further increase in engine power, all types of conventional aircraft will tend to approach the same top speed-650 to 685 mph.

It is interesting that the same phenomenon is observed with ships, it being noteworthy how little the speed of express steamers has increased (Mauretania, built 1909, 70,000 hp .--24 knots; Queen Mary, 1938, 200,000 hp.-31 knots). For ships, also, there are limiting speeds above which the required power increases beyond all proportion. This critical point, at which the resistance rises abruptly, can be raised by increasing the length of the vessel. With aircraft, too, it would therefore be important to discover some In designing high-speed airfoils:

- (1) Move maximum thickness to leading edge.
- (2) Note that when the shock wave occurs, it tends to form opposite the maximum section
- (3) Consider that lenticular sections are best from the point of view of drag at very high speeds, but poor as maximum lift sections.

In the supersonic region, the airful experiences undulatory and frictional resistance. It can be shown that for almost rectilinear supersonic velocities. the body of least undulatory resistance. for a given volume, is bounded by two means of postponing the occurrence of arcs of parabolas symmetrical with the cleanliness, modern high speed planes

M = 0.90, respectively, and it means this critical point in the drag curve. X axis. Furthermore, for a body of minimum resistance, for a given volume, the frictional resistance, when 30-40 percent of the chord aft of the considered, must equal the resistance due to the generation of waves.

Control Surface Design

Before discussing the action of the control surfaces, fuselage, wing, propeller, and engine cowl in high-speed dives, a few remarks will be made regarding the attainment of these dives.

The gross weight of the presentday fast airplane is such as to give wing-loadings of approximately 40-50 lb./sq.ft. This loading is quite high, and in a dive the weight of the plane icts as thrust. Coupled with large wing loading and got acroupt amic

attain very high dive-speeds. It is mevitable that all planes will run into difficulty at speeds approaching that of sound.

Since the Republic P-47 attains a Mach number of 0.85 to 0.90 in dives. it is not surprising that difficulties have been encountered. It is unfortunate that Nature has decreed that the type of flow-pattern changes as we approach the speed of sound. With the establishment of the shock wave, the flow over the wing changes in such a manner as to induce a flow separation.


This results in material increase in the wing wake-of such a magnitude as to envelop the horizontal tail surface. By definition, the wing wake is a region of very turbulent airflow, and because of this turbulence the tail is subjected to buffeting.

We shall enumerate briefly the experiences encountered with the P-47 in high-speed dives and the steps taken in flight tests to overcome the difficulties:

(1) Elevators. During high-speed dives, compressibility has manifested itself through buffeting, increased stick forces, and a decrease in elevator efficiency. Special care should be exercised by the designer with regard to the slot and aerodynamic balance. The leading edge of the balance should not protrude beyond the normal contour of the stabilizer-elevator combination, for if it does, high local speeds will result. causing buffeting, experienced by the pilot as a slight shake of the control stick. From the high-speed aspect, it may be necessary that larger horizontal tail surfaces be used, or an adjustable stabilizer required. Internal sealed balances are highly recommended

- (2) Rudder. The observations applicable to the elevators also apply to the rudder.
- (3) Ailerons. The Frise type aileron used on the P-47 has caused some difficulty at high speeds where the aileron's nose is deflected downward approximately 4 deg. (Fig. 7). At this

Fig. 14. Sketch showing formation of shack wave in region of compression below curved plate airlail at zero incidence in supersonic flow.



Upper surface -0.82 0 -0.4 ģ 60 Percent Chard +04 1)---Republic S3 airfall -NACA 23015 Mach No = 0.770 ec = 2" Mach No. = 0.767 -Cw=/7 +0.8

Fig. 13. Comparison of pressure distributions from wind tunnel and flight test at Mach number critical for buffeting and pitching tendency.

point, the nose protrudes into the free stream and produces a flow breakdown causing the ailerons to buffet. The distribution of forces on the ailerons changes in character so suddenly and to such large degree that the pilot is unable to hold the control stick at a given point. The stick continues to move violently back and forth from one side of the plane to the other. This characteristic is referred to as "aileron snatch."

The original aileron (Frise type) installation had hinges flush with the lower surface. At speeds of 400 mph. and over, a violent oscillatory motion of the ailerons usually occurred. A series of flight tests were conducted to eliminate this condition, the procedure consisting of changing the position of the aileron hinge line.

Best results were obtained by moving the hinge line 1 in. down and 5/16 in, aft, with respect to the original position. The new arrangement did not completely solve the problem but limited the snatch condition to Mach

numbers above 0.8. Further work led to the construction of a blunt nose aileron with a variable mechanical advantage in the control system to reduce stick forces. The blunt nose aileron with the differential control eluminates aileron snatch at high speeds up to 500 mph, and gives greater rolling velocities at all speeds.


Fuselage

As a result of increased tail loads because of compressibility, the structural strength of the fuselage must necessarily increase. Tail loads are increased because of redistribution of forces on the wing, resulting in a dive tendency of the plane in general. Parts of the fuselage such as canopy, ducts, fillets, and doors must be reinforced because of increase in air loads resulting from high speeds.

Special emphasis has been given to the P-47 fuselage design with regard to the contours at the wing juncture in that the fuselage lines are substantially

(Turn to page 423)

Fig. 15. Illustration of shock wave patterns for shorpnosed airful as Mach number increases beyond unity.

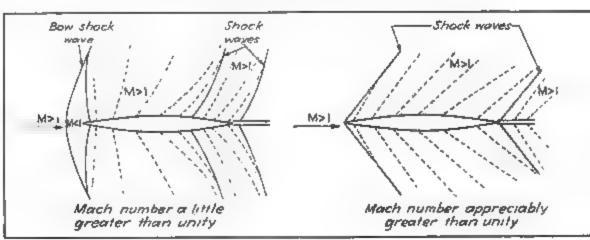

AVIATION, December, 1944

Pre-Viewing Tomorrow's Metal Designs

By CHESTER S. RICKER, Defroit Editor, "Aviation"

With Illustrations by the Author

War Conference display at 26th National Metal Congress and concurrent meetings of five technical societies presage marked design changes and new methods of production and inspection for aircraft industry.


ORE THAN 160 PAPERS and 31 round-table discussions featured the 26th Annual Metal Congress in Cleveland, when the American Society for Metals, the Institute of Metals Div. of the American Institute of Mining & Metallurgical Engineers, the American Welding Society, the Society for Experimental Stress Analysis, and the American Industrial Radium and X-Ray Society held concurrent meetings.


Presentation at the ASM dinner of the Albert Sauveur Achievement Award to Walter Jominy, chief metal lurgist, Dodge Chicago Div., Chrysler Corp., indicates the importance of his contribution to both steel makers and users. Every steel man oueried reported that the setting of hardenability bands as determined by the end-quench hardenability tests bearing his name are going to take this test out of the laboratory onto the factory floor. It Aircraft Welding by P. H. Merriman

will help the steel maker dispose of slightly off-chemical analysis heats. make more steel available from various sources and thus speed production and assist procurement departments.

Outstanding features of the exhibits of more than 400 firms, plus the special papers, concerned induction heating: announcement of new aluminum and steel alloys, new developments in selection and inspection of materials, methods and dynamic results of shot peening, powdered metallurgy developments, and new welding techniques.

The American Welding Society held two sessions on aircraft welding at which the following papers were presented: Impact Strength of Arc Welded Joints in Aircraft Steel by H. O. Klinke, Republic Aviation Corp., Helium Shielded Arc Welding of Exhaust Collector Rings by F. H. Stevenson of Lockheed: Multi-Arc Welding of Aluminum Alloys by M. R. Rivenburgh and C. W. Steward of Curtiss-Wright; Geometry of a Spot Welding Tip and Its Relation to Tip Life by E. D. Crawford and C. W. Steward of Curtiss-Wright: Survey of Chemical Cleaning Practices for Spot Welding Aluminum Alloys by F. M. Morris, Kaiser Cargo Inc., Fleetwings Div., An Evaluation of Process Control of

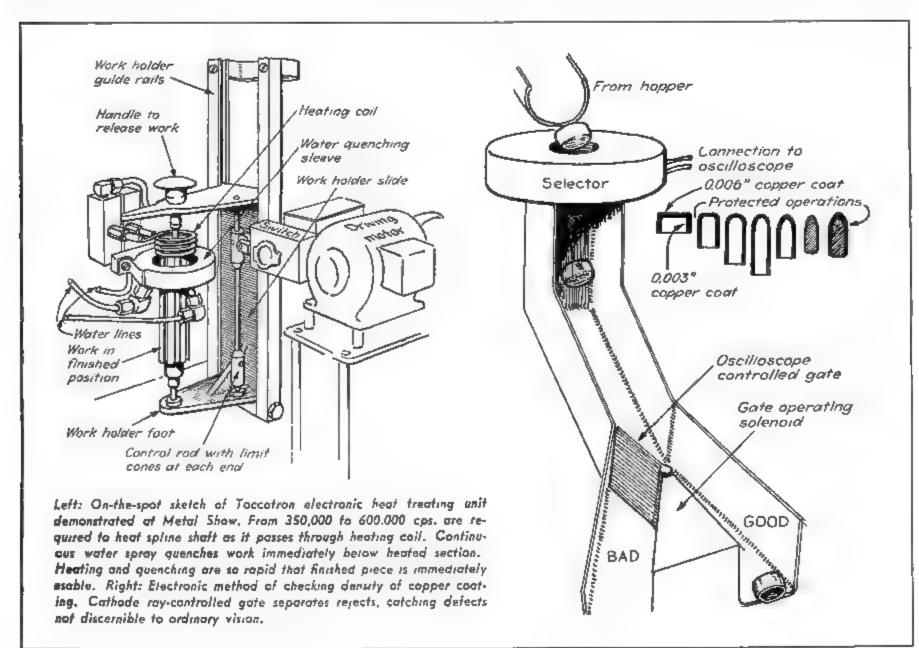

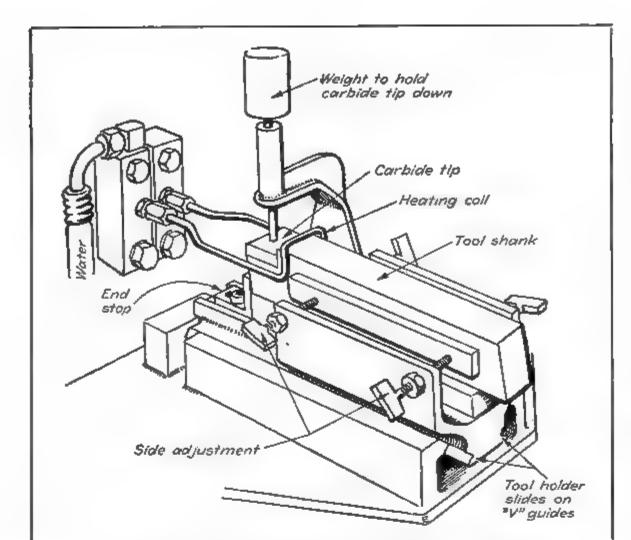


Latest electric heating unit developed by Ohio Crankshaft Co. has 7.5 km. capacity at 9,600 cps, and is used for brazing carbide tips on tools.

of Glenn L. Martin; and Characterisuses of Welding Arcs on Aluminum in Atmospheres of Helium and Argon by E. A. Wassel of General Electric.

New aluminum alloys presented at the congress were Aluminum Co. of America's 75-ST and Reynolds Metals' R-303. Alcoa's 75-ST has from 25 to 50 percent higher yield point than similarly treated Alclad 24-ST and 24-SRT. The company reported the new alloy is now available in extrusions and Alclad sheet and, in limited sizes, in tubing, bars, and plates.

Test sample and characteristic curve which can be plotted from it after making Rockwell hardness test. From this curve, hardness at any depth in similar steel can be estimated, as well as TS, YP, Elong. in 2-in., and percent Red, of area.




In the strength of materials roundtable discussion, S. A. Gordon, chief test engineer of Glenn L. Martin, reported that in one case a 16-percent gross weight increase reduced takeoff speed by 6 percent; increased landing speed 8 percent; reduced range 17.5 percent; cut rate of climb 25 percent; and lowered top speed 6 percent. For greatest structural strength per pound. he advocated the shortest possible piece of material, deep rather than shallow beams, use of tension rather than compression members, combining two members wherever possible, elimination of all possible joints and splices, use of extrusions instead of forgings, and clevice bolts. On one airplane, he reported, 300 lb. had been saved through redesigning of fasteners. Additional weight savings can be made, he said, through use of heat treated glass in place of plate, and space fillers of wood or plastic.

At this same meeting, Horace C. Knerr, reporting on possibilities of steel in aircraft, gave the following comparisons of yield strength to specific gravity:


Music wire	. 400,000/7.8	3 51
	35 000/1 3	3 19
Alum. alloy	. 52,000/23	
Heat treated steel	150,000/7.	8 19
Spruce	4,800/0	43 10
Оак	5,900/0	74 8
Steel	55,000/7	85 7
Cast alumnum	12,000/2.	7 4.4

Savings of over \$5,000,000 in labor costs through powdered metallurgy

were reported by A. J. Langhammer, president Chrysler Corp's. Amplex Div., who said the process made possible production of vitally needed gear dies within a few weeks and the completed gears in 90 days. There were not enough machines in the country, he said, to turn out the required quantities by machining from the solid. In another case, hand wheels for guns (Turn to page 259)

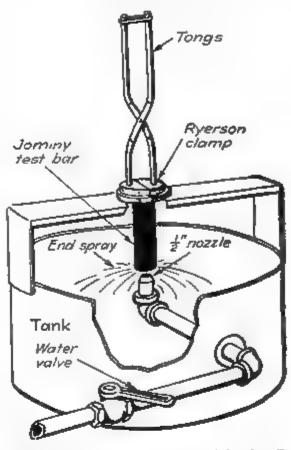

Jaminy test unit as demonstrated by Jas. 7. Ryerson & Sons. Note simple tangs which hold sample during test. This eliminates turning shoulder on piece and allows tests to be made with standard 1-in. bars.

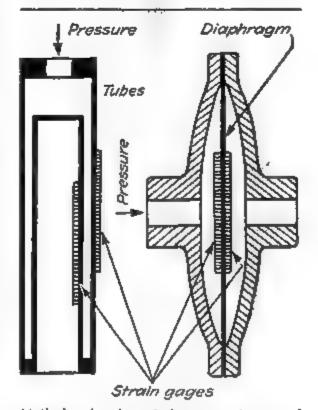

Methods of using strain gages to record pressure, as exemplified to paper on "New Approaches to Engineering Design," by Stilson, Peterson, and Pocock of Bendix Aviation Corp. Strain gages on two tubes, one under tension, other under compression, are on apposite sides of diaphroam,

Heavy Duty Runway **Built by New Techniques**

By RHODES E. RULE, Consulting Engineer, and JOHN F. L. BATE, Project Construction Engineer

Designed to take any weight plane now contemplated, new 8,500-ft. runway and taxi lanes built by Convair and Navy at San Diego point way to future large airport construction.

TMPROVEMENT OF THE MUNICIPALLY owned airport at Lindbergh Field, emergency undertaking financed by Consolidated Vultee Aircraft Corp. and the Navy Department Bureau of Aeronautics, will this month provide one of the finest prevailing-wind runways in the United States.

Construction has given the field a runway 200 ft. in width and 8,500 ft. San Diego, Calif., as a joint war long. It consists of a Portland cement concrete slab of uniform 12-in, thickness, except at the east end where a 14-in, thickness provides for additional vibration loads in the warm-up area. The taxi lanes are 75 ft. in width, and they are of the same thickness as the

runway. These lanes are parallel to the runway for its entire length, Separating the runway and taxi lanes is a strip 225 ft. in width, divided into a series of flat catchment basins for temporary impounding of waters during extreme storms.


This intermediate paved area is constructed of asphaltic concrete from 3 to 5 in, thick. Similar paving has been specified for the shoulders, which are 50 ft. wide adjacent to the runway and 25 ft, wide next to the taxi lanes. This gives a total paved width of 575 ft. for the entire length of 8,500 ft.

The new runway and the existing north-south runway are being completely lighted with the most modern ACN flush-type lights, and a complete system of obstacle lights is included at ends of both runways.

Construction of the runway provided many difficult problems in both engineering and construction. Because the field lies entirely on made land dredged from the adjacent bay bottom, careful consideration had to be given to the design of the foundations. A thorough sub-surface investigation preceded the design. Tests were made to determine the nature and supporting value of the various materials in place, and of the nearby deposits of sand and gravel available for making the necessary fill

Pouring concrete strip of 75-ft.-wide taxi strip parallel to new 8,500-ft. tunway. In foreground are two 11/2-cu. yd. capacity povers, followed by spreader, internal slab vibrator, joint cutter finishing machine, and hand finishing bridge.

Diagram of new 8,500-ft. runway, designed for planes weighing up to 170,000 lb. grass, just being completed by Convair and Navy Bureau of Aeronautics at Lindbergh Field, San Diego. New runway is more than twice length of original runway, shown by dotted lines.



and compacted sub-base, upon which the finishing paving rests.

Based on these investigations and conclusions, approximately 500,000 cu.yd. of unsuitable plastic material will have been removed upon completion of the work and replaced by selected materials of a demonstrated supporting value. The replacement materials include pit run gravel and sand used in the base of the fill, a selected sand base above the common fill, and crusher-run gravel which lies immediately below and forms the sub-base upon which the pavement rests. All of these materials are required to meet rigid physical acceptance tests to assure that their supporting value will equal or exceed the design computations.

Design of the foundation and pavement assumed an 85,000-lb, wheel load. Results achieved during construction indicate that this may safely be increased to 175,000 lb. per wheel, which is ample for accommodating the heaviest types of airplanes now contemplated.

Great care and consideration were given to the preparation of the subbase. At the west end of the project, which extended into unfilled tidal flats, a system of well points was installed and pumped until placement of that portion of the embankment had been completed in order to make certain of a preliminary settlement of the subsoils below the fill area. Settlement of 0.61 ft. maximum was recorded, with an average over the entire area of 0.21 ft. These de-watering operations provided a consolidation of the subsoils in this area, thereby making them equivalent in supporting value to the subsoils under the existing fill area of the tidal

Earthwork is being accomplished by dragline excavation and truck haul to waste disposal areas and by carryalls where the excavated material is suitable for re-use in the embankment.

Imported borrow of selected material is hauled in by truck from two separate pits about 5 mi. from the field. This material is placed in 9-in. lifts, compacting to 6 in. Field density determinations are made frequently to check compaction, which was specified to be

(Turn to page 260)

Here are men who directed job, which involved many problems due both to heavy weights of planes anticipated and fact that runway was constructed on made land. Left to right: Rhodes Rule, consulting engineer; J. F. L. Bote, Convair field enginear in charge of construction; Phil Halsey, Smith-Emery Testing Laboratories; L. G. Lynch, project manager; L. G. Krull, general superintendent; and R. L. Hapgood. concrete superintendent.



New Lindbergh Field runway is designed to handle planes of any weight now contemplated, and specifications—first such written—called for complete full depth internal vibration of concrete slabs. Electrically-operated elements, shown at work here, vibrate at 10,000 cpm.




Shoulders, which are 50-ft, wide adjacent to runways and 25-ft, wide next to taxi lanes, are of asphalt-concrete material. Similar material, though of less thickness, is used in intermediate areas giving total paved width of 575 ff, for entire runway length,



AVIATION, December, 1944


PLANT-PRACTICE **HIGHLIGHTS**






Simplified Method For Cutting Magnesium

• This idea for cutting magesium sheet calls for scribing to dimensions, then placing in power brake with scratch on lower side of sheet directly beneath edge of brake. Sheet breaks exactly on scribed line and very little filing is required to smooth it down. Pictured is Stanley Carrol, of Northrop, who developed method.

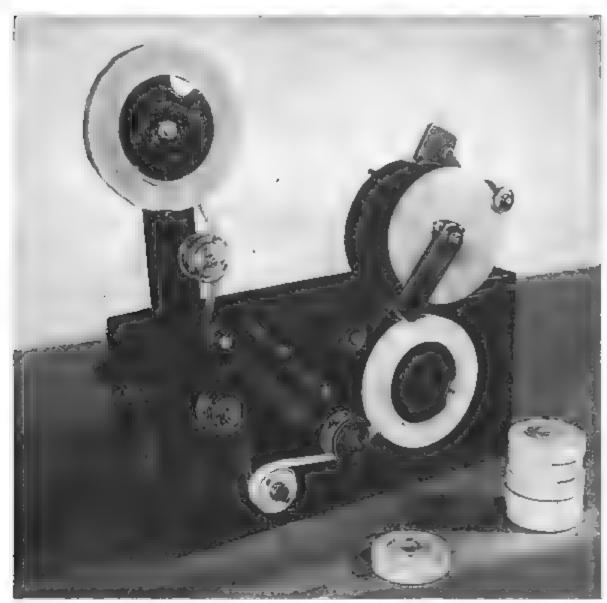

Skin-Hanging Device


 Using round steel bars as hangers for sheet metal wing skin, Curtiss-Wright has provided an economical quicklyadjusted means for holding these odd shaped pieces while riveting them to frame of airplane. Inexpensive bars are rugged enough to stand considerable rough use before being scrapped.

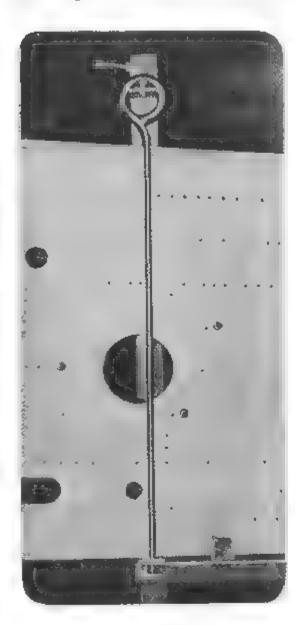


Identification Tape Made to Order

· Glenn L. Martin's electrical department uses this machine to print proper identification tapes for hundreds of wires used in large aircraft electrical and instrument systems. Machine, fitted with type on a roller, prints tape as required, thus eliminating necessity for carrying large stocks of material which might not always be what was required at the time. Through use of this machine, tape-shortage headaches have been eliminated, since any number or series of numbers may be turned out at short notice.

Boeing's Model 377 Stratocruiser

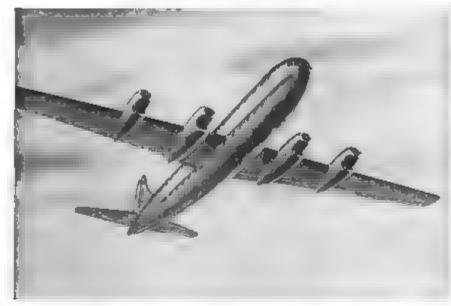

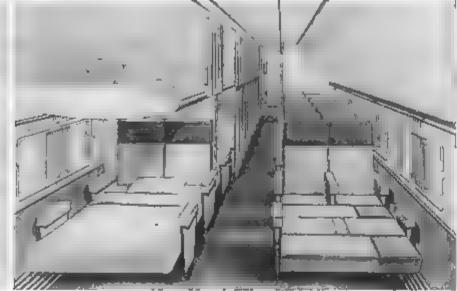

Artist's flight view of Boeing 377 Stratocruiser reveals ship to have similar silhouette to that of 8-29 Superfortress, Airfoil is same-Baeing "117." However, Model 377 is 12 ft. longer and leatures two-deck inverted-figure-8 fuselage.

View of upper cabin interior shows how seats are made up into berths. At right, lorward seat has been dropped in initial phase of change, while at left is seen completed lower berth with upper berth also dropped into place.


EWEST OF BIG-TIME contenders aiming for the postwar airtraffic crown is the Model 377 Stratocruiser, announced by the Boeing Aircraft Co. as a four-engine lowsenger transport. Capacity of the plane is put at 72 to 100 passengers, while range is estimated at 3,500 mi., and cruising speed is specified as 340 mph. with a potential in top speed of 400

Stated to be an outgrowth of the company's noted B 29 Superfortress bomber, a prototype of the craft already has been completed and test flown an a military version which, when hostilities are ended, will translate into the postwar ship. All present models built will be employed in war service.


A day-transport version would afford the 100-passenger capacity by utilizing three cabins, while 72 would be carried by day in a sleeper version, or 36 with berth accommodations by wing two-deck pressurized-cabin pas- night, with an additional capacity for 14 patrons in a lower-deck observation

> A third version of the craft would be an all-cargo transport carrying 35,000 (Turn to page 272)

This cutoway offers details of two-deck inverted-8 structure. Top portion shows seats which are convertible into berths, while below are appointments of combination observation, dining, and cocktail lounge, reached by circular stairway. All cabins are to be pressurized for comfortable over-weather flying.

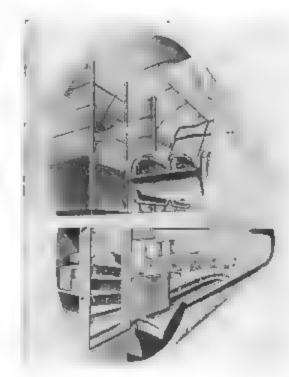

Sectional drawing of luxury sleeper version indicates comprehensive accommodations planned for plane. In main cabin, two berth sections are depicted made up. Observation lounge would "double" as dining salan. Sleeper would carry 72 passengers by day, sleep 36 by night.

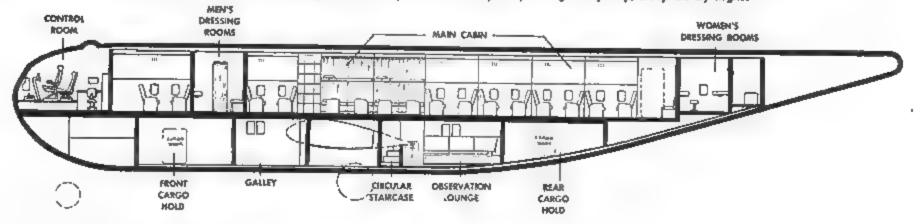

AVIATION, December, 1944

AVIATION, December, 1944

REPUBLIC PRESENTS PERSONAL AMPHIBIAN

Producers of P-47 Thunderbolt are developing four-place craft for postwar market—175-hp. pusher designed to sell below \$4,000.

EPUBLIC AVIATION CORP. is entering the personal plane field with a single-engine four-place am-

prototype designed and built by P. H.

In its present stage, the craft is a phibian now being developed from a high wing metal monoplane with fabric

Artist's conception of Thunderbalt amphibian being developed by Republic Aviation Corp. for postwar personal plane market. Powered with 175-hp. 6 cyl. horizonfally apposed engine, craft is designed to have top speed of 120 mph., cruising speed of 105, and landing speed of approxi-


covered control surfaces fitted with single-strut wing tip floats and embodying a 6-cyl,-opposed pusher engine fitted in the trailing edge of the wing at the top of the cabin. Empennage and tail wheel are mounted on a slender fuselage running aft of the cabin under the propeller. Slotted flaps will give landing speed of approximately

Pilot's seat is located forward of the leading edge, permitting extensive use of transparent sections to give maximum visibility. Cabin is slated to have luxurious appointments.

Although the list price has not yet been finally determined, Republic officials state that this Thunderbolt amphibian will probably sell for less than

Preliminary Specifications and Data

Span	36 ft
Length	26 (t. 6 m.
Height (on wheels) Water draft (fully loaded,	8 ft 7 in.
Water draft (fully loaded,	17 in
Gross wt .	2 600 lb.
Max speed ,	120 mph
Cruising speed	105 mph.
Landing speed (approx.)	50 mph.
Crusing range	over 500 mi
Power (tentative)	175 hp.

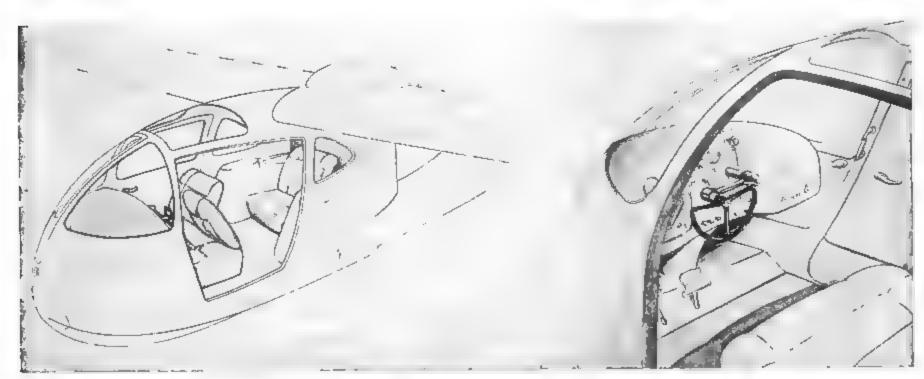

With two of four seats set well ahead of wing leading edge, cabin is designed for extensive use of transparent sections to give maximum visibility. Hull design is such that, fully loaded, craft will draw but 17 in of water.

Although Republic plans luxurious interiors in new personal amphibian, design-for-production features are expected to bring craft's price tag under \$4,000.

N ADDITIONAL BRITISH CONTENDER in the postwar transport plane field is the Handley Page Hermes, on which some details have just been released, and the prototype of which will soon reach flight-test

An all metal, stressed skin, low-wing, four-engine monoplane bearing a great profile resemblance to the Douglas C-54, the Hermes will be built in two versions: As a passenger liner carrying up to 50 passengers on short flights; and as a cargo transport carrying up to 16,000 lb. on a 70,000-lb. gross weight basis.

In the passenger version, provision will be made for cabin pressurization to permit flights up to 25,000 ft. altitude. Alternate passenger layouts are being designed for varying routes. One version calls for seating of 34 passengers for day travel, and another de luxe version featuring a club saloon, would seat 20, while for shorter trips, provision could be made for 50 passengers. Still another version provides accommodations for 32 passengers by day, with seats convertible into berths for 16 passengers.

All versions call for a crew of six, comprised of two pilots, a flight engineer, a radio operator, an avigator and one or more stewards

(Turn to page 265)

Specifications and Performance Data 113 ft 81 ft 8 m. 31 ft Up to 50


Passengers, day
Passengers, night.
Cargo
Maxmum speed
Maxmum cruising speed 16 000 lb 340 mph. 289 mph momical crusing speed Puel capacity . Maximum range, .

Handley Page Bid For Transport Market

Four-engine Hermes transport carrying up to 50 day passengers, or, in cargo version, up to 16,000 lb., nears flight tests.



Artist's conception of Handley Page Hermes tour-engine transport, prototype of which is scheduled for initial flights in near future. Powered by four 1,600-hp. Bristol Hercules sleevevalve engines. Hermes is designed for top speed of 340 mph, and minimum range of 2,000 mi. (Samson Clark chotos)

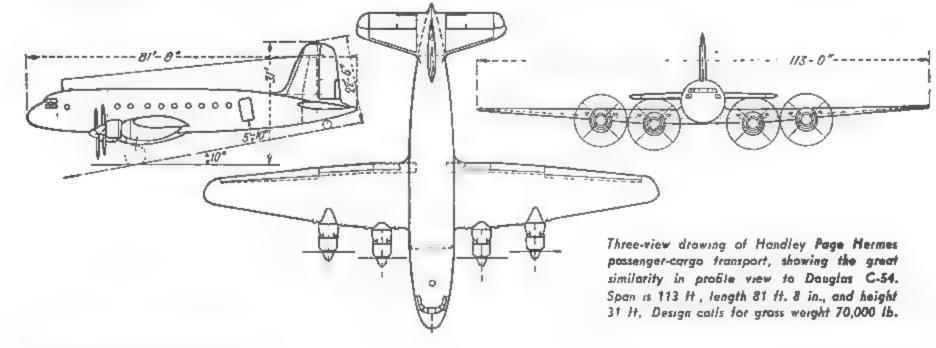

Discussing the information required for determining range and cost estimates, and citing the need for basic test-flight figures and derivative charts, the author declares that makers of transport craft should —


GIVE OPERATORS MORE CRUISE-CONTROL DATA

By JAMES B. REA, Engineering Test Pilot, Consolidated Vultee Aircraft Corp.

larger aircraft, the problem of establishing an accurate and economically sound cruise-control technique has become extremely important. When one considers the economics of operating large transport planes over long distances, it becomes evident that competing commercial operators will, of necessity, have to be well-grounded in the technique of cruise-control if they intend to stay in business after the war.

It is realized by most airline operators that fuel cost alone is not the major portion of total operating costs. Other costs such as airplane and engine depreciation, overhaul, repair, and ground service; crew pay, insurance, and expense; airplane public liability, property damage, and acci-

Fig. 1. Speed-power chart, based on "iw" parameters.

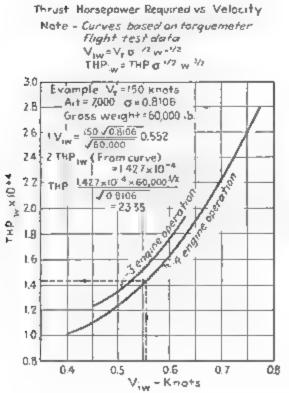

dent insurance; and interest on investment, etc., are but a few of the major costs tending to overshadow fuel costs.

But even though cost of fuel may be relatively low, it must be remembered that it is the equivalent cost, resulting from payload displaced by fuel, which greatly affects the economic picture when considered from the aspect of dollars per ton-mile

In the past it has been the practice for commercial operators to determine for themselves, by actual flight test, the basic information required to set up a cruise-control technique. But with the growth of large aircraft, the operator must depend more and more on the manufacturer to supply basic informa-

tion. The operator has neither the time, the test equipment, nor the engineering flight-test personnel required for such extensive and costly tests. For this reason, most of the aircraft manufacturers have become cruise-control conscious, especially from the flight-test point of view.


Individual operators have their own particular techniques for cruise-control. Some prefer to fly at constant indicated airspeed, some at constant brake-horsepower, some at maximum-range speeds, and others at airspeeds of constant amount, or percent, higher than maximum-range speeds.

It is normally not the policy of the manufacturer to recommend that the operator use any particular method of cruise-control, but it is essential that he supply the operator with basic

Fig. 2a. Moster fuel-flow chart.

Cruising Control Fuel Consumption (Two Stage Two Speed Impelers)

F xed Carburetor Setting Based Upon Torquemeter Flight Test Data

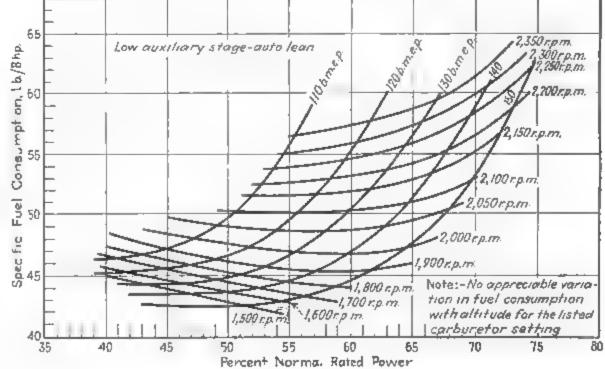

Based on Torquemeter Data Obtained from Test Airp anes Incorporating the use of Main Stage Impeller only




Fig. 2b. Typical manifold pressure—pressure altitude chart for constant breep.

flight-test data and derivative cruisecontrol charts, so that the relative economies of the various techniques may be judged.


The Air Transport Association has recently established a standard form to be used by all mammac areas when presenting basic operations and crass-control information to commercial allines. It is hoped that in the tuture almanufacturers will follow this form.

The basic engineering data required for determining range and cost information for various critise-control techniques are:

- 1. Speed power characteristics.
- 2. Engir e character stres
- a. Fuel consumption information.
- Manifold pressure --pressure altitude calibration for constant bmep.
- 3. Propeller characteristics.

Fig 1 shows a speed-power chart based upon "in" parameters. This method of showing speed-power allows one curve to represent the speed power data for all operational gross weights and altitudes

Fig. 2a shows a master ruel-flow chart. This type of chart has an ad-



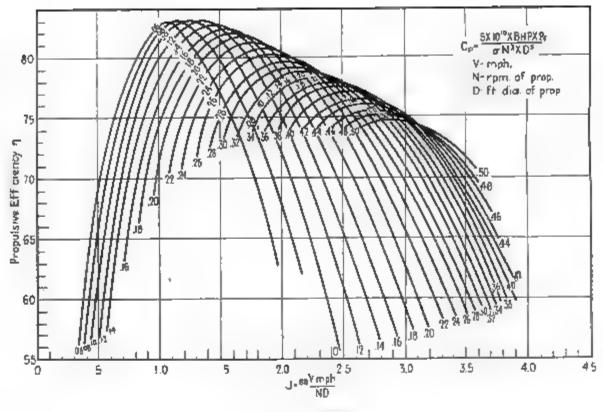


Fig. 3. Propeller efficiency chart.

Fig. 4. Curves of fuel-flow, in Ib./hr./engine vs. true speed.

Maximum auto-lean cruise power,

Maximum gross weight line a-b Locus of maximum range points () Figine Locus of maximum safe cruising C.= Locus of maximum per endurance points-퍞 Consumption-Lb. Gross WT. Fuel empty Density altitude constant = p (Auto-lean carburetor setting) True Speed - Mi. per Hr. -Headwind

component

- 1. All points computed for $(\frac{\eta}{c})$ max, with $BMER_{max}$. limitation due to engine wear considerations.
- 2. Horizontal lines represent constant BHR operation.
- 3. Vertical lines represent constant speed operation.
- 4 Tangent lines from origin determine maximum range points.
- -5. Shaded quadrilateral a-b-c-d represents autolean operations range.

When You're Planning Payloads—

it's necessary to consider a great number of elements which disturb Right economy. Presented here is a conservative fuel-weight evaluation of these important payload factors as encountered in a theoretical long-range hop.

By JAMES J. HEATLEY, Operations Engineer, American Export Airlines

·N FORECASTING the results of any newly proposed airline operation, a Ltrial balance must be set up for anticipated costs and revenues. In developing these expected revenues, we have, first, our estimated traffic potential which, with the type of operation proposed, should determine the type of aircraft most suited and the frequency of schedules.

Payload available is the fundamental consideration in beginning the revenue study. It will vary with the distance to be flown, the route chosen, the season of the year and, last but not least, the pilot technique.

Let us conservatively evaluate these items on a theoretical approximate 3,000-mi, flight and see, quantitively, how much they cost in payload. To make this trip interesting, we will select the North Atlantic during the winter and a Great Circle track from New York to Southampton,

The accompanying chart illustrates a vertical cross-section of weather conditions en route. The dash line indicates the path of the plane initially cleared at 8,000 ft., with light icing forecast at the higher altitudes and the 0 deg. C. isotherm low and passing through cloud layers. The captain has selected the higher altitude as most conducive to safe flight on the theory that it is better to have altitude under light icing conditions than a low altitude with probable icing of unknown

Operating over such a distance, a long-range cruising technique will be employed. This offers a relatively slow airspeed and an angle of attack somewhat short of that for maximum L/D. Fundamentally, this technique is designed around airspeed as the primary control, so that shall be the one variable to which we must closely ad-

Turbulence


In 3,000 mi, we may expect approximately 5 hr. moderate turbulence at 8,000 ft. Turbulence will vary with frontal activity. Because of our high trim angle, this turbulence will drop us about 8 knots in airspeed for 5 hr.

To retain our prescribed speed we must increase power to regain that 8 knots-increase it by some 60 hp. on the basis of airspeed varying as the cube of the hp. At ,43 specific fuel consumption, we lose 129 lb. of fuel to this turbulence.

Intentional Deviations From Track

In a long-range flight, circumstances will normally arise that will require a deviation from the prescribed track as planned. A thunderhead or large cumulus might lie directly in the path of flight. Perhaps the avigator may require double drifts or may wish to change course to check compass heading deviation. Nowadays, moreover, convoys must be skirted and enemy aircraft and surface craft avoided on ocean flights. Eliminating wartime circumstances, an allowance of at least 30 extra miles should be expected for these intentional deviations.

The flight path through the frontal activity pictured in the chart may be considered as an example. Between (A) and (B), the cross-section portrays a considerable amount of high cumulus cloud. Rather than being solid, as may be interpreted by those unfamiliar with the cross-section type of chart, these clouds are usually (Turn to page 297)

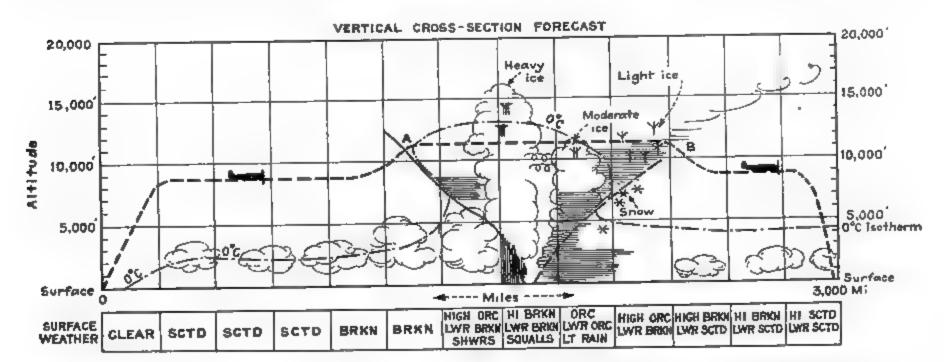

Typical cross-section of weather encountered in 3,000-mi, transocean flight. Captain of plane must continually evaluate disturbing factors

of avigational facilities, turbulence, rain, and icing in relation to "miles made good" and "remaining fuel".

HE FOUR-YEAR BEAR MARKET ID aircraft stocks is over. Even Wall Street begins to feel that here is an industry with peacetime growth prospects-a possibility that was somehow overlooked when prices of leading stocks were carried down to only 40 percent of their previous

What are the reasons for this sudden about face? In the first place, Wall Street began to prick up its ears when three airlines ordered \$50,000,000 worth of transports on a when-as basis. These orders have continued to trickle in until the commercial transport backlog of three companies-Douglas, Lockheed, and Curtiss-Wright-total more than \$230,000,000.

This advance backlog of unfilled orders is larger than the entire industry's sales of \$225,000,000 in 1939; the year the British, French, and Dutch were taking delivery on all the American planes they could find.

Besides the more than 200 transports on order or under negotiation, another 100 transports were under active consideration when this was written. That, of course, does not count the potential orders for the monster transports now on the drawing boards that won't be in profitable production until 1948 or so.

Then there is the foreign market. It will be years before any other nation in the world can produce transports at home. Already foreign airline officials are vieing with each other to "line up" American planes for use on the world's airways as soon as they can be opened for peacetime traffic.

Thus there is little wonder that Wall Street recently purchased aircraft stocks in such volume that prices rose nearly 50 percent from their 1943 lows. But there are other reasons why the bear market is over. For one thing there is scarcely any talk these days about the continued solvency of the industry after the war.

The industry admittedly put its worst foot forward in order to get Congressional action on the huge problems involved in shrinking the nation's largest wartime industry back to its normal size. The problems have been faced by a sympathetic Congress and by military officials dealing with reconversion, so there is now less tension on that score. Granted, there still are plenty of problems ahead, but the public hears less about them.

As just one example of how the reconversion picture has changed for the

Aircraft Stocks Climb Out of Bear Pit

By RAYMOND L. HOADLEY, Financial Editor, "Aviation"

Airline orders, coupled with confidence in postwar designs shown by personal plane producers, finally give Wall Street the beliefalong with industry itself—that aviation is here to stay.

better in the last few months, the government will permit plane makers to sell company-owned materials to the United States for \$1 and use the inventory loss for tax purposes. Then, too, the industry really benefits from the so-called relief provisions in the present tax law. The industry can obtain a tax refund by charging any reconversion losses against two years of wartime earnings.

Turning now to current operations, it appears that 1944 earnings will, on the average, be fairly close to the satisfactory showing made throughout the industry last year. True, results may be a bit more spotty, but the fact is that cutbacks in production have not come through in sufficient volume to have the reverse effect feared early in the

Meanwhile, the plane makers are

balance sheets, marked a decided improvement over the strained position many companies revealed at the end of 1942. This year, further long strides will be made towards a highly satisfactory financial position.

For example, Consolidated Vultee is reported in well informed circles to have added about \$10 a share to its total net resources in the last twelve months, bringing that figure to around \$33 a share. Douglas Aircraft is believed to have around \$80 a share in net current assets, against about \$60 a share a year ago.

Pointing out that the present price level for aircraft stocks was a realistic one, a prominent brokerage firm recently noted that leading stocks were selling at only slightly more than their

(Turn to page 262)




REPAIRING 'ROUND THE WORLD

Mobile self-contained ATSC Service Group works way to China through nine countries, keeping everything from fighters to cargo planes fit enroute.



India was just a stop-over for "mechanicommandos" as they repaired combat craft over route from U.S. through nine countries to China. Here they overhaul a C-46 Commando, one of cargo planes which moved outlit over Hump. (CBI ATSC photos.)

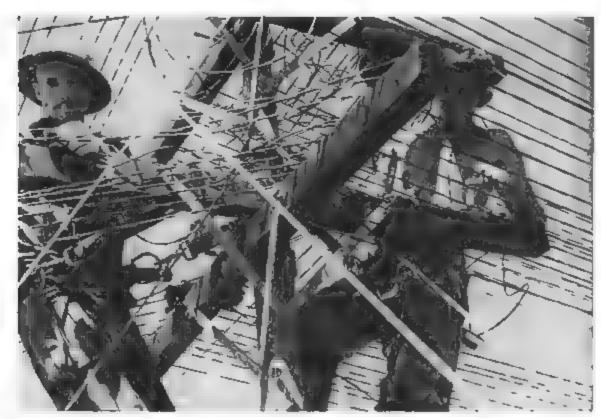

ATSC mechanicommando Service Group is self-contained mobile unit doing all kinds of work for Air Force units, from cooking to financing. These signal men are attached to group repair communications of present China base.

DEEP IN CHINA TODAY there is an ATSC Service Group which finally found good bedding and table crockery the hard way.

Commanded by Col. Paul A. Cunyus, the outfit started for the wars in the summer of 1942, repairing and rebuilding combat planes three-quarters of the way around the world through nine countries, but seldom seeing real beds or much of anything in the way of food but C and K rations

China, their latest but possibly not last stop, was reached last spring when they were ordered over the Hump by Maj. Gen. T. J. Hanley, Jr., commanding the then Air Service Command in CBI, to apply their battle experience to fighter squadrons of Maj. Gen. Chennault's 14th Air Force.

A Service Group of the ATSC is actually a task force of airplane supply and maintenance, geared to be mobile and self-sustaining. Along with the basic squadrons of repair and supply, a Service Group has what are known as "attached arms and services"—companies and squadrons of Ordnance, Quartermaster, and Signal Corps, and detachment personnel of Finance, Chemical Warfare, Chaplain, and Special Service units.

The log of Col. Cunyus' "mechanicommandos" discloses how this wellkint junior army of ATSC operates to help not only the individual tactical air squadrons of the AAF, but functions at times in the manner of a complete housekeeping force for the entire Air Forces or Sector Command with which it is currently affiliated.

The China-ward trek started from an Atlantic Seaboard port of embarkation, touched at South America and South Africa, and disembarked for the first of many stops at Suez just as Field Marshal (then General) Sir Bernard Montgomery was pressing the button for the battle of El Alamein and the rout of Marshal Rommel's Afrika Korps.

The men lived in English-type tents and ate English rations in Egypt. None of their equipment had arrived from the United States, hence they were forced to borrow and beg tools (Continued on page 193)

MORTHROP P-61 "BLACK WIDOW"


ever flown, the Northrop Black Widow was built to attack the enemy by night! But she is also being used successfully in daytime combat operations. She's fast, she's deadly, she's different' Her two-or three-man crew put her through the most difficult maneuvers with the greatest of ease ... operate the heaviest fighter plane armament in the world ... and bring her in to land at remarkably low speed for such a heavy, fast airplane.

Many B. F. Goodrich products are now

flying on all fronts with the Black Widow. . and with other winning warplanes all over the world. Silvertown Tires, Delicers, Bullet-Sealing Fuel Cells, and Expander Tube Brakes are helping to get our fliers off and back!

To the Black Widow now making headlines . . . and to her maker, Northrop Aircraft, Inc , B. F. Goodrich tenders a well earned salute—our nomination of the Black Widow as "Plane of the Month."



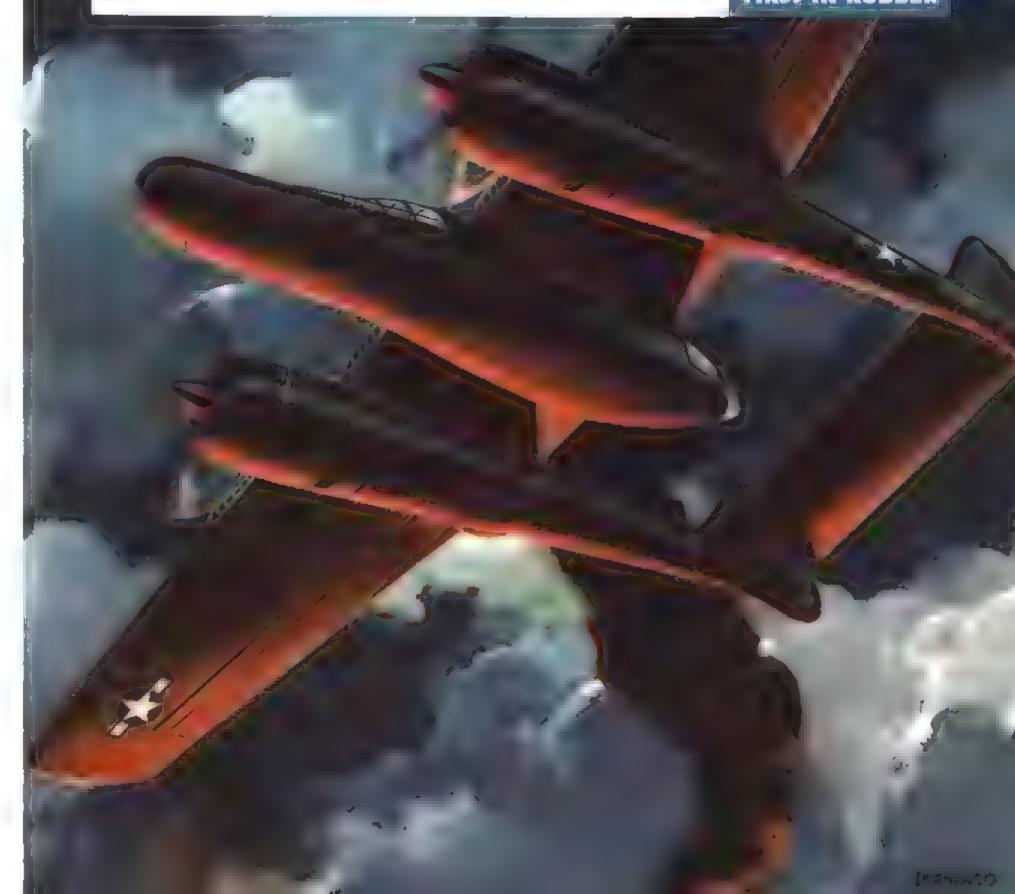

NEW DE-ICER PASSES HIGH-SPEED TEST!

B. F. Goodrich Type Eleven operates successfully on fast fighters!

> OR MORE THAN A YEAR this new De-I Icer has been under test for ice-removal efficiency . . . for service life . . . for performance at high speeds. The latter test resulted in the approval of Type 11 De-Icers for use on fighter aircraft!

The Army wanted proof that these De-

Icers would stand up under the terrific speed strain-proof that De-Icers would be practical for fighters. A recent test gave them the answer.

One of the fastest fighters, a P-61 Black Widow, was equipped with Type 11 De-Icers. This airplane was operated at

various high speeds and the De-Icers proved satisfactory on all counts. Army acceptance was granted.

Today, after many successful years on transports, airliners and bombers, B. F. Goodrich De-Icers for fighters are in production.

YEAR'S SERVICE TEST PROVES SUPERIORITY OF B. F. GOODRICH TYPE ELEVEN DE-ICERS



NE of the most grueling tests a De-Icer Was ever put through took place over the past year. A B-24 was equipped with Type 11 De-Icers and sent ice chasing. For over a year its crew looked for icing conditions and, when no ice was found, it was made artificially by special equipment on the airplane so that they could give the new De-Icers every chance to prove their effectiveness. They never hangared the plane during the test period . . . leaving it out in blinding sun, sand, sleet and rain . . . so that the De-Icers would age much more rapidly than normal. The airplane actually logged 380 hours during the test. The De-Icers were in operation 150 of these bours. Subsequent inspection at the factory showed they were still in satisfactory condition and good for many months' service.

The Type 11 De-Icer operates on the same principle as B. F. Goodrich De-Icers now in service. The greatly improved performance indicated by the tests above is the result of refinements in design and construction briefly outlined at the right. If you are interested in more complete data on this new, more efficient Type 11 De-Icer, write today to The B. F. Goodrich Company, Aeronautical Division, Akron, Ohio.

NEW FEATURES OF THE B. F. GOODRICH TYPE ELEVEN DE-ICER

- Smoother Cross-Section: Attachment edge is thinnet, reinforcing strips are eliminated, tubes are
- Improved Tear-Resistance: The result of a new all-over surface ply of special elastic fabric.
- Improved Tubes: Sponge filler and reinforcement strips have been eliminated, rubber and fabric
- Better ice Removal: The result of more effective tube arrangements, made practical by the stronger,
- Longer Life: New De-Icer installs with less strain on the rubber, lengthening its useful life.
- Reduced Maintenance: Most of the features menmoned here contribute to lower maintenance requirements and costs.

All these refinements for better performance have been accepted by the CAA and the Army Air Forces.


B.F. Goodrich

FIRST IN RUBBER

NO OTHER BLIND FASTENER HAS ALL THESE ADVANTAGES

RIVNUT INSTALLATION IS SO EASY EVEN A BLIND MAN CAN DO IT!

- Rivnut is threaded on pull-up stud of heading tool until it touches the
- 2 Rivnut and pull-up stud are placed in hotes with Rivnut head firmly against, and at right angles to, the work.

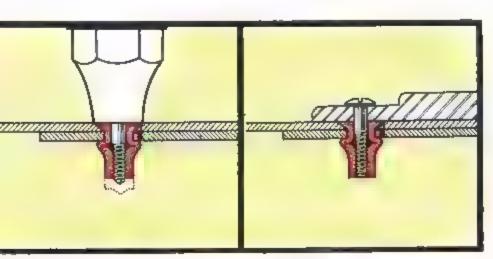

3 A squeeze on the tool lever /etracts the pull-up stud slightly, causing a lateral bulge upset of the Rivaut.

4 When pull-up stud is removed, the Rivnut can be used as a nut plate Threads grip accessory screw firmly,

They're all good reasons why B. F. Goodrich RIVNUTS deserve a place in your plans!

- Dual use—can serve as a blind rivet, as a nut plate for attachment, or as both at once
- Simple, one-piece construction
- Unusually wide bearing surface
- Requires very small hole
- Forms a compression fit
- Quickly installed
- Economical
- Ready for use as received
- Wide range of types and sizes for use in wood, metal or plastics
- Available with key to increase torsion resistance

ALTHOUGH DEVELOPED primarily as a nut plate for the attachment of De-Icers, Rivnuts have found many other important uses in aircraft construction. Typical fastening applications by leading manufacturers include assembling cloth-covered wings, ailerons, rudders, etc.; attaching fillets and fairing, door and window frames, access panels, insulation, light

BLIND FASTENER double

frames and the like; fastening panel board fixtures, bonding wires, clips, brackets, flooring.

FREE! Today, send for your copy of new folder, "Rivnut Data." Gives full facts-Rivnut sizes, grip ranges, weights, strength, etc. For yours, just write to The B. F. Goodrich Company, Aeronautical Division, Akron, Ohio



and transportation from the British stationed in permanent garrison camps. Not a single American vehicle was available at this time, but the group managed to acquire a few beat-up vehicles from the RAF

An old Italian truck was discovered in an English dump and hauled into camp where mechanics overhauled it and made it "useable". This was the first vehicle the globe-trotters could call their own; they named it the "spaghetti wagon". The ancient vehicle traveled with them from then on -across the Western Desert into Tripoli, then up into Tunisia. Later it moved into Malta, Sicily, and Italy. It is now in India awaiting trans-shipment over the Hump into China-still arousing comment whenever seen by American personnel or Allied troops.

During the Egyptian stop, the Group served a heavy bombardment group that flew in support of the British 8th Army, pounding Tobruk, Benghazi, shipping in the Mediterranean Ocean, and installations of Marshal Rommel's Afrika Korps.

The rapid advance of the British 8th following the breakthrough at El Ala mein dictated the first move for the Service Group-to Gambut, 25 mi. be-Desert, sometimes called the Libyan

The Gambut section of the Western Desert was as barren and desolate as anything one had ever seen in "sheik" motion pictures. There was a loose top-layer of sand throughout the area. constantly being picked up by the wind to swirl over everything. It covered the food, equipment, bedding, and clothing of personnel.

At times, sandstorms of three and four days' duration raged, causing all work to cease. It was impossible to see more than three or four feet, yet all this while the bright desert sun was shining. The men were given cans of emergency rations and stayed in their tents from morning to night until the dust and sand storms had abated, then they went to work.

At this time, elements of the Service Group moved to Benghazi, where they

heiped the British repair the port and fix the lines of communication. Another detachment moved to Marbie Arch, a few miles behind the thenlow Tohruk, in the Great Western current lines, where they handled the supplies and freight which American Troop Carrier planes were flying to the forward elements of the British


> At Gambut, these crewmen serviced two other bombardment detachments. in addition to the heavy bombardment group they had moved along with from Egypt, The heat and sand storms, combined with the scarcity of water, made this specific spot particularly uncomfortable. Water had to be trucked from Bardia, 35 mi. away. Each man was alloted one canteen of water a day for washing, shaving, and drinking.

The only part of the Service Group in operation at this time was the repair squadron; the other men filled in at various jobs with the bomber groups and with their own organization. From Gambut, the travelers moved to Castel Benito Airport, Tripoli.

(Turn to page 272)









flown by military unit on that island. Above, right- Gen. Stilwell welcomes Col. Paul A. Cunyus' globe-trotting Service Group to China Said the calonel to the general, "There's just one place left for this outfit to go and that's home-but only via Japan." C. D. E. F.

AVIATION, December, 1944



Service and a Paintbrush Bring and Hold New Business

By WILLIAM D. STROHMEIER

Hawthorne Airmotive doubled the number of planes it stored and serviced and quadrupled student business in less than a year. Here's how it was done—and how any other operator can do the same thing.

field for Orangeburg, S. C., has more than doubted its number of planes and quadrupled its student business in less than a year—a marked growth which is, virtually, the story of what a paint brush and a little magination can do for any small-town airport.

Today, Jennings Manager Ralph C. Crocker claims he has more private aircraft stored on his field than any other airport serving a town of equal size. His 23 airplanes in a town of 12,000 people (half the population is composed of Negroes) is a record which he believes is unequalled by any other town in the country. "If other towns can claim to have done better," he says, "we'd like to hear from them."

In all respects, Jennings Airport is a typical small-town field. Its 95 acres

were acquired by the city 10 yr. ago, and in 1936 a 60 x 80-ft, steel hangar was constructed. A small office—12 by 20 ft,—made up the balance of building facilities.

A year ago mue airplanes were stored comfortably on the field and one airplane operated by the local pilot-operator took care of all the student business. Now five airplanes are kept busy handling student and private pilot business, and the field is a hub of activity for all of southern South Carolina.

Easing of civil air regulations and the fact that the Hawthorne School of Aeronautics, which operates a large Army contract primary school nearby, are not the only reasons for Jennings' new lease on life. The namer in which business has been handled and the improvements which have been

effected on the field have been more responsible for this improvement. Here's what happened at Orangeburg, and here's what could happen at any airport under heads-up business-like management:

In Feb. 1943, operating rights on Jennings were acquired by Beverly Howard, well-known southern operator and president of the Hawthorne operations. Hawthorne Airmotive was then set up as a separate company to operate Jennings. The venture presented a departure for Howard, who has always operated on large municipal fields, such as at Charleston and Columbia, S. C.

Howard was convinced that operations on small airports could be more than a one-plane hip-pocket proposition. Principles of service to transient and local plane owners, organized instruction, and well-controlled flight operations, which apply to large airports, could be utilized equally as well on smaller fields, he felt. The success of Hawthorne Airmotive's first year and a half of operations proves that even small airports can provide decent service, and at a profit.

Almost the first thing that happened when Airmotive moved in was a fhor-



Left: Typical personal plane owner now basing at Jennings Airport is Tom Summers, who owns local jewelry store, shown here with his Taylorcraft. Smart service has helped Hawthorne Airmotive attract

unusually large number of plane owners to field. Right: This porch, with gravel floor and chairs, cost less than \$50 but has already more than paid for itself by attracting new business.

ough painting of the place. The small operations office was painted inside and out, the hangar was cleaned up, and the shop was put in neat order. A flag pole was set up next to the hangar, adding much to the smartness of the place's appearance. In this regard, emphasis on this one item cannot be stressed too highly. Without appearing to suggest exploitation of the national flag as a business-getter, the fact remains that the flag adds 100 percent to the outward appearance of any field. An airport is simply one of those places where a flag belongs. It also gives flyers a line on wind strength and direction.

The next important addition to the flight line was a parking line to assure orderly parking of planes on the field. This is both a service to owners and a protection for them, since helterskelter parking of airplanes is conducive to locking wings and taxiing into hangars and other obstacles. The line was laid down 75 ft. from the hangar and parallel to the edge of the field. Crossmarkers, the width of average light plane treads, were marked on the line, allowing an average of 5 ft. between wing tips of parked planes. At each of the parking stations tie-down ropes are attached to "deadmen" in the ground

One of the phases of good airport operation which always impresses transient pilots and which induces them to

(Turn to page 265)

Local as well as transient pilots are parked by alert linemen using standard Army technique. Note white parking line and position for wheels indicated by cross lines. (P. M. Hannum photos)



Jennings Airport operations office is neat and compact, with flight equipment—which means added revenue—attractively displayed. Shown are Manager Bud Crocker; Mary Shatlack, one of two girl employees, and C. L. Lake, Orangeburg electrician and Cub owner-patron of airport.



AVIATION, December, 1944 AVIATION, December, 1944



from GI to Blue Denim



When war struck, American business accomplished the tremendous change-over from Peacetime to Wartime production with speed and efficiency. Soon, we hope, the cycle of conversion will be completed, as our industries go back once more to the production of peacetime goods.

Breeze was ready, when the call came, to swing all her facilities into the line of march. Now, with greatly increased plant area and production potential, backed by the knowledge that Breeze products have

stood up under the grueling test of wartime service, Breeze will be in a position to answer the demands of peacetime industry with a minimum of delay.

Meanwhile, the men and women of Breeze are working day and night, producing such dependable products as Breeze Radio Ignition Shielding, Multiple Electrical Connectors, Aircraft Armor, and Cartridge Engine Starters - products that are helping the United Nations to Victory on world battlefronts.



PRODUCTION FOR VICTORY - PRODUCTS FOR PEACE


AVIATION'S New Regular Feature

Better Design

PLASTIC SERVES FOR AILERON QUADRANT

aileron quadrant installed in wing of Martin B 26 Marauder Compression-molded from mascerated fabricbase phenolic (Celeron), the quadrant metal counterpart.

Thirstrated is weight-saving plastic weighs slightly more than 7 lb is against almost 8 .b. for similar mutoriginally designed in aluminum alloy In addition, plastic quadrant outwears

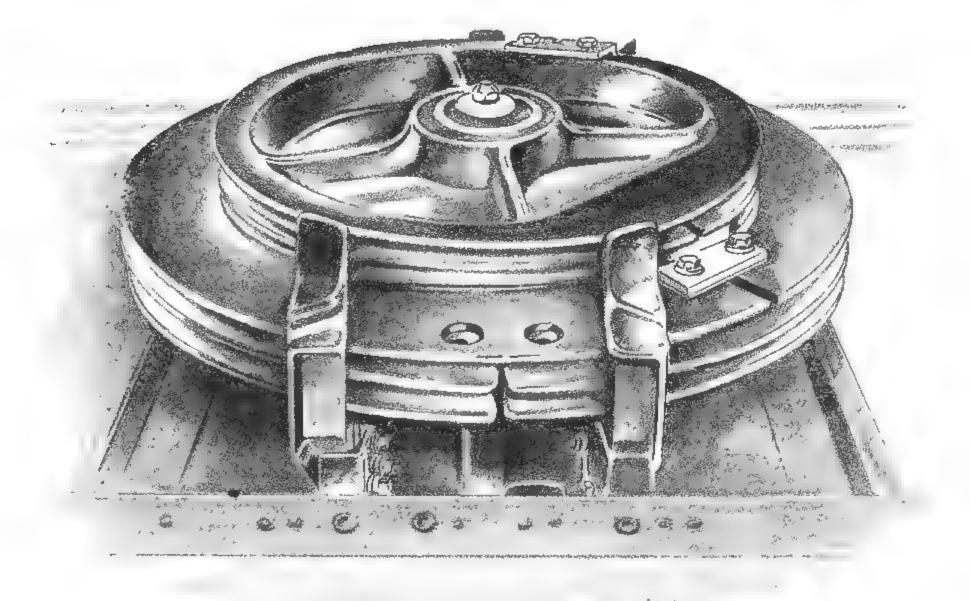

DESIGN FOR SAFER LANDINGS

BY FRANK A. TICHENOR

Publisher of Aero Digest explains the action of the Bell-designed shimmy damper now in use on many U. S. planes employing tricycle landing gear



"THE tricycle landing gear provides definite advantages—elimination of ground looping, and noseover hazard, superior ground vision, improved ground handling and maintenance, simplified landing and takeoff procedure, increased pilot safety, and easy operation from small, improvised fields.

"However, when first developed, the tendency of the nose wheel to shimmy or caster hampered its use by setting up a vibration so great that there were cases in which the nose wheel strut was literally ripped out of the fuselage.

"A former Bell Aircraft sales executive—now a Lt. Colonel in the AAF who wears the Distinguished Flying Cross—and two Bell engineers, ingeniously helped to solve this problem with the shimmy damper—a control which helps keep the nose wheel from rotating more than 60° to the left or to the right.

"Located in the bottom end of the nose wheel strut, it consists of two fixed vanes and a wing shaft on which there are two vanes. This assembly is filled with fluid.

"When the nose wheel tends to turn, the pressure of the wings forces this fluid through a metering orifice which in turn is further controlled by a thermal valve—thereby dampening the motion of the nose wheel's lateral reaction. The only outlet for the fluid

is through the valve, which can be adjusted to stiffen or ease up the nose wheel action in accordance with the pilot's requirements.

"The wing shaft can rotate only in a radius of 120°, because of stops which prevent further rotation.

"War planes now land and take off in jungles and from icy steppes as smoothly as at any of our modern airports at home, thanks to this kind of pioneering.

"The shimmy damper is one of the many contributions which Bell Aircraft has made to the progress of the aircraft industry."

* Buy War Bonds and Speed Victory *

NIAGARA FRONTIER DIVISION

Buffalo and Niagara Falls, N. Y.

Arracobra P.39 and Kingcobra P.63 — Fighters

Arracomet — America's First Jet Propelled Plane

The Bell Helicopter

ORDNANCE DIVISION

Burlington, Vt
Elexible Gun Mounts and other ordnauce materials

GEORGIA DIVISION


Marietta, Ga. B-29 Boring Superfortress

PACEMAKER OF AVIATION PROGRESS

MEMBER AIRCRAFT WAS PRODUCTION COUNCIL., EAST COAST, INC.

AVIATION, December, 1944

WINDOWS FOR TERMINAL CONNECTIONS

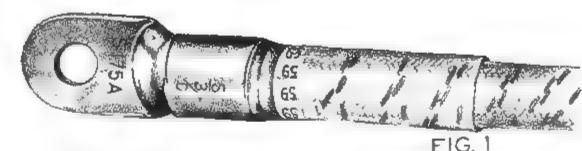

Anals of 00, 0, 2, and 4-size cables on Northrop's P-61 Black Widow is provided by transparent Irv-o-lite sleeves. Adoption of the insulating material and method of installation was conceived by W. S. Drew of Northrop's electrical department wrapped with tape


Approved by the Army, the new transparent insulation (F.g. 1), affords a quick permanent installation permitting instant visibility for in-

FIG. 3


spection of soldering and numbering

The insulation is applied by insertion of a beveled air hose fitting (Fig. 2) under the sleeve end, compressed air expanding the tube for slipping over the terminal.

Formerly, terminal connections were wrapped with tape (Fig. 3) and coated with methyl-cryolite. Later, in final assembly inspection, the tape was removed to check soldering and then required another wrapping operation.

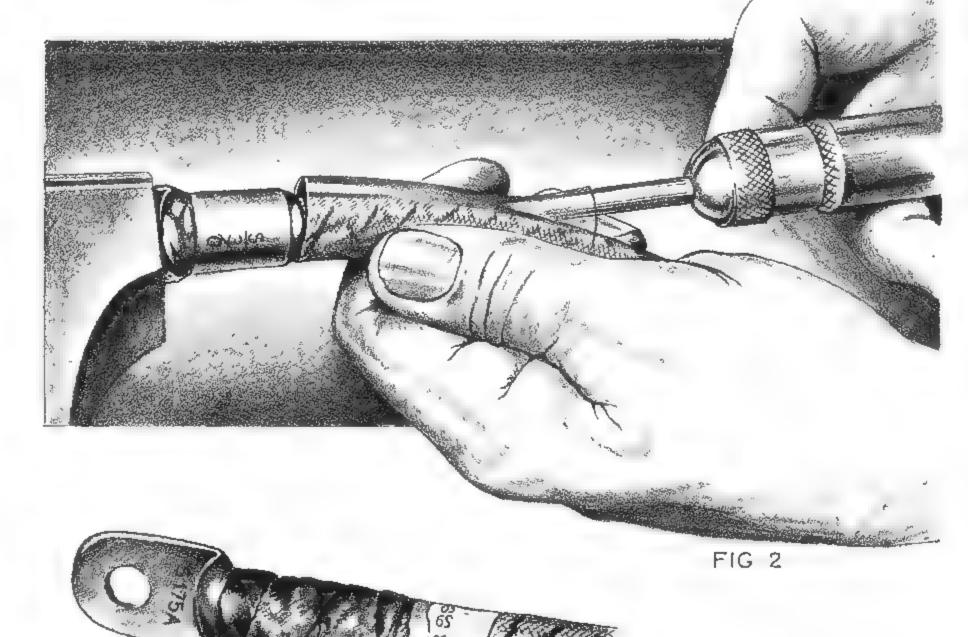

D Bell 4 rans/1 Largematic

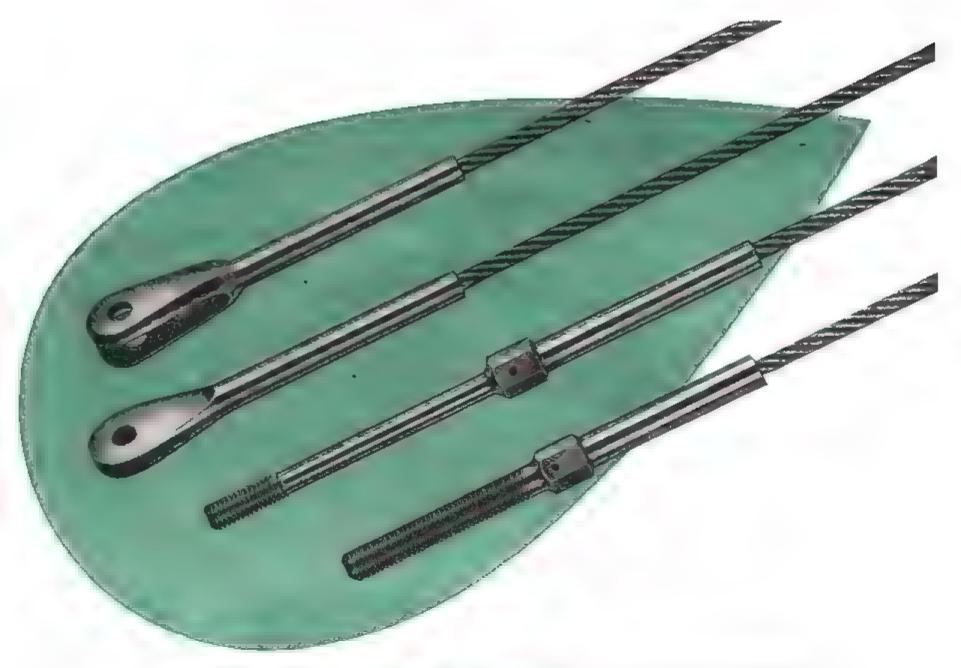

SPECIFY TRU-LOC TO MAKE SURE THAT YOU GET THE ORIGINAL SWAGED TERMINALS

As the aircraft industry developed, American Chain & Cable Company, Inc., instituted a continuous program designed to actually anticipate demands that would be created by advances in aircraft design.

This program has already produced Center Pull Loop Fittings for secondary controls, Ball-Type Swaged Terminals and Ball with Strap Control Terminals—to mention but three of its concrete results.

It was—and is—a definite part of the program


to develop the so-called "standard" sleeve-type swaged terminals so that in dimensions, swaging qualities, final strength and finish they would always be right on the beam. These swaged terminals were originated and patented by the American Chain & Cable Company, Inc.—and it might be worthwhile to remember that when you specify TRU-LOC you get Swaged Terminals that represent the greatest experience in the industry with them. For complete data and illustrated bulletin, address our Detroit office.

AUTOMOTIVE AND AIRCRAFT DIVISION

6-235 General Motors Building, Detroit 2

AMERICAN CHAIN & CABLE COMPANY, Inc.
BRIDGEPORT, CONNECTICUT

ESSENTIAL PRODUCTS... TRU-LAY Aircraft, Automotive, and Industrial Controls, TRU-LOC Aircraft Terminals, AMERICAN CABLE Wire Rope, TRU-STOP Brakes, AMERICAN Chain, WEED Tre Chains, ACCO Malleable Castings, CAMPBELL Cutting Machines, FORD Haists, Trolleys, HAZARD Wire Rope, Yacht Rigging, MANLEY Auto Service Equipment, OWEN Springs, PAGE Fence, Shaped Wire, Welding Wire, READING-PRATT & CADY Vaives, READING Electric Steel Castings, WRIGHT Hoists, Cranes, Presses . . . In Business for Your Safety

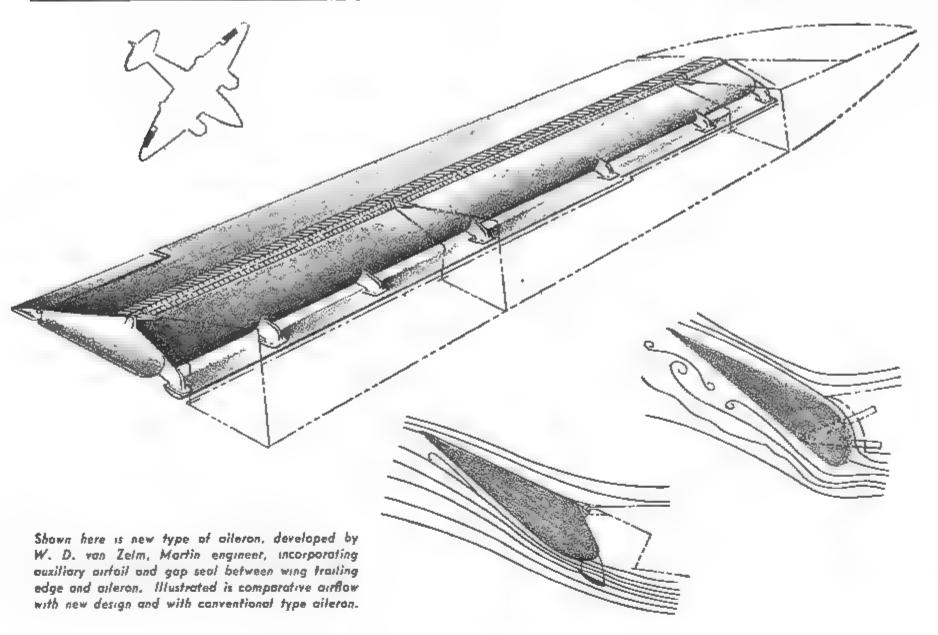

AILERON DESIGN ALLOWS FOR LONGER FLAPS

A NEW AILERON DESIGN developed by W. D. van Zelm, Martin engineer, supplies the same degree of rolling moment as the conventional Frise ail eron while affording a 35-45 percent reduction in span, thus permitting considerable lengthening of wing flaps with consequent increase of capacity load, or shortening takeoff run and lowering landing speed.

Prehimary research to determine the reasons for lack of effective force of conventional ailerons revealed that the projection caused by the balance portion of aileron leading edge created turbulence beneath the aileron and resulted in a loss of effective roll and increase in control force for up-angles of more than 15 deg.

To overcome this condition, the van Zelm design incorporates an auxiliary airfoil in combination with a seal closing the gap between trailing edge and alleron to smooth the air under the alleron in the up position, meanwhile balancing the aileron with a force in direction of roll, permitting twice the up deflection of conventional type.

The auxiliary airfoil or slat, extruded from aluminum alloy, is attached to the leading edge of the aileron with metal clips or plates, and in the neutral and down positions fits in offers the addedinto a cutout section of the wing trailing edge. The auxiliary airfoil inshown that no drag volves no weight addition since it replaces the metal weights used in former ailerons to bring the center of gravity forward of the hinge point to prevent flutter.

Indeed, friction is h. Whereas the principles at its opposite conjunction with the offers the added nating drag (wind shown that no drag ularities at the bottom the top is sealed) and the formation of gravity forward of the hinge point to prevent flutter.

The improved assembly employs a top hinge for attaching aderon to trailing edge. This removes restrictions on upward deflection while still permitting downward deflection up to 15 deg. (the same amount provided by the conventional center hinged aileron) because of the cutout section in the trailing edge. The top hinge also simplifies the problem of sealing the gap between aileron and trailing edge.

The seal, a spring-metal strip attached to the top of the aileron, runs for postwar counder a bulb section at the wing trailing edge. Since contact with the trailing edge is very close to the hinge operating costs.

line, friction is held to a minimum. Whereas the principal function of the seal is to provide smooth airflow in conjunction with the auxiliary airfoil, it offers the added advantage of eliminating drag (wind tunnel tests have shown that no drag results from irregularities at the bottom of the gap when the top is sealed) and tends to prevent the formation of gap-ice, which might lock the controls.


Further advantages claimed for the new design include: Greater rigidity, since the hinge line is at the wing surface, outside of the aileron contour, and the torque box nose is not cut; better balance through elimination of torque box carry-over structure, reducing weight aft of the hinge; and lower fabrication costs because of simplification of the internal structure.

Successfully test-flown on an experimental B-26 Marauder, the van Zelm aileron is being incorporated in designs for postwar commercial aircraft to obtain added lift with consequent greater payloads, and also reduced operating costs.



MARTIN MARS

VICKERS POWER (Hydraulic) BOOST FLIGHT CONTROL

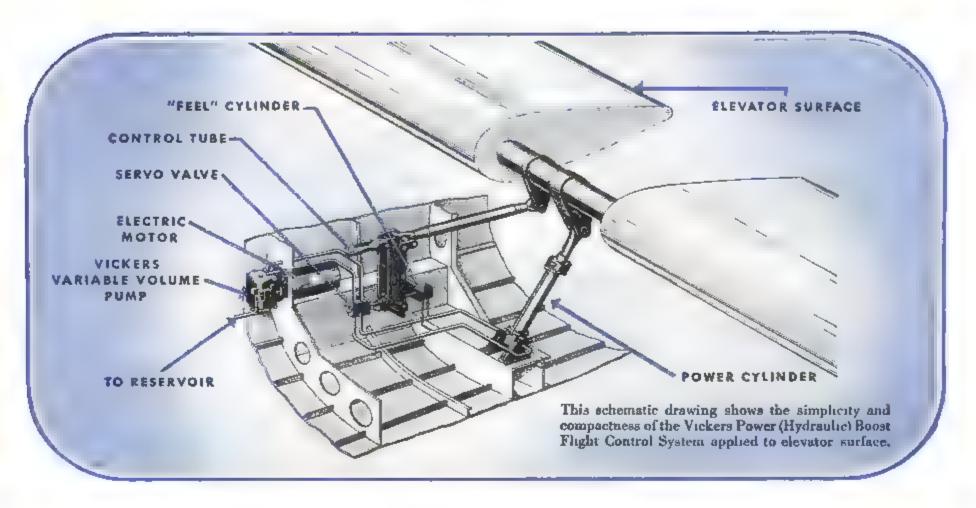

In a paper he presented before the National Aeronautic Meeting of the S.A.E., E. G. Riley, Project Engineer of the Glenn L. Martin Co., enumerated the essential characteristics of a power boost control system as: "(1) proportional feel, (2) feedback and free control stability, (3) immediate and smooth response even after long idle periods, (4) manual standby, (5) instantaneous control by pilot in case of failure, (6) operate satisfactorily under temperatures from minus 65° F to plus 150° F,


(7) be capable of being operated by automatic pilot, (8) easily serviced by inexperienced personnel, (9) be relatively trouble-free and have a minimum of adjustment."

In his summary, Mr. Riley made the following statement: "It can be concluded, therefore, that the Vickers power boost control unit is capable of satisfactorily fulfilling all the requirements set forth." This Vickers equipment is now standard on the Mars airplane.


AVIATION, December, 1944

VICKERS Incorporated • 1462 OAKMAN BLVD. • DETROIT 32, MICHIGAN ENGINEERS AND BUILDERS OF DIA WYDRAULIC COULTMENT SINCE 1921

MANY PRINCIPLES of rotary wing aircraft design apply to both helicopters and autogiros alike; in fact many features incorporated in helicopters today have been transferred bodily or adapted. Since so many of the principles can be used in either type craft, Aviation presents these hitherto unpublished detail sketches of the Pitcairn roadable autogiro as an additional contribution to rotary wing development.

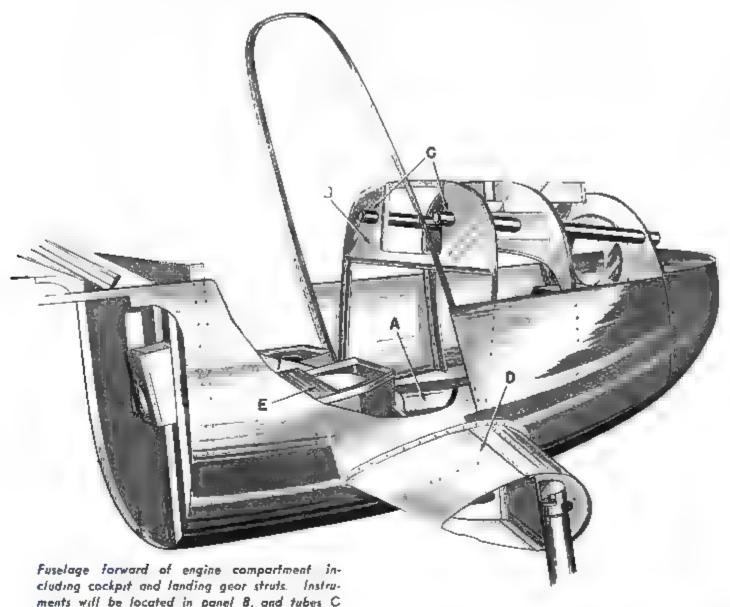


Fuselage torward of engine compartment including cockpit and landing geor struts. Instruments will be located in panel 8, and tubes C house control columns. D is built-up structure supporting landing geor struts, and gas tanks E form base of passenger seats.

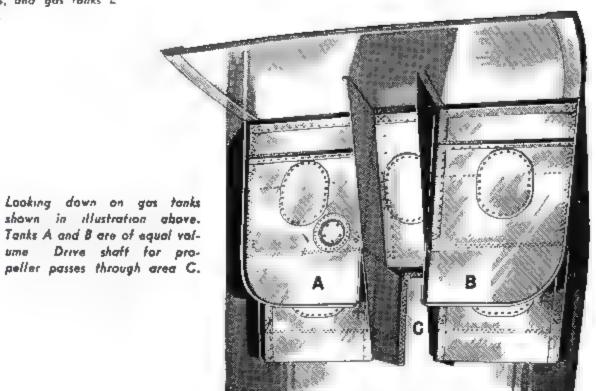

AVIATION, December, 1944

208

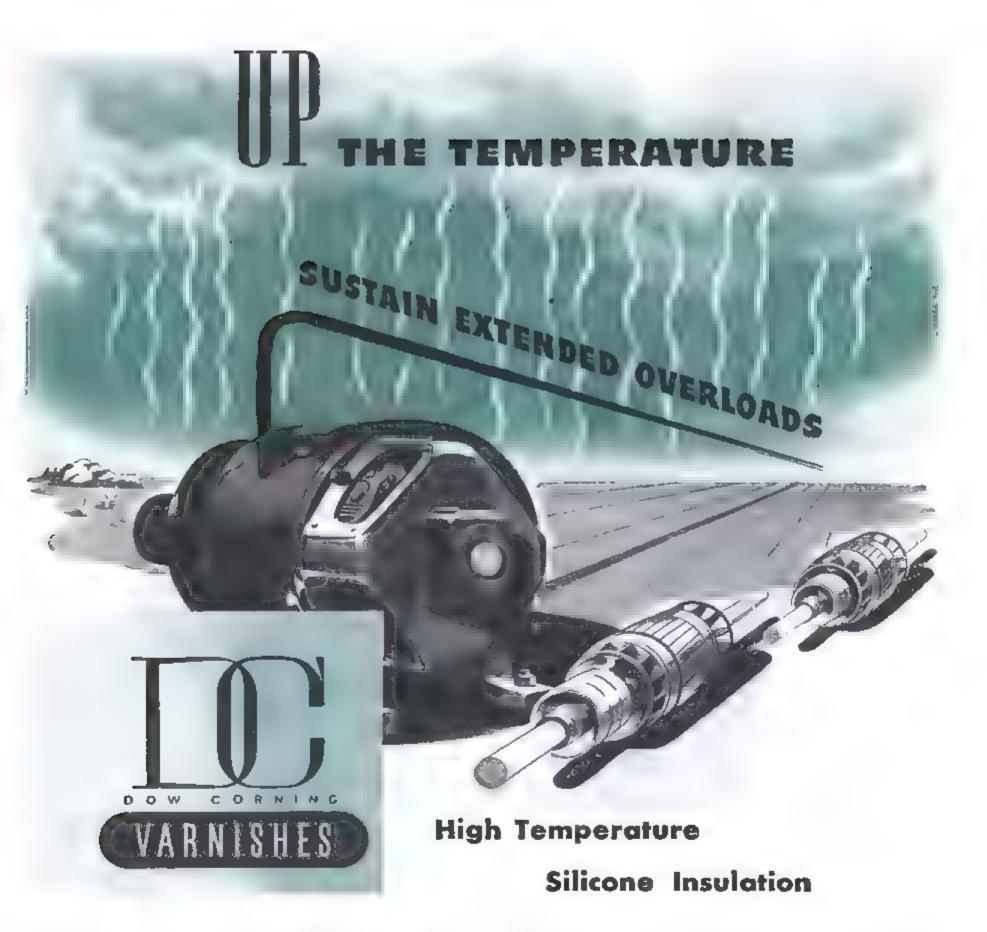


Dow Corning Silicone Varnishes are helping to create a new class of insulation insulation in a class by itself for thermal stability, moisture resistance and freedom from overload failures.

They provide the bonding and filling medium for inorganic, or Class B, spacing materials such as Fiberglas, asbestos and mica, which are natural components of this type of insulation.

Dow Corning Varnishes open the avenue to the designing of more compact, lighter weight electrical equipment.

DOW CORNING CORPORATION BOX 592, MIDLAND, MICHIGAN DOW CORNING 993... available in commercial quantities is a heat curing, high temperature stable silicone varnish for impregnating motor stators, transformer coils and other electrical equipment; for varnishing Fiberglas or asbestos served magnetic wire; for varnishing Fiberglas and asbestos electrical insulating cloths, tapes, tying cords and sleeving, for bonding Fiberglas and mica combinations,



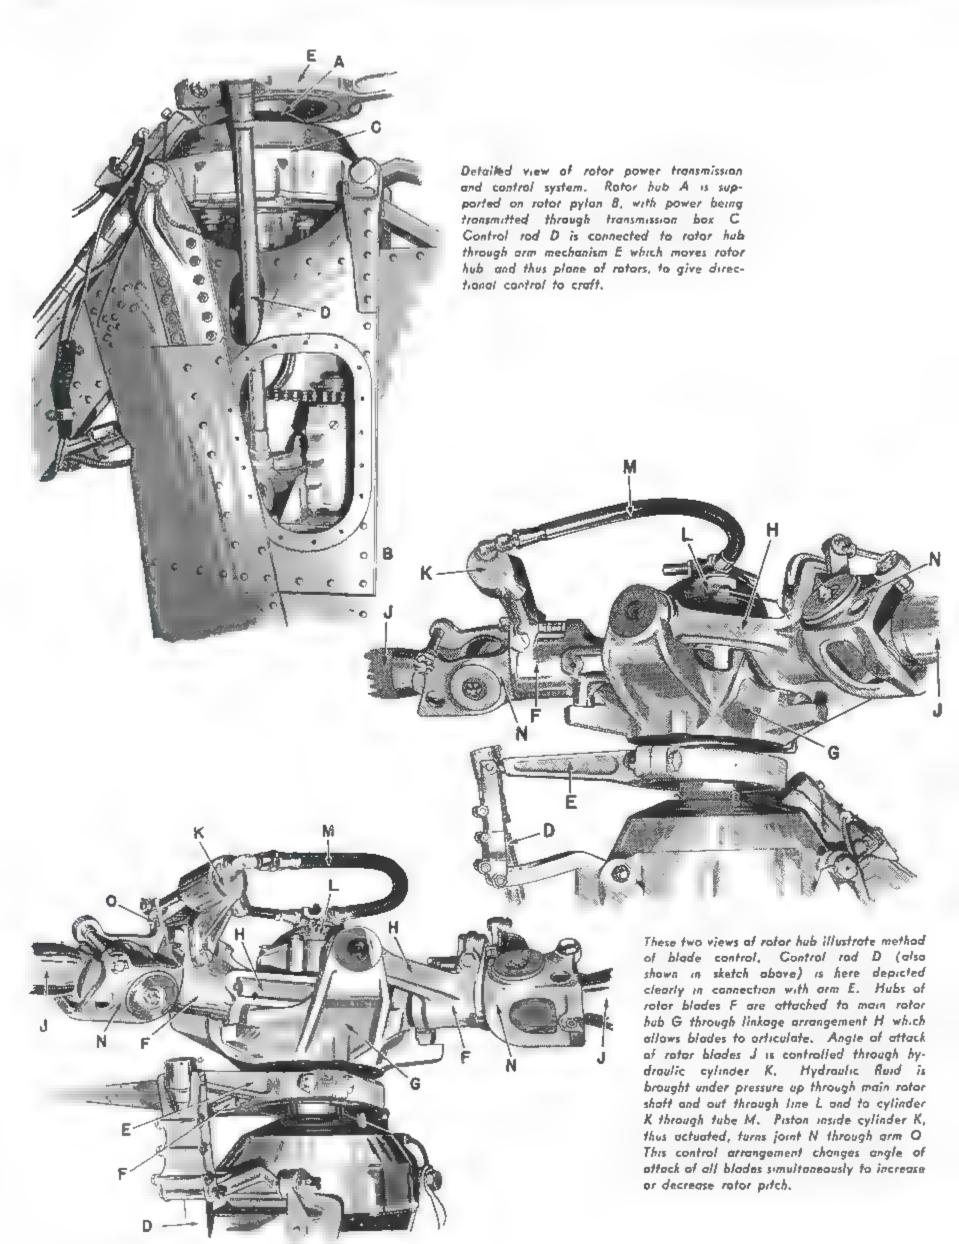



"U" type SPEED NUTS are easily and quickly applied — just snapped by hand into screw-receiving position — no welding, riveting or clinching necessary. No wonder "U" nuts SPEED UP product assembly!

"U" type SPEED NUTS hold tight—their arched prongs absorbing vibration to prevent loosening. Yet, their resiliency prevents damage to the parts they hold. No wonder "U" nuts

IMPROVE the finished product! Available in many shapes and sizes, "U" type SPEED NUTS fit a wide range of thicknesses—metal plastic or glass.

Send us your design details and we'll show you how SPEED NUTS can cut assembly time and cost and improve the quality of your

product too. Write today!



TINNERMAN PRODUCTS INC.

2070 FULTON ROAD, CLEVELAND 13, OHIO

In Canada: Wallace Barnes Co., Hamilton, Ontario.


In England: Simmonds Aerocessories Ltd., London.



*Trademork Reg. U. S. Patent Office

AVIATION, December, 1944

FASTEST THING IN FASTENINGS

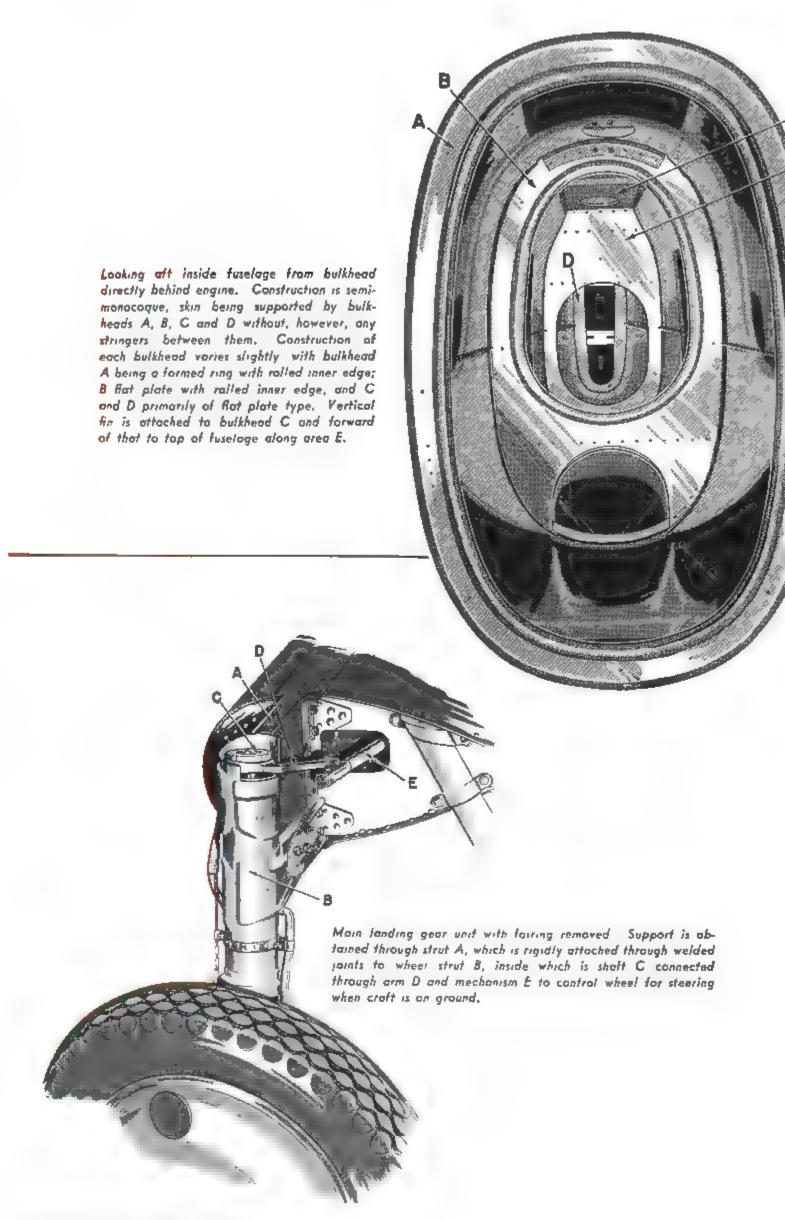

Review of Patents.

By A. HARRY CROWELL, Registered Patent Lawyer

Pollowing are digests of some of the more interesting recent patents on aviation developments granted by the U. Patent Office. Mr. Crowell will gladly turnish readers with free information on approximate cost and procedure in applying for patents and trademark registration. Address inquiries to him, care Aviation, 330 West 42nd St., New York City (18. Printed copies of any of patents 1 sted are obtainable at a cost of 10c each, directly from U. S. Patent Office, Washington.

Airplane Pickup Mechanism, employing relatively light inexpensive masts made possible farough use of improved catabult release meet a important for the factor of masts, maintained in persposition by flexible element to which pack go is connected. Discontection of flexible element from entirer switch upon pickup of cable by pane hook closes circuit for releasing that the part of package without nationale drags. 2,356.671, filed May 8, '41, pat targ 22 '44, J. G. Ingres and H. W. Hey, assignors to E. G. Hill and G. T. Smith.

Rotary Wing Invention is intended to correct control difficult es resulting from lateral cone tilt by provioing means which utilizes close relationship between longitudinal and lateral component of cone tilt, for purpose of causing eve in pitch change to suppress lateral com-

ponent 2 356.692, filed Feb 4 '41, pat Aug. '2 '44, H H Platt, assignor to Rotary Research Corp.

Automatic Control for Blade Pitch, employing arrangement of V belts and pufeys aims to provide effective mexpensive mechanism having minimum of toothed-geats, responsive to feed for change in blade angle 2,356,77%, filed June 7, 43, pat Aug 29, 44. R. C. Mager

Fuel System stated to be especially adapted for multiple give surrest provides for transfer of theil from any tank of group of tanks to any of another group by means of selector valve associted with each group, valves having common part and plurality of distributing perts 2,356,786, filed Nov 14, 41, par Aug. 29, 144, L. F. Harman and O. H. Snyder

Airplane Wing Construction method proposes use of metal (alaminum) tobular members, one tube extenderly surrounding another, the tubes oring of different lengths and diameters, secured to each other to attain increased rigidity and strength without increase of customary weight of such elements. 2 156,918, files Frb. 21, '42 pat. Aug. 29, '44 O. R. Courtney

Aircraft Fabric Covering Method consists of securing shrunk tant, woven, mechanically extraded organic filament fabric to cover structural framework of plane, the fabric having at least one impregnating coat of dark opaque cellulosic dope and also a super imposed coating of colored dope—2,356,927, filed Nov 9, '40 pat. Aug. 29, 44, D. B. Grossman, assignor to Roxalin Flexible Finishes, Inc.

Rate of Ascent and Descent adocator for air eraft comprises pair of tubes each open at one

end to atmosphere and having opposite end communicating with seared air container. In I calling element movably disposed in each tube responsive to airflow occasioned by pressure in container and prevailing atmospheric pressure, wis bly indicates rate of ascent or descriptions. 2,357,360, the Aug. 21, '42, pat. Aug. 29, '44 J. Ribinson.

Heating System Control affords means for elm at ag heavy loads on aircrait electrical general ag system by cutting off genters daining interruption in supply finited mixture to nea eradicine is accomplished by asc of the postute switches in special circuit 2:57:404, 11 d. Dec. 19, 4, pat Sept 5, 44 S. F. Heymann and L. A. Williams, Jr. Jassignors t. Stewart-Warner Corp., and H. J. De. N. McCollin.

Signal for Missing Aircraft comprises container for small electric plant housed in shell of fuschage or other part of craft so that container will be ejected by impact to event of rash or released by water acting as so vent, causing ill, mination of container 23574.7 filed Sept 13, 43 pal Sept 5, 44 E. B. Marpie


Afteraft Training Device is apparat is to give student rea sixt corrept of flying and proper ase of controls to maintain flight. It eage structure is smoothed with convertional controls is mounted for responsive movement on end of beam proved for movement about horizontal axis and it retotation about vertical axis = 2.357.48 fixed Jine 5.44, pat Sept. 5.44, H. J. Matlon.

Airplane Bomb Hoist & wing-mounted and adupable for loading thing botts from homb carrying barge. Incorporated is means for the loading in cabe slack and inport recase in caste load it pennst yielding to about shick by so thing and stopping discovered movement of bomb load then raising bomb without erking 2 158 096 field Aug. 18, 41, pat Sept. 12, 44, G. A. Peterson assignor to Boeing Arecraft Co.

Aviator's Seat is associated with against door provided with extension to eatch force of an when plane is in flight. In emergency door is released and swings plot clear flightne to said; use parachute 2,358,603 filed Apr. 13, 42, par. Sept. 19, 44. H. A. Southerland.

Fighter Plane o two-seater type has control system after fed to enable rear guiner to direct erit to order to put fixed armament in rear puts agested fixing position —2 358 919, filed Jan 9 41, pat bept 2c '44 R Finck, yester a Alex Property Custon and

Airplane Flight Demonstration device enables student to Therve act on of pristream on air folia Smake generator is provided, and dueta lead smoke over airbot 2,358 931 filed July 4, 142, pat Sept 36, 44, M. H. Kanlow, assignor to G. Laughead.

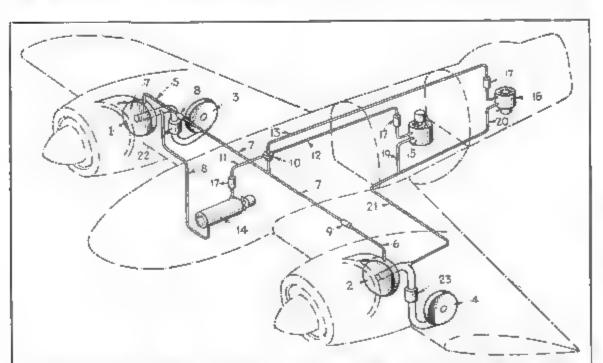

Airplane Heating System is intended to distribute load of plarality of internal combustion heaters between plarality of engines by to operate all histers from one engine if other fads. In accompanying llustration, superchargers (1) and (2) are power driven and superchargers (3, and (4) are driven hy engine exhault. Extending from high pressure chambers of superchargers. I) and (2) are conducts of superchargers. I) and (2) are conducts of superchargers. I) and (2) are conducts of additional (1) through check valves (8) ind (9) (on lint 7) hads to distribute (1) from which other conducts. It (12) and (13) ead, respectively to heaters. (14) that (15) and (16) Extend (17) in conducts of (18), and (18) is controlled by electrical cycould (not shown) or cutting heater off and or to reconducts with rather of the engineering supercharger (1) though the electrical cycould (not shown) or cutting heater off and or to reconducts with native of supercharger (1) that is that the discounter for supercharger (1) that is not to discounter from supercharger (1) that is not to discounter to make on topic connected with intake of (2) from heaters (1) and (2) from heaters (3) and (4) are proved to the factor of the fac

2v8

supercharger (2) at point posterior to eischarge of supercharger 4). Turbo carbaretors (32 and (33, are included, respectively between high pressure sides of superchargers (3) and (4) and tow pressure sides of (1) and (2.

Thilization of power-driven and exhaust-driven approximately approximately.

I'thization of power-driven and exhaustdriven supercaurgers gives comparatively an form pressure maintained in corduit retween them at point where exhaust from

tween them at point where exhaust from beater enters supercharger conduct. If ergine steps, press to recorresponding cor hat so or (6) will drop to that of atomistic prese at plane allitude and pressure in the conduct will deliver arger and act of carboreted are than when both engines were opened as but flow tenength astribut a fill will remain substituted constant. All neaters contour to operate although the one having exhaust connected to operate will receive slightly less indicatific in a ture than previous received and other heater or the ters, will receive same or slightly more in stare. 2 57 112 filed Apr. 2 43 pat Arg. 9 44 S.E. Hey main assignor to Stewart Warrer Corp.

Book Reviews

A GUIDE TO NAVAL STRATEGY, by Bernard Brodie. Princeton University Press, Princeton, N. J. 314 pages, index. \$2.75.

Treatment is given in this book which is a revised edition of the carlier. A Layman's Guide to Naval String, ") to the role of the par arm in modern sea power.

SYMPOSIUM OF THE APPLICATIONS OF SYNTHET C RUBBERS American Society for Testing Materials, Philadelphia, Pa. 145 pages \$1.50

Consists of 13 technical papers presented at the Spring 1944 neeting of the ASTM in Continuationach written by an authority in the field

THE COMING AIR AGE, by Reginald M Cleve, and and Leslie & Nevitle. Whittlesey House, McGraw Hill Book Co., N. Y. C. 359 pages, photos. \$2.75.

An over all and closely written survey of problems of postwar trivition, with practical emphasis on what can and cannot be done in private and co-mercial triaction, in light of our present knowledge Treatment includes discussions on postwar to balcal and financial status of and stry geography of the air friedom of the air firlings, and sky fright ne asserts of typical plane structures in resition to private, it came in face wisideration assert increased lative type

To not page 40

AVIATION, December, 1944

PAYLOAD IS PEOPLE OR PACKAGES



A most cursory study of the Constellation's performance records indicates immediately that it can never be considered a one-job transport. Versatility is the word.

Interiorwise, for instance, the Constellation is easily adapted to meet the commercial demand of the specific route, to carry its payload in terms of people or packages or both.

Flightwise, it is able to operate most economically over the specific distance required—whether transcontinentally or on flights as short as 100 miles. Indeed, versatility is the word.

Express, sleeper or inter-city local, the Constellation is designed to solve special problems of the individual airline.

The Lockheed Constellation

SETS THESE NEW WORLD STANDARDS

Biggest load-carrying capacity of any transport

Longest range of any transport
Fastest speed of any transport

Greatest rate of climb of any transport
Highest cruising altitude of any transport

And these performances make the Constellation

the safest of any transport

Leadership IN LOAD-CARRYING CAPACITY

Lockheed's Constellation is a big plane—big enough, in fact, to carry 64 passengers and their baggage. In addition, it has adequate space for mail, express and cargo. Two compartments totaling nearly 500 cubic feet are available and may be loaded and unloaded underneath the plane. Revenue loads of approximately 18,000 pounds can be carried easily by the Constellation on medium-distance operations.





Q U E S T I O N S

- Q. Are oxygen masks ever necessary when flying in the Constellation? -M G, Maplewood, N. J.
- A. No. Constellation passengers never go above 8,000 feet even if the plane's altitude is as high as 20,000 feet. Automatic devices control density, heat, purity and circulation of air in passenger compartment.
- Q. Why does it take so long to develop a new transport? . -John T., Baton Rouge, La.
- A. In addition to hundreds of thousands of man-hours of basic engineering, literally thousands of tests are made in the wind tunnel before an airplane is built. On the Constellation, a complete hydraulic system, duplicating the entire functional mechanism of the airplane, was constructed and tested for months to assure perfection of all parts.
- Q. Is there a reason for the sharklike profile of the Constellation fuselage? -Tom P., Los Angeles, Calif
- A. Yes. Its airfoil design allows maximum length for full-round pressurized cabin. Down-sloping nose camber gives better pilot visibility—reduces landing gear weight.
- Q. You say the Constellation is a safe airplane. Why?

 -R. L., Springfield, Mass.
- A. In the first place four powerful engines mean greater safety. The Constellation will CLIMB on any two of them, land or take off fully loaded with a very short run, and is able to fly over bad weather. In addition to its great power there are scores of other safety features. A few of them are: tricycle landing gear, automatic fire extinguishers and power boosts on operating controls.

Send In your questions . . . Address: Lockheed Aircraft Corporation, Department 69-55, Burbank, California



FOR NEW WORLD STANDARDS IN AIR TRANSPORTATION LOOK TO Lockheed FOR LEADERSHIP

Lockheed Arreraft Corporation, Burbank, California

ENGINEERING DATA BOOK


SHEET NUMBER . . . D-25 (cont'd from November)
CLASSIFICATION . . . Materials
SUBCLASSIFICATION . . . Stainless Sheet Steel



Elastic Properties Stainless Steel Sheets

 Armco High Tensile Stainless Steels meet the tensile requirements of specifications AN-QQ-S-772a. given below, have compressive and tensile

properties at least as high as those tablulated on these and preceding pages. Working stresses can be obtained by dividing by proper factor of safety.

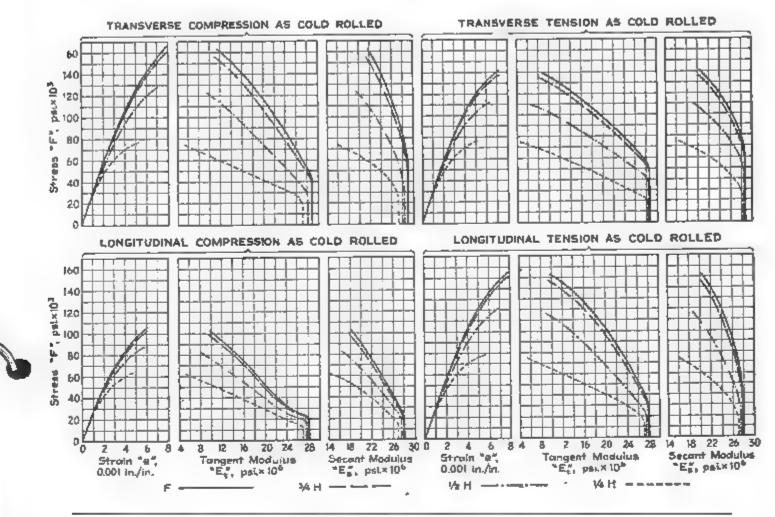

Bending Properties — AN-QQ-5-772A

Test specimens must withstand cold bending in any direction relative to rolling direction through angle indicated in follow-

Composition and Physical	Thickness 0.0 In and Und	30	Thickness of speamen with the course of the	30	Thickness 0,0 In. and Ove	
Condition	Angle in Deg.	N	Angle in Deg.	N	Angle in Deg.	N
Class I & II	180	1	180	1	180	1
Hard Hard	180 180	1 2	180 180	1 2	90 90	2 2
Hard Hard	180 180	3	90	21		=



Class and Physica: Tensile Strength Condution Lb. Per Sq. In.		t tryptodr 110		din.)		
		Yield Strength At 0.2% Set Lb. Per Sq. In,	Thickness Up to 0,015 In.	Thickness 0.016 to 0.030 In.	Thickness 0.031 In. And Over,	
Class I (Low Ductility)	Min. Max.	Min.	Percent	Percent	Percent	
Annea,ed † Hard † Hard † Hard Hard Hard	75,000-100,000 125,000 150,000 175,000 185,000	30,000* 75,000 110,000 135,000 140,000	40 12 7 3	40 12 8 5	40 12 8 7 4	
Class II (High Ductabty)					.,	
Annealed † Hard Hard Hard Hard	75,000-100,000 125,000 150,000 175,000 185,000	30,000* 75,000 110 000 135 000 140 000	40 25 15 10 8	40 25 18 12 9	40 25 18 12 9	

^{*} Value o. yield strength for information only. Yield strength tests will not be conducted unless specified.


AVIATION, December, 1944




SHEET NUMBER D-25 (conf'd) CLASSIFICATION Materials SUBCLASSIFICATION . . . Stainless Sheet Steel



Elastic Properties Stainless Steel Sheets

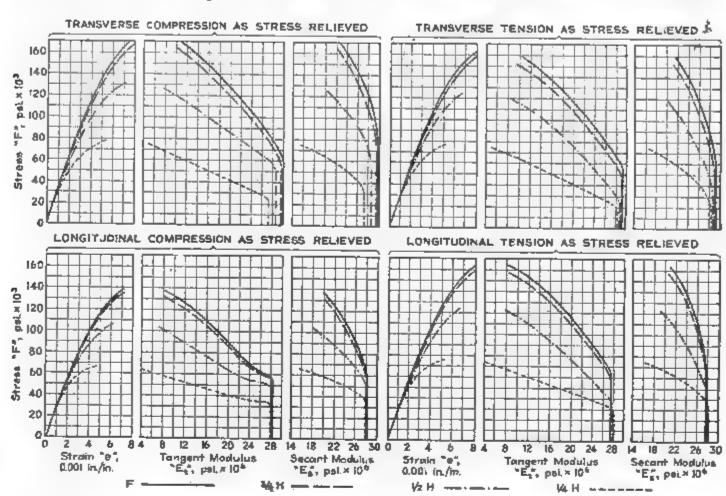

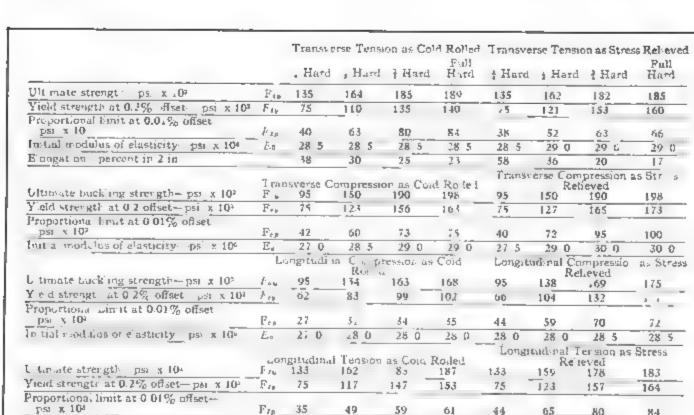

27 0



Manufacturer wishes following deleted on p. 209, Nov Aviation Under "Temper" delete figures 135, 150, 175, 185 opposite Ultimate Strength, 75, 110, 135, 140,

Initial modulus of elasticity psi x 106

opposite Yield Strength; 25, 18, 12, 9 opposite Percent Elongation. Note that Yield Strength was taken at 0.01% offset and Proportional Limit at 0.2% offset.



ease and extra safety in any position ... head-high, overhead or on ladders ... by simply attaching this Pressure Handle to your SKILSAW DRILL or any make of drill. Pressure Handle gives the operator complete control of drilling pressure at all times . . . eliminates twist drill breakage . . . saves the time of an extra man with ropes or chains to hold the drill.

Fits SKILSAW DRILL Models "64", "80", "82", "83", "101", "103", "121", "123", "141", "143", and all other makes of electric or pneumatic drills of from % in. to 1 in. capacity in steel.

Sold Nationally Through Skilsaw Distributors for \$30.

Ask your distributor today for a demonstration of this Pressure Handle on your own work.

SKILSAW, INC. 5033-43 Eiston Avenue, Chicago 30, Ill.




Sales and Service Branches in All Principal Cilius



GREATER SAFETY WHEN

DRILLING OVERHEAD

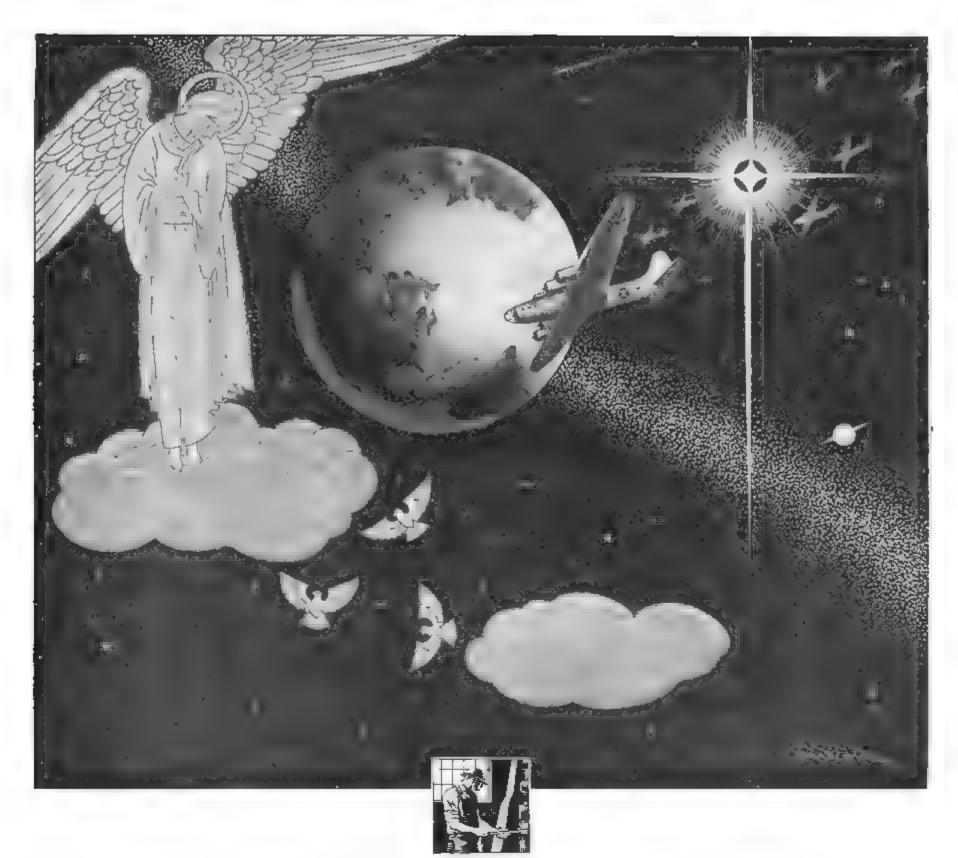

Our Christmas Wish....

That this World be producing for Peace ere Christmas comes once more.



* AIRCRAFT MECHANICS MG.

COLORADO SPRINGS, COLORADO

DENGNER - ENGINEERI

The AVIATION

BLAINE STUBBLEFIELD, Washington

HERB POWELL New York

Plan New Expansion of Airborne Operations minish to minor proportions With Aircraft "Built Around" Equipment

... Move to settle terms of field program ... Wright probably with no diminution shapes CAA for postwar . . . More comments sought in tactical and strategic types re CAR changes . . . Status of civil instructors, re- Heavy fighter protection is servists reported . . . Report WTS settlements . . . requisite for daylight airborne Zone flying still tight . . . Begin 4th IAT program. attack.

big scale Fully 90 percent of freight. the equipment, weapons, and Troop Carrier Command of supplies used by the Ground ficials, interviewed at TCC rier aircraft.

battal.on from Australia to evacuation equ.pment They and county governments. New Guinea, 1,400 mi over the are changing the design of ve- CAA's report to Congress

Army is preparing to ex-putting down three divisions pand airborne operations on a of troops with 4595 tons of

Forces is already transporta- headquarters. Stout Field ble by air The other 10 per- Ind and at the airborne war cent will be made air trans- display on Washington Naportable by (1) modification tional Airport in early Novemof the equipment, and (2) in- ber told Aviation that the creasing the capacity of car- new Fairchild C 82 cargo carrier, which grosses about 50 -Many military authorities 000 lb. is just a beginning. believe that alrborne attacks They are planning still bigger will be carried out on an aircraft, to fly the largest builarmy-size scale in this war if dozers, heavy guns, and me-

To whatever extent the Army goes aloft, by so much the over-all requirement for airplanes will be increased,

A major shift to the air would change not only the logistics of war, but also the strategy. The element of surprise nears perfection in airborne operations. Without any sign of intention, a command of any size can rendezvous at night, and hit an objective in any direction, at several hundred miles range And range will constantly increase

Move to Settle Terms Of Airfield Program

With expansion of private it continues for many more dium tanks. Some of these aviation depending heavily months. Only a few divisions planes will have to be "de-upon development of an exhave been sent by air, fully signed around the equipment" tensive airparks and airports equipped, to their objectives they are to carry program, CAA and other in-thus far The Germans con- The Army's researchers are terested groups are trying to program, CAA and other inquered Crete with lightly finding ways to reduce the settle the terms under which Apr equipped troops in chutes weight of everything, from expected appropriations by gliders, and fly-in planes The trucks to portable kitchens Congress will be allocated U.S. Army flew an infantry and first aid stations and among states and municipal

Owen Stanley Mountains, and hicles, weapons, and tools, for recommending its airport pro-Similar operations were car- in high authority who believe Bureau was considering other ried out in Burma, Sicily, Nor-that main armies-men, weap-things, including a report mandy, and most recently in one and supplies will take to from the Public Works Ad Holland where 5 292 airplanes the air and that mil.tary manistration which also contook part with 2 602 gliders in walking and driving will di- cerned airport requirements Like the Bureau of Piblic Roads, which bid to participate in a flight strip program PWA may try to play a part an airport planning

It is hoped that Congress will act, early next year on a bill by Rep. Jennings Ran do.ph or a similar measure authorizing expenditure of \$1 .-000.000 000 in 10 yr as federal aid to local airport projects. bill mostly small fields for private and non-scheduled commercial aviation CAA is proposing a master airport plan which parallels the Randolph

in Washington by powerful administration of American them not to the States which an unprecedented domestic they fear would spend too transport expansion, in the

Coming Up

Dec 46: SAE National Air Cargo Meeting Hotel Knick-bocker, Chicago

Dec. 5-7 Aviation Distributors & Man facturers Assu. Second Annual Meeting National Aviation Trades Assu Annua, Convention, and Aviation Writers Assu Board of Governors Meeting Hotel Jefferson, St. Louis Mo.

Dec. 11 ASME Industria. Con-servation Aviation & War Production Divisions Joint Meeting, Engineering Socie-lies' Building, 29 W 39th St. N. Y. C.

12 13. First California Aviation Conference, Holly-wood Roosevelt Hotal, Hol-lywood, Calif

Dec 13 Canadian Aircraft Troffic Managers Meeting, Montreal

Dec 17, IAS Wright Brothers Lecture, U S Chamber of Commerce Auditorium, Washington

Jan 8 12 SAE Annual Meet-ng & Engineer ng Display, Look Caciliae Here, De-

Jan 30 Feb. 1 IAS Thirteenth Annual Meeting, N Y C

4-6. SAE National Acto-n. if c Meeting Hotel New Yorker, N Y C

10 14 ACC4 Airplane Technical Committee (10 11) and National Al worthiness Re life pents (commit-tee (13 14), New Origins

(date to be announced): IAS Spring Meeting De-

May 16-17 SAE Nationa Die-sel Fuels & Labricants Meeting Hote. Carter, sel Fuels Meeting Ceveland

May 20-27 Pan American Air craft Exposition, Danas, Tex

ne 4-6° SAE National War Material Meeting, Rook-Cadillac Hotel, Detroit

much of it on smaller municipalities. Congress will be strongly influenced by whatever agreements may be reached prior to action on the

Wright Shapes CAA For Postwar

In order that CAA may meet The big cities, represented additional responsibilities-in



TRY THIS ONE FOR SIZE

Scale model-and mighty realistic, too-of Douglas DC-7 super transport ordered by Pan American for postwar international lines. Panam's order for 26 totals over \$40,000,000, or \$1,500,000 p us for each plane. Carrying 108 passengers and crew of 13, OC-7 will cruise at lobbles, want federal airport flag participation in the postover 300 mph and have max mum range of 5,000 m. Although details funds allocated directly to war world airline system, in have not been released craft is said to be seven times larger than DC-3, with wingspan "equal to height of 16-story building."

AVIATION, December, 1944

AVIATION, December, 1944

promising but difficult personal and non-scheduled aviation development, and in maintaining this country's leadership in both operations and manufacturing of aircraft-T. P Wright has made some new, arrangements in the Civil Aeronautics Administration. of which he recently became Administrator

Major operations services. Federal Airways, Safety Regulations, Standardization Center, Washington Airport, and Regional Administration, all remain under the direction of Charles Stanton, Deputy Administrator Foreign Operations are placed in charge of Al S. Koch, Assistant Administrator Bruce Uthus is director of the various phases of training, including that of foreign nationals, and continuation of the civil pilot training program, authorized by Congress. The over-all rearthree main services: Administrative, Operations, and Development.

More Comments Sought Re CAR Changes

gestions by many interested persons and organizations.

Probably the strongest and most revolutionary proposal received by CAB was from Joseph T. Geuting chairman of eph T. Geuting, chairman of the Personal Aircraft Council of the Aero Chamber The Council's proposal, in a nutshell, was that regulations of pilot certification be reduced to the enforceable minimum.

relatively as easy to get as ployed as a result of training drivers' licenses, the Council curtailment early this year has contended Likewise. it And now a statement issued wants aircraft manufacturers' by the War Department exresponsibility for design and plains that fewer than half of production placed on a level comparable with that of the automobile industry, the idea phase of AAF flying training to the content of the phase of AAF flying training to the content of the phase of AAF flying training to the content of the present of the phase of AAF flying training that the content of the present of the phase of AAF flying training that the content of the phase wants aircraft manufacturers by the War Department exautomobile industry, the idea phase of AAF flying training being that builders of air-

ernment, and some in avia- now employed by the airlines tion tion, do not want the certification of pilots and planes to have so much leeway. They think that an irresponsible person in an airplane is a greater menace than he is in an automobile, and they contend that it manufactured in a schools. It was the statement about "desponded in primary that the usual restrictions are still employed in primary that the usual restr tion and in aircraft producttotal 341, and 220 are workan automobile, and they con- contract schools. It was the that the usual restrictions are tend that if manufacturers unemployment of these large off of private flying. Flyers Canada has signed a 00-vr leage off of private flying. were free to build planes as numbers of skilled pilots that still are not permitted to go Lease covers only military oper-they wish, they would skimp finally forced the liquidation from outside the Zone to air-lations. Port is currently used



ONE FOR EVERY NEED

Here's how Aero Chamber would locate landing facilities for all types of flying in one of nation's larger communities. Dubbed in on actual photo are (A) airparks for persona flyers (B) flightstop, or intermediate landing area between cities, (C) air harbor, for water fitted rangement divides CAA into | craft, and (D) airport for scheduled air transport operations. (Wide after

> 'on materials and workman-of the WASP-Women's Aur-ship, with the result that con-force Service Pilots. scientious competitors would The War Department em-

The Board recently mailed out a proposed draft of amend-council's proposals and to those from other sources Their time next year

Status of Civil Instructors, Reservists Reported

instructors, 7,303 of 000 flight Pilots' certificates should be whom had become unem-

A total of 1.394 enlisted re-But many persons in gov- selective service, Reservists connections with U. S. avia-

be hurt, and that the reputa- phatically warns, however wit. Vastly important to indition of aviation in the pubtilat men in, committed to, or Arcraft Corp. for a Arcraft
vidual flyers and to the entire
private flying group is the new
CAB revision of Civil Air
about ready to send out a war's trend, and points out to advance aeronautical science
Regulations governing the arr Regulations governing the certification of pilots and aircraft.

The Board recently mailed

Second draft of its revised that transport pilot training will cease Dec. 31, and that no many persons and groups.

Service pilot applicants have ATSC, new streamlined set up

Officials said they had given been accepted since Sept. 30

Combining functions of buying supervising production of supervising productions of supervising production of supervising productions of supervising production of supervising productions of supervising production of supervision productions of supervision productions of supervision production productions of supervision productions of supervision produ

Report WTS Settlementa

will not become law till some day. L. W. Lawrence, chairman of the Board, has worked out a settlement procedure which, his announcement says, is satisfactory to 75 contractors who had been settled with late in October Theorem 15 and 15 per pared by Reginald M C.eveland late in October. These 75 had AAF has completed inter- entered claims for \$3,500,000. Three new civit air attaches and that a lot of "musts" be views with 10,314 civilian which were settled for \$1,600.

Begin 4th IAT Program

planes want them to be safe just as much as the government does.

A total of 1.394 enlisted revided as follows: 19 pilots, 37 mechanics, 35 technicians, and 37 internees for on-the-job connections with II. S. avia-

ports within the Zone, or vice versa. In other words, no unchecked flying is permitted on the Pacific Coast

On the East Coast, where enemy activity is considered much less likely, the Army seemed about to lift the ban at this writing, but was being cautious about it.

* SPOT CHECKING *

Nationwide survey by Bend a Avlation shows that 807 out of Aviation shows that 307 out of 455 colleges and universities replying plan to give postwar aviation courses, but most all said they would need government-owned aircraft, Responses showed 237 colleges now teach some phase of aviation, 219 of which will continue or expand curricula, and 95 out of 140 not now teaching aviation are paid now teaching aviation are pair

and regulations of its Aeronautics Commission, promungated after two pulic hearings is said to eliminate heada, he of duplicate authority, since interstate operations are left up to CAA Outside Chicago all supports are accused by the state

Institute of Aeronautical Sciences is reciplent of gifts totaling \$184.800 mide by Con vil, Robe Abertal temp So ar

Piper has issued new profuse.

have been ordered abroad by State Department. They are Ogden Pierrot. Lisbon and Ma-drid Holard B Railey Paris and Charles M Howen. Jr Ric

was Nov. 15. The group is di- private hangar as integral part


CANADIAN NOTES *

By James Montagnes

MAGNESIUM'S MODERN MATHEMATICS

+15% - 74% = 100%

Revere Magnesium Alloys

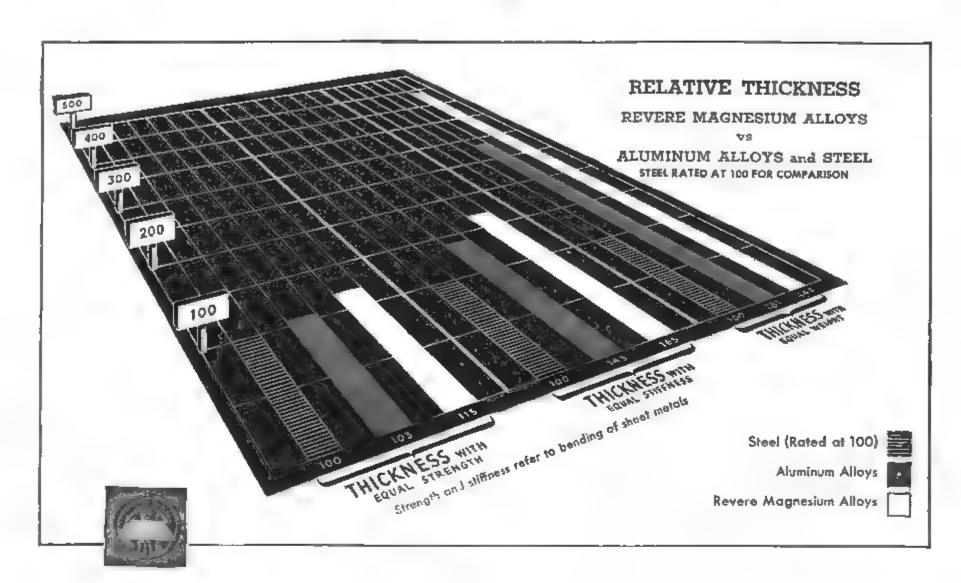

TF you have a product whose weight you would Like to cut drastically without sacrificing strength or rigidity, consider the simple mathematics of magnesium. Suppose it is a tank you are concerned about, a tank for oil or gasoline on a truck, a plane, or on some other equipment where weight-saving would be important.

Such a tank, if made of Revere Magnesium Alloys, would be 74% lighter than one made of steel. Its walls would be only 15% thicker and they would be as strong as steel. Stiffness equal to steel would require walls only 65% thicker, and you would still have a tank 63% lighter than steel. You can have equal or greater strength and stiffness and still save weight.

Remember that adoption of Revere Magnesium

AVIATION, December, 1944

Alloys means economy, not only to the user of the finished product because of light weight, but marked economy to you in handling, manufacturing and shipping. The Revere Technical Advisory Service will aid you in realizing those savings.

Send for your complimentary copy of the new 32-page booklet, "Revere Magnesium Alloys and the Light Metals Era."



MAGNESIUM-ALUMINUM DIVISION

Founded by Paul Revere in 1801

Executive Offices: 230 Park Avenue, New York 17, N.Y.



WINGED FOR VICTORY by Fairchild

On wings built by Fairchild, the Navy's hig patrol bombers-Martin PBM-3 Mariners-fly to war over the seven seas.

They've sent many a submarine to the bottom. They soar by the hundred over icy arctic waters; patrol the far reaches of the Pacific; carry bombs and munitions, cargo and men to combat on distant naval fronts. .

Behind their constantly increasing numbers is the story of industrial America at war-the story of American vision, enterprise, initiative and cooperation combining to accomplish the "impossible".

Three years ago there was a critical need for these big flying boats. Fairchild undertook the job of building the vital wing panels despite the fact that Fairchild had just launched a heavy production schedule, building famous Cornell primary trainers for the Army Air Forces, and manufacturing other Fairchild-designed aircraft.

In this day of industrial miracles, this Fairchild accomplishment stands as another example of the job that can be done with cooperation, technical knowledge and production skill.

BJY U. S. WAR SONDS AND STAMPS



Division of Fairchild Engine & Airplane Corporation, Hagerstown, Maryland Burlington, North Carolina

by British United States, and Canad an air forces, operator be-ing RCAF.

in what was claimed as an aviation first, an autogire at Baker field, Toronto, recent, towed a gilder on short flights

Plans to build 200 garstrips Plans to build 100 airstrips throughout Canada at municipalities with populitions over 2000 were outlined recently by Russell L. Gibson president of Cub Alreraft of Canada Ltd Humilton, Ont Called for are strips up to \$,000-ft. long and 200-ft. wide.

Victory Aircraft, Toronto, has now turned out its first York, transport version of Lancaster

Munitions & Supply Minister C D. Howe has now been ap pointed Minister of Reconstruction, a new government depart-ment. Meanwhile he continues administration of Dominion civil

RCAF has stopped recruiting, and 4,200 aircrew trainees have been released "First in first out" is postey of discharges. About a third of the RCAF is expected to take part in the war against Japan with transfer to Pacific theater being on voluntary basis.

Production and cost figures on aircraft produced in Canada since the start of the war have been re-ensed at Ottawa to the end of 1913. A total of 10,517 aircraft with a we ght of 21,882 short tons without their engines, was produced and cost with overhaul at various times totaled \$75,000,000

By F H Fullerton

New Canadian company is Acro Caterers, Ltd., recently incorporated with paid-up capital of \$65,000 Described as firm engiging in airport restautant operation company has Outario headquarters at Canada Rall 8. y News to 475 Union Station Torocto and British Columbia headquarters with same company t National Railway Station, Vancouver,

OBITUARY

Maj. Gen. Waiter R. Weaver, retired. Graduating from West Point in 1908, he then served in various military capacities. last being as head of AAF Tech-nical Training Command Fol-lowing his retrement shorts



FIREFLY THAT FOLOS

Close-up of Fairey Firefly fighter-reconnaissance plane designed for carrier-based operations. Carrying crew of two, it has cameras in addition to armament of four 20-mm, cannon. Craft appears to be development of Fairey Fulmar, with principal difference lying in armament and new Rolls Royce Griffon engine. (Press Association photo)

AMERICA AT WAR

Aviation's Communique No. 36

which strategic and tactical levels. aviation is piling on enemy On the German front, oper-

the hitting power of heavy ar- so long

war works and operations is ations of Lt. Gen L. H. Brere- Singapore. satisfactory, but the amount ton's Allied Airborne Army of it the enemy is taking while are rated highly successful, still going strong is a surprise indicating that more damag- planes of U S. forces, recently and a disappointment to most ing inside jobs will be done on hit Formosa. American fleet military commanders. This the Nazis by air troops. Air victories at the Philippines deficit is more than offset Chief Marshal Leigh-Mallory which dropped Japan to a however, by the effectiveness asserts the Luftwaffe is using third or fourth rate naval of seaborne aviation, which its full power, and has noth- power, evidently used a prenow constitutes the major ing in reserve. Gen H. H. Ar. ponderance of aviation to do striking power of the Navy nold, AAF Chief, believes that the job, knocking off enemy Prospects for airpower in Allied bombing of German air- battleships, lighter craft, and new equipment, and new strat- plane factories has cut pro- stx airplane carriers more egy and tactics appear unlim- duction to 800 units per mo than 60 ships in all M lo Burcham, chief p.lot. Lock heed Alreraft Corp. He joined Lickheed in 1937 as ferry pilot, later headed flight testing at company's Liverpool div S.b. sequently he was engaged in engineering flight testing at Burbanh, and was annotated their p.lot early in '44 He also detectored and conducted special training course for 4th Air Force pilots.

egy and tactics appear tuning-ited, Chiefly foreseen is fullulation to ood units per line ited. Chiefly foreseen is fullulation to obtain the Allies recently working out of other than Chiefly foreseen is fullulation to obtain the Allies recently working out of other than Chiefly foreseen is fullulation to obtain the Allies recently working out of other than Chiefly foreseen weapon is the airborne rocket, tions on a scale which many which, when its accuracy is authorities would have judged altitude without fighting improved, will give aviation the enemy could not endure

Thomas Midgley, Jr., inventor pacity of aircraft so that all addition of striking power to forces out of lost positions, the of Midgley indicator and ethal war strategy and logistics can such planes as the North resulting concentrations in

American P-51, Lockheed P-38, Republic P-47, and with the advent of the Northrop P-61 Black Widow night fighter, and of the Douglas A-26 Invader. The new P-75 has been taken out of production because these other airplanes are giving the desired results

Britain's Hawker Tempest ighter, successor to the Hurricane and Typhoon, knocked down more than 600 V-1 flying bombs and is now after the Nazi jet Messerschmitt 262. Incidentally, German jet planes fly and climb fast, but they do not turn well. The press reports that a P-38 photoplane outmaneuvered an Me-262 RAF announces a new faster Spitfire, changed from Merlin power to the Griffon 65, with 23 percent more cylinder displacement, and twostage supercharging North American Aviation is working About a third of the RCAF is expected to take part in the war against Japan with transfer to Pacific theater being on voluntary basis.

Raiph P. Beil, director-general of alteraft production for Canada, has resigned with the completion of the training air production program, and the functions of the aircraft production program, and the functions of the aircraft production branch of the Deartment of Munitions & Suppartment on bomber and fighter designs

Russia will jump Nippon when the time comes, or at least give the Allies the bases from which to jump. The Japs played their sea power hand for the Philippines, and lost, which means that Allied na-The amount of devastation be revised to unheard-of vies and armies in the Philippines will soon isolate the entire Netherlands empire and

> The greatest air fleet ever massed in the Pacific, 1,000

ranges Another promising air production and communica- They have been able to reconnoiter the Jap mainland at

Though the Japs have lost over 3,000 airplanes in four tillery, with many times the Trend continues toward com- months, they probably are speed and range. Not least is bining characteristics of dive- more than replacing losses, after inactivation of the command he was consultant to Aviation Corp In Dec. '43, he was awarded DSC speed and range. Not least is bining characteristics of dive-more than replacing losses, bomber, low level bomber and the quality of their new ground strafer, and fighter, in may stretch the range and ca-one simplems, with constant own. As there will their new may stretch the range and ca- one airplane, with constant own As they pull their air

AVIATION. December, 1944



108 Series - over 3000 Sizes - a NORMA-HOFFMANN PRE-CISION BEARING for every load, speed and duty in aircraft service.

Write for the Catalog Let our engineers work with you Or, let one of our Field Enameers call

In 1940—an interesting but promising experiment. In 1944—a recognized success—accepted by the U. S. Army and Navy, the U. S. Coast Guard, and the British Royal Navy-proved by actual service tests from the Arctic to the Tropics—in rescue work at sea—in transporting blood plasma—in evacuating personnel from inaccessible points.

NORMA-HOFFMANN PRECISION BEARINGS proudly participate in its achievements.

TO WIN THE WAR WORK-FIGHT-BUY WAR SAVINGS BONDS!

MORMA-HOFFMANN BEARINGS CORP'N. STAMFORD, CONN. Founded 1915

Field Offices: NEW YORK + CHICAGO + CLEVELAND + CINCINNATI + PITTSBURGH + DETROIT + LOS ANGELES + SAN FRANCISCO + SEATTLE, WASH.

AVIATION, December 1944

stronger and tougher

Accomplished and coming A total of 46,000,000 lb. of weapons and supplies were flown over the Hump to China by ATC in one recent month Navy is turning over some air—

Mark Committee Hardisk, formerly folder presentative of Republic twiation barmingdale L. in the teen named gen group of D. A. Comstock & Co. Sc. Norwalls, Conn. maker of B-29 engine covers. plane carriers to the Marines, who will use Vought F4U's on John M. Cook fills newly created their decks.

* CALLING NAMES *

T F Wright, CAA administ a-tor will give Wilbur Wright Memorial Lecture before Royal Aero Society next May.

Harry P. Kupiec, formerly with Glenn L. Martin now herds Air Associates hydraulics div

Robert Crabb, eastern sales acaded to John A. Collings op. Bendix Aviation Corp ticke press of transportation Piclic div, has been made country-wide fleid engineer with F. T. Sterling has been made

Japan and China will be D H Roberts at med pestronger and tougher

gine covers

position of advertising manager if the C. Wesley Archbold, it merly of supply and service in ATC is named director of hight meas.

George W Mitchell comes to AB as tax consultant and di-rector of special study of multi-mentantion which has deer lered by Congress. He is or the from Federal Reserve Pink Chicago, where he serves as tax economist.

Glenn L. Martin now herds Air Associates hydraulics div

Joseph D. Boyian is new regional cational set-up results in appointment of four new regional pointment of four new regional managers. Named are W. F. McGrath, gen. mgr eastern region, C. E. McCollium, gen. mgr central Chicago, W. N. Gor ham, gen mgr midwestern Kansas City, and J. S. Bartles. George E. S. ye secomes publicity rep. of P. & W. div. Ceeeding Benham

Robert Crabb, eastern spies application of traffic dept under an sportation dept., which is the property of transportation of transportation in the property of transportation of transportation in the property of the property of transportation in the property of th

A Hollywood as main office

Kenneth Fletcher, formerly with Boll public relations, is now with Boston Area ATSC

5 J Miller, becomes PCA chief pant maintenance

Frank E Ross is new asst in Western Region office of Air chaft Manufacturer's Council and parent ACCA. He will bely coordinate industry reconversion surplus materials disposal, transition problems

F. T. Sterling has been made set inanger of contracts d.pt (Cur., ss Wright's St Louis plant New assignments in sules promotion dert went to G. Summer reland, castern representative, now at Rockeft ler and the set in the set of G. Tray's and R. F. Wolford, both the set of Air chaft Manufacturer's Council and parent ACCA. He will bely coordinate industry reconversion surplus materials disposal, transition problems

G. O. Wiggin becomes the set of Cur., see than near the contracts d.pt (Cur., see Wright's St. Louis plant. New assignments in sules promotion dert went to see nelative, now at Rockeft ler than and C. K. Tray's and R. F. Wolford, both the St. Louis plant.

A N. Kemp, press of AA, has been elected a director of Chase value and the second plant. The second plant is the second plant. New assignments in sules promotion dert went to second plant. New assignments in sules promotion dert went to second plant. New assignments in sules promotion dert went to second plant. New assignments in sules promotion dert went to second plant. New assignments in sules promotion dert went to second plant. New assignments in sules promotion dert went to second plant. New assignments in sules promotion dert went to second plant. New assignments in sules promotion dert went to second plant. New assignments in sules promotion dert went to second plant. New assignments in sules promotion dert went to second plant. New assignments in sules promotion dert went to second plant. New assignments in sules promotion dert went to second plant. New assignments in sules promotion dert went to second plant. New assignments in sules promotion dert went to second plant. New assignments i

Wi s Kropp joins Aircraft Parts I evelopment Corp Summit V J as industrial design engineer and stylist

G O. Wiggin becomes asst. gen mer of ACCA to mesh activities of cight committees of Aircriff manufacturers Council and assist in management of chamber's service depts.

J. S. Farra becomes customer service manager for Douglas at general office, Santa Monica



By BLAINE STUBBLEFIELD



Military air transport services in the Pacific will take on importance and intensified activities as war pressure shifts to Japan Some of the Atlantic and Southern services may be terminated earlier than others.

If the war lasts long enough you will see some new airplanes designed around tanks, field guns, bulldozers, tractors. These planes will have to carry up to 80,000 Ib in addition to fue, crew, arms

Rapid development of troop carrier operations put more AAF men in line to stay in the war along with walking soldiers till the last Jap surrenders


As the time approaches for renewal of battle over revision of civil air law it becomes apparent that all who use airplanes are not brothers under the skin Legislators and administrators may have to recognize further the need of special consideration for air transport private flying and other branches.

Some there were win said the Russians as our elecon approached, became impressed with the possibility of Republican victory and for that reason stepped out of the international air conference, they are supposed to have thought defeat of the Administration would mean repudiation of American foreign policy

Aeronoutical oracles are already busy speculating on American representatives on the proposed international aviation commission You can list E. P. Warner, T. P. Wright and Jerome C Hunsaker as good bets for the technical chair. Don't bet on the policy candidates.

Few people reglixe that the Navy as now composed of swift, long-winded task forces built around airplane carriers is a completely new kind of weapon almost an air weapon-and that there is nothing else like it or by any means comparable to it in the world You can go on from there with your own conclusions

A big question in Washington is whether the public will back up Army and Navy in a strong research and development program in peacetime-that is, a program which will continue anything like the present rate of advance in air, ground, and sea warfare. Nothing could beat such a research operation, with U S. industry standing behind it, and it would be cheap. Your best guess is that it won t be done

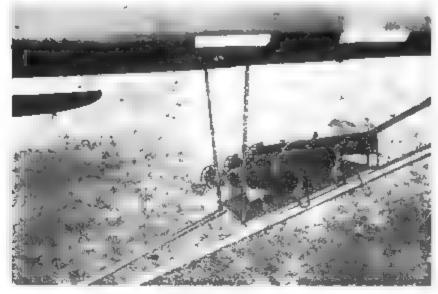

WRAT, NO PARATROOPS TOO?

Army's liaison planes, mostly Cubs. have one served with top efficiency as eyes of artillery, doubling as supply and casualty evacuation planes whenever necessary—but always without armament. Now, however, they're punching on European Front as well as seeing, with batteries of three rockets mounted on wing struts. Rockets can be fired singly or in salvo. (Press Association photo)

A. C. Streamer, vice press of Westinghouse Liecture & Might control office.

A. C. Streamer, vice press of Westinghouse Liecture & Might control office.

A. C. Streamer, vice press of Westinghouse Liecture & Might control office.

Action in hight control of in hight control office.

Action in hight control of in hight control of in hight control o

James C. De Long, forr er's idvertising director of General table Corp., has been appointed director of advertising for TWA with headquarters in Kansas City, Mo

JE White is noted saids on street is not the rest of his gineering representative of stones district traffic our Kropp Aviation Forge to fir Pan Antonio Jay M Jack conthern part of III with his son is new assist to general country at Rockford

Dave Gatch, supervisor of pas-senger service for CAL in Den-ver becomes senior dispatch clerk in hight control office.

AVIATION, December, 1944

Aviation Manufacturing

WPB Reports Plane Production by Types; Grand-Total Output Since 1940 is 232,403

. . . Reconversion, termination in changing perspective of the National Advisory Com- ceiving great impetus from . . OCS takes fourth step to speed settlements . . . mittee for Aeronautics Copter weed-out foreseen . . . Orders for cirliners This will call for a great contend the light planes, mount . . . Vari-pitch for light job? . . . Meeting on deal of talent (not to speak of pitched for highest efficiency engine policy . . . Uniformity mission goes to Britain courage) and engineers who pitched for highest efficiency

For the first time, the WPB demobilization cannot Since July, 1940: Bombers Europe, 74,963; fighters 70,627; trans- The President, and many to be dealt with. Vibration a grand total of 232,403

Unit production in October remobilization plan. was 7,429, a slight drop from the 7,598 acceptances in September-and a considerable drop from the all-war high of 9,118 in March. Total airframe a matter of more concern a helicopter. weight, exclusive of spares, than reconversion, so long as was 75,400,000 lb. in October, the war lasts, because thoua drop from the 78,945,000-lb. sands of war contracts, and figure of September

The decline is due to design being terminated now changes, emphasis on heavy bombers, and contract cut-

Reconversion, Termination In Changing Perspective

War industry reconversion and contract termination are buy government-owned equipsubjects that have to be folment he is using, or have it subjects that have to be folment he is using, or have it subjects that have to be folment he is using, or have it subjects that have to be folment he is using, or have it subjects that have to be folment he is using, or have it subjects that have to be folment he is using, or have it subjects that have to be folment he is using, or have it subjects that have to be folment he is using, or have it subjects that have to be folment he is using, or have it subjects that have to be folment he is using, or have it subjects that have to be folment he is using, or have it subjects that have to be folment he is using, or have it subjects that have to be folment he is using, or have it subjects that have to be folment he is using, or have it subjects that have to be folment he is using, or have it subjects that have to be folment he is using, or have it subjects that have to be folment he is using the folment he is used the folment h lowed almost from day to day removed within 60 days after for 16 Curtiss-Wright C-W practices, and materials in to be understood, Congress request, except when he needs 20's, commercial version of an effort to bring about unihas passed the Demobilization it for other war jobs. Act of 1944, the President Has signed it, and the WPB with T-loans (termination), its formula formity for the American and British aircraft industries.

WPB is all set to go into reverse, from war mobilization to demobilization. But just as the war mobilization plan did. not work too effectively until sions of the helicopter than

has released warplane produc- planned down to precise de- ress has been made, in Mr cause of the many available tion in a breakdown by types, tails till peace comes in Loening's opinion, but several long runways,

port 17,592; naval reconnais- Congressmen, have been dis- must be reduced; speed must sance 2,345; trainers 54,642, satisfied with the law, and be increased; control must be gine companies, comprising communications 10.785; spe- Capitol Hill may make further simplified; and production the Engine Technical Comcial purpose 1,459 That makes changes. Probably there will costs must be lowered. be an aviation division of the Mr. Loening is in a position recently met with military of


OCS Takes Fourth Step To Speed Settlements

many airplane contracts, are

The Office of Contract Setbacks. More, and drastic, stop fourth step to hurry termina- placed about two months ago This meeting was called by orders are expected as Allied tion settlements so manufacforces score new successes at turers can get onto other war Douglas DC-4 and DC-6 types. Joint chief of staff of Army obs or prepare for postwar sued by Robert H. Hinckley DC-7's, and American Export Uniformity Mission in Britain head of OCS, gives the con- is expressing interest in the tractor the choice either to DC-4's and DC-6's. Nationa'

has signed it, and the WPB with T-loans (termination), ing for C-W 20's also, and for has announced its V-E Day plans, under the law with T-loans (termination DC-4's assigning about \$25 plans, under the law Dc. alms. and pre-termination conducted by Flight Lieut. D. G. Mollitt, RAF of calms, and pre-termination 000,000 to both types. Meanagreements

There seem to be more ver- ditional 15 of the 6's. the war actually started, so there were of the basic air-

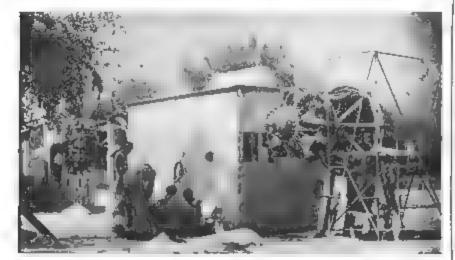

'NEATH SHADE OF OLD OLIVE TREE

AAF unit in North Africa uses portable engine test stands and cell no controls whatever. Cost is plant will be closed at end of developed by Jacobson & Co. Two engines may be checked up simul put at about \$200 in the 65-11h.s year taneously, and sound-proofed test house has equipment set ups similar to those used in permanent installations.

plane in early development | Engineers expect that these stages and a long weeding- weights and prices will be out process is ahead says greatly reduced through de-Grover Loening, chairman of sign shortcuts and mass pro-

have it should be encouraged at top cruising speed, can alvery difficult problems remain

to have all inside information ficials in Washington to dison helicopters. One observer recently was heard to wise-| crack that a person still needs Termination of contracts is five hands and six feet to fly

for postwar plane deliveries ing technical requirements; now amount to about \$100 - and the importance of elim-000.000. The first \$50,000.000 inating separate service retlement has now taken a worth of contracts were quirements wherever possible. Since then, Pan American and Navy work Regulation No. 4, is- Airways has ordered some time United, which initially the British Air Commission,

variable pitch propellers in 1943 postwar light airplanes. A half dozen manufacturers have plans for producing various types of pitch-control hubs, and others will be in the Order for 1,000 more B 29 Sup

York, is producing a two-po- New Manual on contract tersition pitch hub in large quantity for Army liaison planes. Jack & Helntz for use of its This hub, stated to weigh no more than a plain fixed-pitch Cutbacks in steel landing mat unit, is reported to cost about orders exceeding \$20,000,000 and \$1,25 per horsepower, Further, Bartlett Hayward, of Baltine plants will be affected more, producing for the armed services is turning out the Hamilton Standard Propolers only fully automatic hub, with has announced Pawtucket, R L. 90 hp. range, and weight at Report containing composite about 25 lb.

the helicopter subcommittee duction, both of which are rethe war. Some manufacturers be he believes. Very rapid prog- ready take off all right be-

Meeting on Engine Policy

mittee of the Aero Chamber, cuss clarification and interpretation of military service policies governing the design, procurement, and development of sircraft engines: de-Orders for Airliners Mount tors' responsibility under the termination of the contrac-Accumulating airline orders varying provisions of chang-

Aircraft industry techni-

'Copter Weed Out Foreseen ordered 15 DC-4's and 20 and members represent the DC-6's, has called for an ad- National Aircraft Standards Committee and the Society of Automotive Engineers They Vari-Pitch for Light Jobs? are returning a visit made to the United States by a British Interest is building up for technical mission in May,

* ASSEMBLY LINES *

Diamoloy Tool Co., of New by Soeing Aircraft Co., Seattle

Thirty Chinese engineers will receive year's training in production work and specialized builtary and naval alreraft since the production work and specialized builtary and naval alreraft since the production of a total of 25,000 duction work and specialized builtary and naval alreraft since the production of a total of 25,000 duction work and specialized builtary and naval alreraft since the production of a total of 25,000 duction with the production of a total of 25,000 duction with the production of a total of 25,000 duction with the production of a total of 25,000 duction work and specialized builtary and naval alreraft since the production of a total of 25,000 duction work and specialized builtary and naval alreraft since the production of a total of 25,000 duction work and specialized builtary and naval alreraft since the production of a total of 25,000 duction work and specialized builtary and naval alreraft since the production of the production work and specialized builtary and naval alreraft since the production of the production work and specialized builtary and production work are producted by the production of the production work and specialized builtary and production of the production occupations at Lycoming Div of Aviation Corp., Williamsport, Pa., under agreement providing for licensing for manufacture, assembly and sale, in China, of Lycoming engines and parts.

Jet propulsion units are to be produced by Allison Div. of General Motors Corp., shortly after beginning of new year, in cooperation with ATSC and the General Electric Co. New tagged test cells, which with tools and other items is covered by Defense Plant Corp., commitment for \$12,500 Corp. commitment for \$12,500,

All North American P-51 service orders are now being filled by Koleman instrument Div. of North American's Daliss plant. Square D Co. announces appropriate of Inter-City Avis.

Buick Div. of General Motors has completed 60,000th P & W Twin Wanp engine. New company achedule land down by AAP provides for two new engines—one for Liberator bo ni er, other for C-64 Douglas transport.

For 30-month pariod ending Sept. 30, '44, over 51,000 P & W engines Ware produced by Chevrolet Motor Div of General Motors Corp. And meanwhile Chevrolet-Anderson plant, And. General Electric Co. announces the control of forged aluminum alloy cylinder heads for new R-2800-C 18-cyl. P & W engines used on Republic P 47 s and Northwest Airlines has appointed Newell-Emmett Co., N C., to handle company's advertising account.

C. M. Giansini & Co., 161 E.
California St., Pasadena 5.
Calif. has taken over manufacture of instruments for Auto-Eight Corp., Burbank, Calif.

General Electric Co. announces parts.

General Electric Co. announces parts in charge is J. C Malugen

Missouri Aviation Corp. has been named agent for distribution of sovernment excess hardware parts.

Tru-Punch Co., precision transfer and north central Texas.

Adel Precision Products Corp pans to open new sales offices to Chicago-Latrobe Twat Orill Works has opened branch ware to parts a fine charge is J. C Malugen

Chicago-Latrobe Twat Orill Works has opened branch ware to parts a fine charge is J. C Malugen

Missouri Aviation Corp. has been named agent for distribution of sovernment excess hardware parts, and special accessories An estimated 35 to 60 carloads of supplies with the part of supplies and sales office at 1043 and 1044 and 1044

troop-carrying gliders has been awarded by AAF to Ford Manu-facture will be at Iron Mountain Mich., plant. Company reports it has produced over \$2,000 turbosuperchargers, also says total man-hours per unit were reduced from approximately 610 (first month) to 149.

Chartee for Z,000 additional charge.

Chartee Carrying gliders has been with charge.

W ckwire Spencer Steel Co.'s general sales offices of Spring & Formed Wire Div and of Automotiva Div are now located at New Bond St. Worcester Mass. District sales office for these divisions will continue at 100 Fifth Ave., N. Y C., 18.

To Ryan Aeronautical Co. has gone additional \$40.004,000 Navy chased building at \$41 Behan States Gummed Paper Co of Chicago.

States States All utility of Chicago.

States G

further survey by Operating for other companies.

Committee on Aircraft Materials
Conservation, in response to requests by aircraft contractors
Copies may be obtained from committee. Room 1019 Navy
Bidg, Wash., 25, D. C.

Over 1,000,000 hp is represented in engines and power sections built in October at Kansas
City plant of Fratt & Whitney
Aircraft Corp. of Missour..

tems and aircraft assemblies
for other companies.

Wright Feid continues its experimentation with American-duplicated robombs of V-1 type
Jack & Heintz worked out direction control for our robot, Ford made impulse engines, Republic has supplied airframes and assemblies in Cotober at Kansas
City plant of Fratt & Whitney
Aircraft Corp. of Missour..

The 5,000th Cyclone 18 has been produced at Wright Aeronautical Corp's Wood-Ridge, N. J., plant, in operation 22 months. Also first of 16 new test cells, able to accommodate engines up to 4,000 hp., was opened at this plant for testing 3,200-hp. Cyclone's for Boeing B 29's Further, company's Lockland (Cincinnati) plant has completed Cincinnati) plant has completed to 50,000th 14 cyl. Cyclone.

Thirty Chinasa angineers will Ford announces passing of 8,000


military and naval alreraft since Pearl Harbor was announced by Pearl Harbor was annually consolidated Vultee late last month. This amount was figured to be 11 percent by number and 16 percent by weight of all aircraft produced in the U.S. in that period. In add.

* FOR THE RECORD *

North American's Dalias plant.

Since Pearl Harbor, more than 75,000 radio compasses have been delivered to Allied forces by Bendix Radio Div Recent peak month's production was more than 5,000 units.

Ko leman instrument Div. of Square D Co. announces appointment of Inter City Avia-lion, East Boston, Mass, and Northwest Air Service, Seattle, Wash., and Fairbanks, Alaska, as additional distributors for postwar sales of company's instruments.

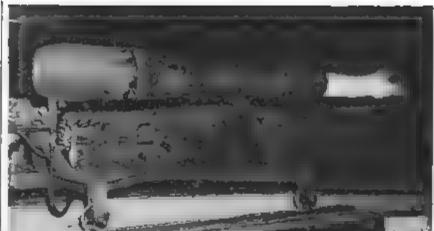

GOING NAZIS ONE BETTER

Impulse jet engine, for powering American-made robot bomb, being tested at Ford plant. Using parts of shot-down buzz bomb, Ford englneers cooperated with ATSC power plant technicians to come up, in very short time, with this Yank version said to be superior in many respects to or ginal German model.

Sheldon Machine Co., Chicago bunder of precision lathes a darbor presses has now acquired vernon line of machine tools formerly built and sold by Machinery Mfg. Co., Los Angeles aircraft.

Teports

Teports

Teports

Teports

Telegraph

The Machine Co., Chicago bunder of precision lathes a darbor presses has now acquired vernon line of machine tools formerly built and sold by Machinery Mfg. Co., Los Angeles been transferred from the N. Y. C. office to become manager of the new division. His duties work.

Tocco Div, Ohio Crankshaft Co, Cleveland, has completed has broken gound for a wonew high frequency induction experimental lab having 24 test heating stations supplied by 2,000 kw., with frequency range varying from 960 to 1,000,000 percent. evelas

Young Radiator Co., designers and manufacturers of heating cooling, and air conditioning products, announces appointment of Rodgers Engineering Co. Dallas as sales and engineering representative in north east and north central Texas.

Clark Reed

Brooks Equipment Corp., N. y.
Connounces it has opened thicago office at 1 N. La Sale St. under direction of 1 K.
Grindle Company makes bandonerated remore controls used in aviation industry.

Monesota Mining & Mfg. Co., St. Paul has acquired Mid States Gummed Paper Co. of Chicago.

For hidden rivet respection, a Mining to direct remove the service of the service of

OeVilbis has in well its Cincinnati district sales head-quarters to larger premises at 410 American Bidg. Central Parkway and Walnut St.

* KNOW-HOWS *

instrument for continuous daylight reasurement and recording of cond centings has been developed by General Electric Co. and U.S. Weather Bircau Reflecting 100 eye.o. purating beam from clouds to 'Celiometer' 1,000 ft away, device enables consistently accurate recordings to be made automaticordings to be made automati-

Construction under Convair's new \$25,000 000 Navy Liberator contract is to begin about May '46, after completion of present commitments.

General Electric Co. announces purchase of site in Anaheim, Caif for postwar plant to manufacture airplane plastic parts. And special accessories hardware parts. And special accessories hardware parts. And special accessories hardware parts. An estimated 35 to 60 carloads of stepl. F & wengines for punch supplier, formerly of Scotch Plains, N. J., a now located at Roseville Station Newark 7, N. J.

Construction under Convair's new \$25,000 000 Navy Liberator contract is to begin about May '46, after completion of present commitments.

Contract for 2,000 additional troop-carrying gliders has been contract for part of distribution of distribution of distribution

When you've got to pull out of a glide... you can count on your LYCOMING



"Coming in to land. All set for altitude and direction. Throttle back and glide."



"Nose down. Pick your spot. Glide. Whoa! Overshot ... Give her the gun!"



"Feel that Lycoming catch hold! Right on the trigger . . . cleared that obstacle like a bird,"

AT no time is it more vitally important that your engine function correctly than when you give it full throttle after a glide. Then you must have power and have it fast and without fail.

And Lycoming fuel distribution is specially designed to give it to you. Here's why. The center zone induction system, immersed in a perpetual bath of hot oil, provides better vaporization of the fuel and uniform distribution to all the cylinders.

LYCOMING


AIRCRAFT ENGINES ... 55-300 H.P.



Lycoming Division The Aviation Corporation

Dept. D-3, Williamsport, Pa.

POWERED BY LYCOMING - THE ENGINE WITH A PROVEN PAST AND A SURE FUTURE



LYCOMING, MODEL 0-145, developing 65 h.p. at 2550 rpm.

Weight - only 165 lbs., 7-10% less than competitive engines.

Gas consumption - 212 3 gals, per hour, 19-32% saving over competitive engines.

Among aircraft "Powered by Lycoming" are: Aeronca, Beechcraft, Bellanca, Boeing, Cessna, Curtiss, Luscombe, Piper, Spartan, Stinson, Taylorcraft, Vultee.

Let Lycoming power your aircraft.

Transport Aviation

Air Problems Smoothed at Chicago Parley; **Growing Favor Shown for American Plan**

. Hearings on North Atlantic applications com. ures where no such service commercia, traffic as soon as pleted . . Priority possengers, corgo outhorized existed, but that even then the airlines are ready to take on ATC, NATS . . . See cirlines seen creating much air cargo will remain a tiny it new traffic . . . Factors in Panagra petition for fraction of merchant marine entry into U. S.

start the International Civil were checked in the Atlantic

and rates and latter, with on the Board to hurry its de- United States. wide backing insisting on cisions. free competition under organization restricted to advisory, consultative, and technical work (also see pages 115 and

and observers, who pointed ican Merchant Marine Council that the Soviet, being cil. opined that much air one of the three great powers business will be created by and having vast commercial the characteristics of air develop in overseas services, and need for experiments are than be dispersed at 235 343 mph. speed ing a large, self-contained that becrease in international air for an indefinite period. Mililarge, self-contained travel; that it will be primarcountry she may not have ity, but not exclusively, paslarge an indefinite period. Mililarge, self-contained travel; that it will be primartary transport has been hanlily, but not exclusively, paslily, but not exclusively, some venrs. They also pointed out that neither Britain nor the U S need traverse Russian soil to reach major objectives.

Russia's geographical posttion is aeronautically unique; her airlines could reach into China, many Asiatic and European countries, and the U S through bilateral agreements.

Hearings on North Atlantic Applications Completed

Most important of the Civil Aeronautics Board's consolidated hearings on oversea applications—those covering the North Atlantic group-were completed last month. Hearings on the Hawaiian and Latin American groups of applications, both characterized

After a discouragingly slow Eleven airline applications

Sea Airlines Seen Creating Much New Traffic

their respective governments, prewar steamship figures. Dr tificated in Latin America Russia's non-participation E P. Warner, CAB vice chairdisappointed most officials man, addressing the Amer-

sideration and reservations. Dr. Warner also said that he ing ATC and NATS to carry Navy contracts with PAA and even though absent. Others, anticipates a very large in-priority passengers and cargo AEA for trans-Atlantic flights however maintained that be- crease in international air for an indefinite period. Mill- are baing

cargo will increase ten times Executive Order simply makes prewar volume on routes that official what was requested by already had good air service. CAB. The military services with correspondingly high fig- have agreed to stop carrying

* BASES & COURSES *

Factors in Panagra Petition Complete flying service for per

in CAB's own American flag Argentina, together with an with University of Georgia Major accomplishment was system will get favorable con-application for an extension An av ation ground school course the ironing out of principal sideration, other things being of its routes from Balboa, has been announced to I niver differences between Anglo-jequal. Several East Coast C. Z., to New York, This ap-sity of the covering CAP reg-Canadian and American dele- cities, especially New York, plication culminates a long and a review of essential math proposing world authority fication as transocean-line ter- Airways (which owns half of partial easing of restrictions on with regulatory powers over minals. Possibility of early Panagra stock) for the right sale of aeronystical charts has routes, schedule frequencies, peace in Europe puts pressure to petition for entry into the Sarvey begins sale of aeronystical charts has been afted as Coast & Goodetic Sarvey begins sale of charts to

eration of its claims, saying that foreign companies are already taking root in Latin Estimates by both govern- America, where the Germans At press time there was ment and airlines on postwar were forced out. The company every indication the American trans-Atlantic passenger traftherefore requests that it be port's new \$1,200,030 terminal plan would be that which fic have been criticized on allowed to expand, also asks eight airlines serving city are delegates would take home to the ground they are based on that no other operators be cer-

Priority Passengers, Cargo

ternal airlines, must have con- verted from surface carriers, sued a formal order authoriz-

Aviation Conference at Chigroup, varying widely in their
cago last month made what proposed European terminals
was considered excellent progand intermediate stops. Probress toward laying the founably those that follow to some
dation for a workable world extent the pattern laid down

The Entry Into U.S.

For Entry Into U.S.

Pan American-Grace Airways has presented to CAB a
plant to expand its services pects to pen an approved fly ng
dation for a workable world extent the pattern laid down
to complete my ng service for planes has been appropriate
by South extern Air service,
ways has presented to CAB a
plant to expand its services pects to pen an approved fly ng
dation for a workable world extent the pattern laid down
between the Canal Zone and service for planes has been appropriate
by South extern Air service,
ways has presented to CAB a
plane bas been appropriate
by South extern Air service,
for Entry Into U.S.

Attact: sa, with opening of a
major of grating base at Athens
Ga aliport Company also
pects to pen an approved fly ng
dation for a workable world extent the pattern laid down
between the Canal Zone and service for pen approved by South extent Air service,
ways has presented to CAB a
plant to expand its services pects to pen an approved fly ng
dation for a workable world extent the pattern laid down
between the Canal Zone and service for pen approved by South extent approved fly ng
dation for a workable world extent the pattern laid down
between the Canal Zone and service for pen approved by South extent approved for pen approved fly ng
dation for a workable world extent the pattern laid down

Panagra called upon the president for special considered and others who neet the regular consideration of the selection of th

* CROSS COUNTRY *

expected to be completed early in 1945 Construct on world be-gin with assurance of priorities

for trans-Atlantic flights being cancelled, effective

Ful. Iffe insurance coverage without extra cost is now being made available to air passengers anywhere in world by Conn General Life Insurance Co. Pilots and crew members likewise will get company cover-

Nevada Pacific Airlines, Inc., has received Nevada Public Service Commission a permission to operate three air routes

UAL announces signing of con-tract with Texas Co. for ap-proximately 500,000 gal of oil

PCA announces new ticket PCA announces new ticket reservations control system in Detroit downtown terminal Method operates on "assembly line" basis, with staff of seven operating around a circular counter and key chief reservationist in center. It can handle 500 phone calls an hour and care for 2,000 people daily states company

N. Y. luxury goods merchants took all space available on first AA air freighter to leave La Guardia Field The company's freight rates are 30c a ton-wile Among merchandise was shoes



OPEN SESAME

by strong claims from steam. Capaciousness of Fairchild C-82 Packet's interior-promising good postship companies, have also war cargo potential—is clearly shown by size of formidable weapon rolling been completed. But opinions down ramp, between twn booms and under stabilizer. Broad tail doors and orders are not expected open aterally to give access to full width and height of compartment. for some weeks or even Note smaller doors, within big ones, by which paratroopers or supplies can be uniqued in flight without danger of striking empennage.

Which Tubing for that Corrosion Problem



More Complete Data is contained to this file fooder - factors that will help you in your selection of Welded Stainless Tubing to meet the requirements of your particular job. A note on your company letterhead will bring it to you.

THE CARPENTER STEEL CO. Welded Alloy Tube Division . Keni worth, N. J.

rosion and high temperatures.

Panagra is distributing through accredited travel agents, a new trade survey of South America almed at organizations represented 23.8 percent increase in air feight and express poindage carried over previous month fighted PCA express jumped 7 percent, Braniff s, 24 percent.

Re postwar ocean fares: AA

ins N Y London charge of \$1.00 one way, giving 10 percent discount on round trips. Sleeper fights would be \$25 extra

PCA meanwhile quotes planned floor price of \$176 for run from New York City to London Rewise with 10 percent dis Rewise with 10 percent dis-count for round trips And deeper rate would entail "ap" or about to per mile , Further Panam's program calls for four postwar flights daily to Bermuda at \$75 for round trie pestwar flights daily t at \$75 for round trip.

Westchester County, N. Y, has received four bids ranging up to \$00,000 yearly for use of its federal built arport at Purchase

or a stub clear ng house record, and passenger's receipt, all stapled together in form of book Using carbons, agent need only fil out one stup which would take about one fifth time now

M ch gan Board of Aeronautics fas appropriated \$80 000 to make a survey as basis of avia tion planning in southeastern part of state. Detroit Metropolitan Aviation Planning Authority formed of State Board and city and county officials of Detroit Wayne Oakland, and Macomb counties, has been formed to make the special analysis planned.

Sept. fight operations: PCA had recease of 122 percent in passengers carried over same percent over some!

Aircraft manned by American plate by Brazil an airports used extensively by American planes will now be controlled by CAA tower personnel.

(Continued from page 223)

Herbert J. Lyall, eastern traffic mgr of AA, is now president of Alrithes Terminal, Inc., N. Y. C., while D. A. O'Connor, north-ern div. mgr., EAL, is new vice-

Quentin R. Cudney is named new asst. chief of dight of Con UAL proposes to industry plan for simplified inter-line tieset tomprising flight coupons, anditions stub clear.


Bert Zimmerly, head of Idaho's Zimmerly Air Transport service, has been named president of newly incorporated Eirpire Air-

John W. Vale, Jr., formerly with Lockheed as airline maintenance Delta Air Lines is issuing to patrons booklet, 'Welcome to Scathern Skies," describing company's history, territory covered, war work, and postwar lines.



RIGHT AT CITY'S FRONT DOOR

Proposed flying boat terminal, one of several plans prepared by Glenn L. Martin engineers by which large flying boats could be berthed adjacent to commercial centers of large cities instead of staying in outer harbors. As shown, plan calls for use of unique horseshoe-shaped tugs, hulfa of which fit snugly around flying boat hall to facilitate handling to and from piers. After berthing flying boat, tag can proceed under per for further assignments.

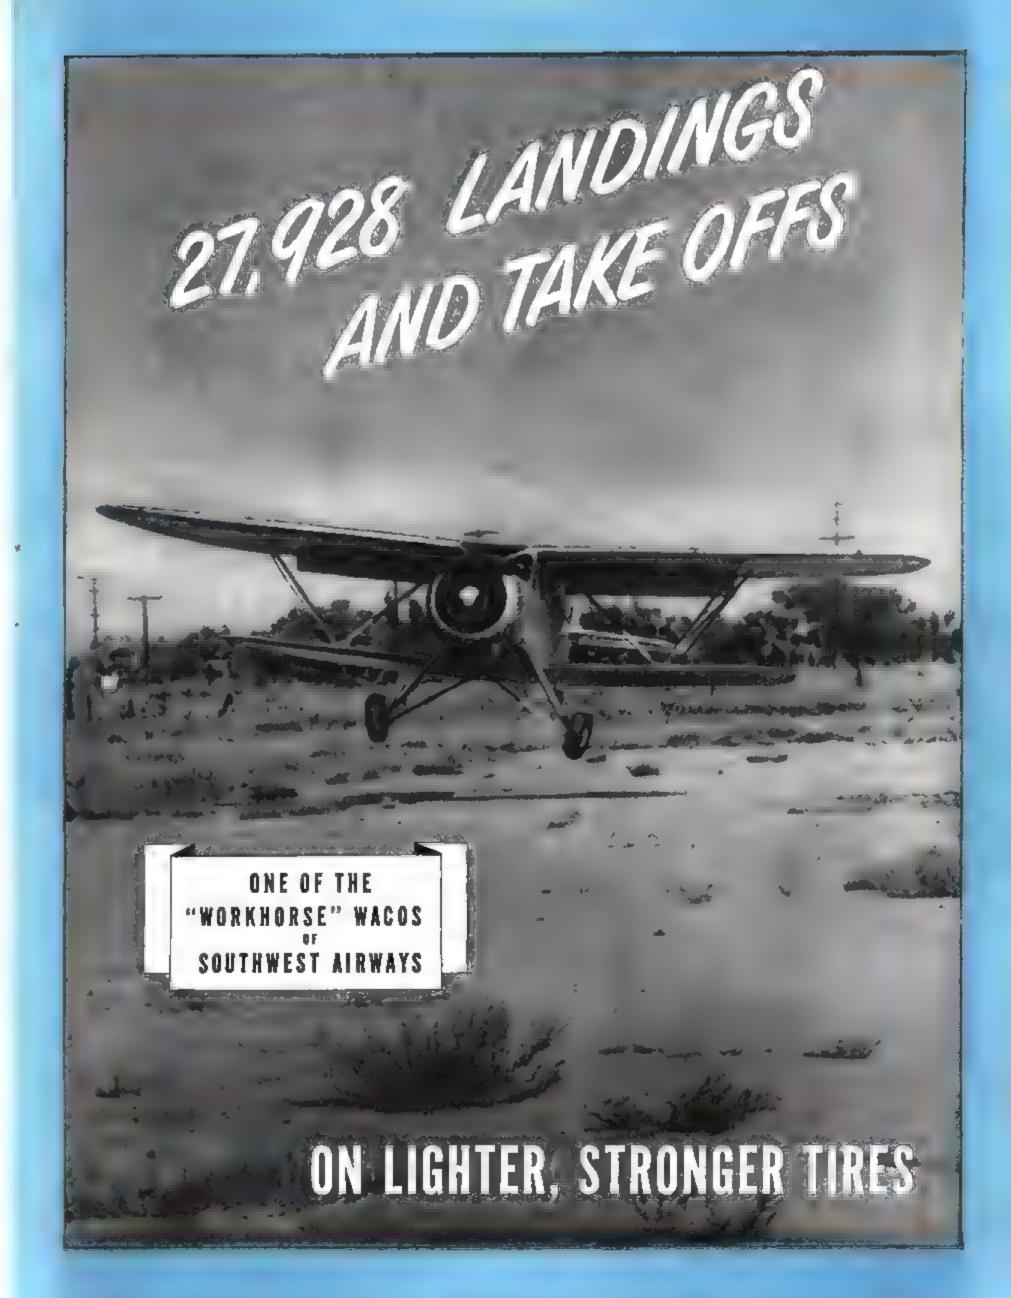





SOUTHWEST AIRWAYS COMPLETES 1,124,574 MILES OF "FEEDER FLYING"

.... without loss or damage to a single ounce of cargo!

In completing over a million miles of feeder lines operations, Southwest Airways' Cargo Division has flown more than 2,900 schedules and handled more than 87,500 pieces of freight totalling more than 2,000,000 pounds.

With stops varying from 16 to 149 miles for an average of 71 miles between landings, Southwest planes have made 27,928 landings and take-offs without loss or damage to a single ounce of cargo.

This great record of accomplishment in feeder line operation was made in pre-war Cabin Model Wacos never intended for this type of grueling service. Under Southwest's direct supervision these "Workhorse" Wacos were rebuilt to handle 72 cubic feet of cargo with a pay load ceiling of 900 pounds.

Vigilant maintenance and skill of operation on nearly every kind of landing strip have made Southwest Airways' accomplishment a trail blazer in the field of "short hop" commercial flying . . . another significant step toward the development of speedier, safer, surer air transport after victory.



"fast taxiing...hard brenking" Capt. Ted R. Mitchell, Operations Manager, Southwest Airways, writes . . . "Operating procedures set up called for fast taxing, which, in turn, necessitated frequent, hard braking. The intense heat thus built up placed entirely too severe a strain on the original equipment. Tires and tubes gave out in as little as 30 hours flight time. The effective role played by your products enabled us to solve this serious problem."

1230 SIXTH AVENUE UNITED STATES



HOW SOUTHWEST CONVERTED ITS PLANES -TO GARRY HEAVIER LOADS

The sturdy Wacos required changes in interior design and construction before they could be transformed from private planes to commercial cargo carriers. Original modification was designed by Southwest Airways' associate company, Southwest Aircraft Corporation. Modification was completed at Southwest Airways own maintenance shops. Here are some of the major changes.




cargo Bars: Steel cargo bars were installed behind the pilot's seat to guard against shifting cargo.



cargo poor: Cargo and pilot doors were cut into the left side of the plane to permit loading of bulky cargo.



cargo compartment: The cargo compartment was increased to maximum size to carry 72 cubir feet of freight,

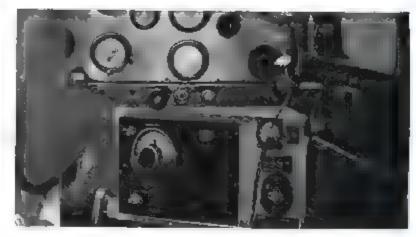

RADIO EQUIPMENT: Co-pilot's seat was removed and a two-way radio unit installed for constant contact.



wheels: Heavy freight loads were too great for the original wheels. Heavier, more rugged wheels were installed.



Tikes: The same size U.S. Royals that equipped the prewar Wacos made every one of the 27,928 landings!

RUBBER COMPANY

ROCKEFELLER CENTER - NEW YORK 20, N. Y.

FROM 30 HOURS TO 3300 HOURS WITH U. S. ROYAL FABRIC BASE TUBES



Since the first day of Southwest's feeder line operations, U. S. Royal Airplane tires have equipped their "Workhorse" Wacos . . . and inside every tire is the U. S. Royal Fabric Base tube . . . the tube that increased tire performance, on these planes, 1100%.

Hard braking, fast taxing, sharp turning built up terrific heat in brakes and wheels. Southwest Airways maintenance engineers called in U.S. tire experts to help find the answer. Taking a leaf from their experience on bus lines where high brake-drum heats are often encountered, they suggested U.S. Royal Fabric Base tubes.

Equipped with these special tubes, introduced to the airplane industry by "U.S.", tire life increased almost overnight. Today, instead of failing after 30 hours of service, Southwest's U.S. Royal Airplane tubes are giving 3300 hours and more . . . are contributing to the outstanding record built up by Southwest in more than a million miles of feeder flying.

This is another example of the practical engineering service "U.S." offers to the aircraft industry through its Field Engineers . . . serving through science to speed the victory.



Lighter, stronger U.S. Royal Airplane tires with bodies of rayon or nylon are serving today on fighters, bombers and transports in every corner of the world, carrying heavier loads safely, surely, dependably.

SERVING THROUGH SCIENCE



TO SPEED THE VICTORY

UNITED STATES RUBBER COMPANY

Aviation Abroad

DC-3's, 4's, 6's Ordered By Australian National

First foreign company to officially order American aircraft for postwar air services is Australia National Airways. Contracts have been signed Napier Sabre deliver 1 hp. per with Douglas for 8 DC-3's, 4 cu. in. of cylinder displace-DC-4's, and 4 DC-6's, deliv-ment. Figures given on the cumstances permit.

be used on ANA's extensive domestic network, while perhaps the larger models will also see service on new international routes contemplated

of DC-3's from Douglas in

The list of new German air- props. craft types is steadily lengthening. Among the latest said started a regular England-tothe FW-154 and FW-191, twin-

the new He-234, four-engine bomber-transport; the He-277, Japs have new four-engine bomber-transport—a midwing He-177 bomber; and the He-178 bomber transport—a midwing Hi-15-ft—span craft with double till and having tracycle landing gear. Yanks call it "Liz".

Junkers Juno 004 units. In addition, Messerschmitt has brought out the Me-243 and Me-250, long-range four-enaircraft . . . Merlin, Sobre has the Hs-294, a development of the Hs-293 radiocontrolled glider-bomb.

Merlin, Sabre "1 Hp. Per"

Reports have it that both the Rolls Royce Merlin and eries to begin as soon as cir- former are 1,650 hp. with 1,650 cu. in.; on the latter, Some of these aircraft will 2,220 hp. with 2,240 cu. in

*INTERNATIONAL BRIEFS:

by the company
It will be remembered that this line purchased a number of DC-3's from Douglas in

1937, and additional Douglases were sent to Australia
later under lend-lease.

More New Nazi Craft

The list of new German air-

engined fighters, and the FW-300, a six-engine long-range transport.

Further, Heinkel is making the new He-234, four-engine transport.

Further, Heinkel is making the specific type of installation on the new He-234, four-engine transport.





RISING RED STARS

Rarely available are photographs of first-line Soviet fighter planes, some of which reveal thoroughly modern design. LA-5 (top) is one of few Red Air Force fighters using radia aircooled engine. Available data Indicates plane has span of 31 ft. 91/2 in ; length of 28 ft. 7 in., and high speed of about 375 mph. YAX-3 (above) is one of long line designed by A. S. Yakoviev, all of which have same basic characteristics, (Soviotos)

WORLDATA

Reports from England announce construction of three Avro Tudors as part of a larger order of 100 Designated as prototypes, these first three aircraft will consist of a transocean version, a continental model, and a short-haul version, A. V. Roe at same time received the "go-ahead" on a larger airliner (for 125 passengers), designed to have a top speed of 325 mph, and a cruising speed of 250 mph. As yet unnamed, this plane would have a 150-ft span and gross around 60 tons.

Belgian Sabena airline which had been operating various routes in Africa, has finally been able to add the planned link with England. American-built Lockheed Lodestars will be operated on the new Lisbon-touching route. It is expected Sabena will be the first company to reconnect the Belgian homeland with the colonies, with transfer of its base from Southern England to Brussels.

In our September issue, Sweden's conversion to airliners of some downed Boeing B-17's was reported and details of this remodeling have now appeared in the Aeroplane. Revamping has brought lengthening of the nose, and there was soundproofing of the fuselage when rear part of the plane was converted into a 14-passenger cabin. Bomb bays meanwhile were made into cargo compartments, to carry loads on trays suspended from the bomb-

Two of these aircraft were delivered in October, enabling ABA to open a domestic service connecting Malmoe, Gothenborg, Stockholm, and Lulea. Another three planes were to be delivered as we go to press. These may be used on the Sweden-England and Sweden-Moscow routes. The Fortresses were availed to Sweden under a loan arrangement with the U.S.

Sixty percent of present British BOAC fleet comprises American aircraft. In service are 29 flying boats—13 Short "C" class, 1 Short "G" class, 11 converted Short Sunderlands, 1 Consolidated Model 28, and 3 Boeing 314's The latter were sold to BOAC by Pan American Also in company service are 78 landplanes-9 Short Ensigns, 9 Consolidated Liberator Expresses, 5 DeHavilland Flamingoes, 5 civilian Mosquitoes, 20 Douglas C-47's, 2 Lockheed Electra's, 3 Lockheed 14's, and 25 Lockheed

interesting new de-icing system has been developed in England by TKS, Ltd., which is a combination of three firms, Tecalemit, Killfrost, and Sheepbridge Stokes. Device utilizing special porous metal, developed by latter company, keeps layer of fluid spread over plane's entire wing and tail surface. The fluid is a development of Killfrost, while special metering and valve equipment was built by Tecalemit. Apparatus with fluid for 51/2 hr. of intermittent use is reported to weigh but 400 lb. for a 300-ton four-engined plane.

ATC inaugurated regular service Cuba run.

Sweden reports ATC will shortly start service to Stockholm and probably Moscow under direction of Bernt Balchen. Route would be via Iceland.

First non-stop flights between north to San Francisco and east America and Paris since 1927 to Havana with amphiblans, were completed recently when thus to provide U. S.-Mexico-

Britain's intra - fusciage - jet craft, recently pictured, is a product of the Gloster company (it has initially been miscalled the "Gloucester") A new report says this plane was first flown on May 15, 1941 by Gloster's Chief Test Pilot P E. G.

Hussia now has a series of commercial airbases in Siberia, facing Japan and Alaska and these could be converted to military bases in short order

Servicio Aereo Maritimo, S. A, a new Mexican airline, has applied for permission to operate ters Chief Test Pilot P E. G. Sayer


Latecoere's big 6 engine flying boat is still undergoing tests, since it suffered alleron flutter which, say reports, hasn't been alminated. The 70-ton SE 200 flying boat is also still undergoing tests in freed France.

VINCO GEAR ROLLING FIXTURES with MASTER GEARS


a positive check for backlash and run-out.







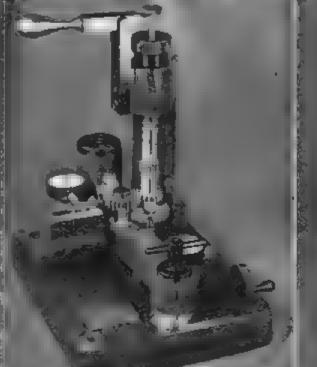





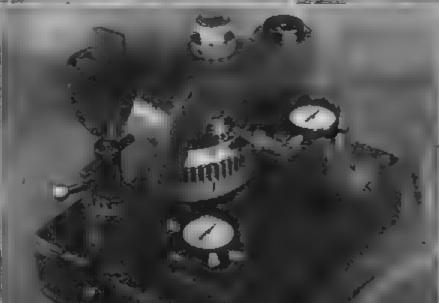

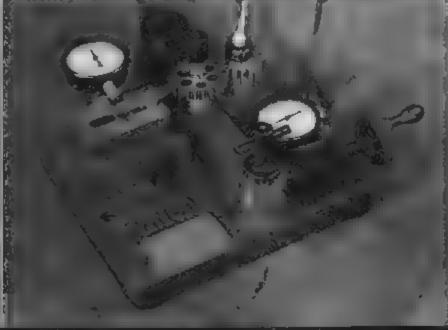

VINCO CORPORATION, 8848 SCHAEFER HIGHWAY, DETROIT 27, MICHIGAN, SALES OFFICES, NEW YORK, CHICAGO, CLEVELAND

MILLIONTHS OF AN INCH FOR SALE BY

Sami-Automatic Hydraulic Spline and Goar Grinder • Optical Master Inspection Dividing Head • Involute Checker • Angle Tangent to Radius Dresser. 🖑 Index Plates: * Precision: Vises: 4: Sino Bars: > Straight-aide Spline, Serration Spline, Invalute Spline and Helical Spline Plug and Ring Gages * Thread "Pluys, Rings and Setting Plug Gagos + Spur and Holical Master Goors + Munition Gages + Propolice Hub Gages + Built-op and Special Gages + Goor-Rolling Fixtures - Spline and Index Pixtures - Hydraelic Power, Control, Utilization and Distribution Units - Engineering, Design and Development.

Aviation Finance

Northrop Aircraft is simplify- 1943 quarter Operating reveing its capital structure by nues were \$7.783,000 against eliminating the Class A and B \$5,208.674. Net profits for the shares and issuing one class of nine months were \$2.04 a share new common stock on a share- compared with \$1.99 a share a for-share basis. The new year ago stock will be listed on the N Y Curb and Los Angeles Stock Unfilled orders Lockheed Air Exchange. Earnings for the craft has unfilled orders in year ended July 31 were \$603,- excess of \$1,000,000,000, accord-515 or \$1.50 on the combined ing to Pres. Robert Gross A and B stocks, against net A recent \$40,000,000 contract earnings of \$1 249 535 or \$3.13 places Ryan Aeronauticals share in the previous year back.og at \$70,000,000 accorda share in the previous year

from 1,000,000 shares of \$10 mates by company officials par value to 2,400 000 shares of \$5 par value Present shares Trans-Oceanic Airlines of Wilcommon shares for the 574,848 within the meaning of the Inshares outstanding. The com- vestment Company Act of 1940. shares of preferred stock for nouncement redemption on Jan 15 and plans to issue 200 000 new pre- National Aviation Corp. remay convert into common \$1716 on June 30 and \$17 a stock at \$70 a share. The re- year ago. Net profit of \$148 858 capitalization plan is to pro- from sale of securities was carvide additional working capi. ried directly to surplus. tal for expansion needs

controlling interest in TWA by rate to replace the \$17 000,000 the Hughes Tool Co., owned loan which had expired in by Howard Hughes. Now hold- September ing TWA stock valued at more than \$5,500,000, Hughes began buying the stock in 1939.

At the same time CAB disapproved acquisition of a controlling interest in American

Typoot Abelian American

Typoot Abelian Special Reports that for months ended Sept. 30

het profit was \$1,239,431 or \$2.80 a share against net profit of \$1.309.006 or \$2.96 a share; in the like 1943 period. Export Airlines by American in the like 1943 period Airlines

serves against a similar re- training schools will provide serve of \$638.843 the preceding \$250 000. directors will sub-

to increase its resources for common stock postwar operations by selling 75,000 shares of \$10 preferred Mid Continent Airlines re 000 and the money will be like 1943 period. working capital.

ing to Pres T Claude Ryan American Airlines stockhold- Postwar operations of Timm ers meet Dec 6 to vote on a Aircraft are expected to equal proposal that the authorized present annual volume of \$15 common stock be increased 000,000, according to esti-

will be split on a two-for-one mington. Del has ceased to basis by issuing 1.149.696 new be an investment company pany has called its 50 000 according to an SEC an-

ferred shares of \$100 par value ports that net assets per share Holders of the old preferred on Sept. 30 were \$1829 against,

Northrop Aircraft has ar-Stock Control: The CAB has ranged a new V-loan of \$18,approved the purchase of a 000,000 at a reduced interest

Parks Air Transport has been Gramman Aircraft Engineer, incorporated with \$3,500 000 ing Corp. reports net profit for authorized capital stock, and the six months ended June 301st will have \$2,000.000 paid-in of \$6,174.816 or \$10.18 a share, capital to develop an airline against \$1.697.108 or \$3.34 a project being organized by share in the like 1943 period Oliver L. Parks, East St. Louis, The 1944 earnings are subject Ill. An application is pending to final renegotiation An esti- before CAB for authority to mated \$2.015.968 postwar tax, operate 35 air routes in 15 refund was transferred to re- midwestern states. Five Parks scribe to \$400,000 of common stock and another \$1,350,000 Aeronea Aircraft Corp. plans will be raised from sale of

stock and 25,000 shares of ports net profits for the nine 40c a share last year

Aviation declared a \$1 a share common on Dec 22. dividend payable Dec. 16. A:

ADDING IT UP.....By RAY HOADLEY

Dividends. This is the month the majority of aircraft companies hand out dividends to their stockholders, shortly before Christmas. A few years ago practically all plane makers deferred dividend action until near the end of the year. The trend now is towards semi-annual disbursements and, in a growing number of cases, towards quarterly payments, as is the custom in most other

Larger Payments. Dividend payments in the aircraft field will aggregate much larger for 1944 than for any other previous year. In the first nine months of 1944 the average of all dividend payments by concerns listed on the New York Stock Exchange was up 7.2 percent. Aircraft dividend payments were up 15.6 percent in that period, compared with increases of 35 percent for the amusement stocks 33.6 for the automotive firms, 29 for rubber companies and 14,5 for the oil companies. Only 8 out of 28 groups failed to show dividend gains, among them the textiles, building construction commercial credit, and

Taxes. Some large corporation executives are making their postwar plans on the basis of a 40-percent corporate income tax. They hope it will be lower after the war, but they doubt that it can be due to the war debt. Nor are they looking for an immediate elimination of the excess profits tax, believing instead that it will be continued at a much lower rate than at present. This would mean that postwar taxes would be several times as high as any previous peacetime levies

1944 Profits. Some indications point to aircraft earnings this year being slightly ahead of those of 1943. However, as few of the aircraft companies have made interim reports there really isn't much to go on except the fact that volume has been higher for nearly all companies. The Grumman report was highly satisfactory, and Douglas Aircraft, among others, is expected to better its 1943

Balance Sheets, Highlight of most aircraft reports on 1944 operations undoubtedly will be a vastly improved financial position compared with that of 1942. In that first war year, working capital was almost pitifully inadequate in relation to sales and also in relation to almost any other industry. But at the end of 1943 working capital had jumped to around half a billion dollars and depreciation reserves were more than half the gross property account. The 1944 balance sheets should show most companies in relatively good shape to face reconversion, provided contract termination works out as well as the government insists it will.

Airline Program. Last July Congress called on CAB to make a special study of multiple taxation of the domestic airlines and report back with recommendations. It is expected the report will be ready before the end of this month and that it will lay the basis for a cooperative federal-state taxation policy so urgently needed for postwar expansion of the airlines

common stock. It is estimated months ended Sept. 30 of Cell-O Corp. will pay a year- Co. The company, which was used to acquire additional plant facilities and increase Dividends: North American Motors will pay 15c. on its

Ex-, stock in the Swedish Airplane that the proceeds of the sale \$174.842 or 44c a share against end dividend of 65c. on Dec formed in 1937, makes airwill amount to around \$725,- \$148.504 or 38c. a share in the 22, bringing total 1944 pay-planes and accessories. It opments to \$2.60, the same as erates almost exclusively for

Airplane & Marine Instruments, Inc. reports net earn-Transcontinental & Western similar payment was made a Airplane shares recently were ings for the six months ended Air reports for the September year ago . . . Ryan paid a offered to the Swedish public June 30 of \$293 185 or \$1 29 quarter net profit of \$1.420.553 35c, dividend on Nov. 20 . . for the first time when a bank a share. The company earned or \$1.46 a share against \$872,- Northrop Aircraft has paid a syndicate put on the market \$149.805 or 68c. a share in the 927 or 90c. a share in the like total of 50c. a share against more than \$3.500.000 worth of twelve months of 1943

Aviation People











ROBERT M. STANLEY (left) becomes chief engineer of Bell Aircraft's Niagara Frontier division. He had been chief test polot and manager of Bell's flight research dept, and was the first man to fly the jet propelled Airacomet. Before joining the company in 1940 he had been with Douglas and Vought-Sikorsky. Two other promotions in same div, are a new asst. thief engineer, JOHN F. STRICKLER

(center) who has been with the Beil company since 1936 and who was project engineer on the Airacuda and also asst chief project engineer on the P-63 Kingcobra, and JACK WOOLAMS (right) who is now chief test pilot. The latter, who formerly was senior experimental prot and assi chief test pilot, conducted the high altitude tests on the company's

MAJ. CHARLES E. HAR-NER has joined Hil & Knowlton after two years in the AAF now being or inactive status, Prior to going into the Army, he engaged in financial and aviation writing was an AP foreign correspondent, and also was with N W Ayer

RICHARD J. STEVENS has been made superintendent of overhaul at TWA's home maintenance base. He had been regional maintenance supervisor at airline's La Guardia Field base since 1942 In new poston he succeeds Verde A. Backwe I, who died last August.











CHARLES W. FRANCE (left) Curtiss-Wright vicepres, and gen, manager of company's airplane division. at Buffalo, returns to St. Louis plant as general manager. At the same time N F. VANDERLIPP (right) becomes general manager of Buffalo plant, feaving Columbus, Ohio, factory where he had held position of manager for more than a year. In addition he will coordinate Navy experimental work with the activities of the Columbus plant. Both men will be concerned with stepping up production of C 46 Commandos.

KEN ELLINGTON becomes manager of N Y C office of Aircraft Manufacturer's Council, ACCA where he will coordinate regional activities of Eastern companies. He has been secretary of AWPC East and consultant to Hill & Knowlton, (Blackstone Studios photo)

R O BULLWINKEL (left) for more than a year to pres. of Northwest Airlines, western region, has been placed in charge of all traffic on the NWA system. In his new position he will direct coordination of all traffic and a so sales activities COL W FISKE MARSHALL (right), formerly operations mgr. for NWA, has returned as executive asst. to pres. He was organizer and commander of famed South Pacific SCAT, was awarded Presidentia. Un t Citation for his work at Guada canal, also won Legion of Merit.











PETER ALTMAN Aeronea Aircraft Corp., Middletown, Ohio, as consulting engineer. Previously he had been head of Aeronautics Department, University of Detroit, had also organized and directed Vultee's manufacturing research department, and worked on development of




ARTHUR E. SMITH is ap- ERNESTO FRANCO bepointed asst, chief enomeer of P & W aircraft div. of United Aircraft Corp. For the past two years, he had been chief engineer of com-2800-C engine went into production. He came to P. & W company in 1935.

comes legal adviser for TACA Airways agency. He w Is handle the twelve TACA companies in Central and South America. Previously pany's Missouri plant, where he had been associated with he supervised all engineer- Pan American-Grace Airing activities as new R- ways in the capacity of legal and administrative assistant to Company Vice President

moved to Ryan Aeronautical Co as firm's new vicepres. and gen. mgr. One of country's ablest men on volume production, he comes to his new post from Bell organization, where he had been gen. mgr. of Marietta B-29 plant since 1942. He will hardle production on Ryan's new Navy plane. Stinson models,

OMER L. WOODSON has

AVIATION, December, 1944

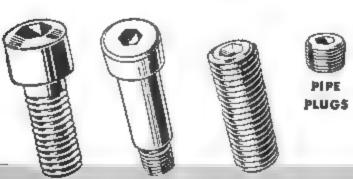

CAP SCREWS STRIPPER BOLTS SET SCREWS

A product of PARKER-KALON ... Specialists in Fastening Devices

WHEN Good Design CALLS FOR SOCKET SCREWS

Good Judgment
CALLS FOR

PARKER-KALON

Controlled Quality

Whenever you specify Socket Screws, it is because you need strength, safety,

Since you use them when you need an exceptional fastening, it is good judgment to make sure you get Socket Screws of exceptional quality. At such critical points in your assemblies, you can't afford to have "doubtful" screws . . . screws that look all right, but some of

Parker-Kalon's Quality-Control rou-tine, unequalled in the industry, rules out "doubtful" screws by checking

every mechanical and physical charac-

teristic. Tests and inspections cover

Chemical Analysis; Tensile and Tor-

sional Strength; Ductility; Shock Re-

sistance under Torsion and Shear; Hard-

ness; Head and Socket Size and Position;

Specify Parker-Kalon Socket Screws next time you order . . . they cost no more. Parker-Kalon Corp., 208 Varick

compactness, or other advantages.

which fail to work right.

St., New York 14, N. Y.

PARKER-KALON
Quality-Controlled


SOCKET SCREWS

Thread Fit.

SOUTH BEND Precision

LATHE

. . . . FOR THE MANUFACTURE OF SMALL ACCURATE PARTS IN PRODUCTION SHOPS . . FOR PRECISION OPERATIONS IN TOOLROOMS, EXPERIMENTAL SHOPS, AND LABORATORIES

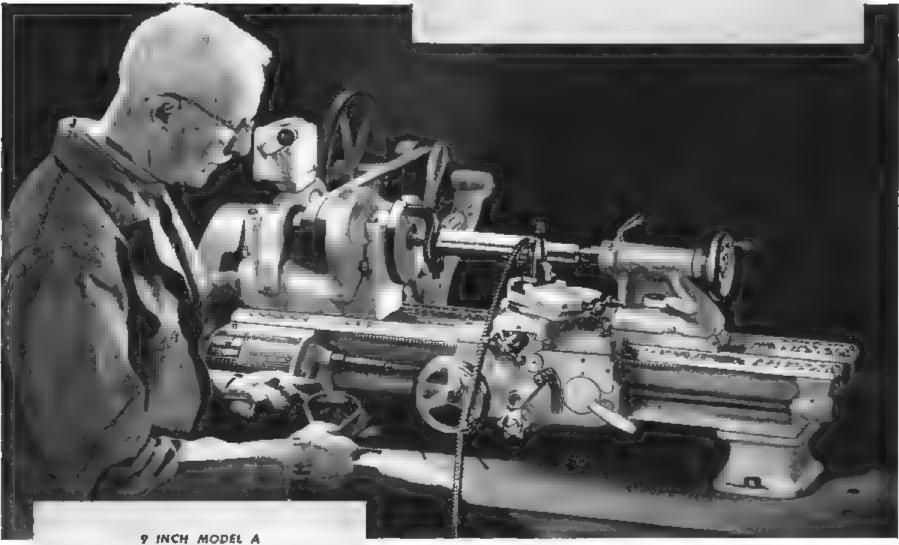

SOUTH BEND LATHE FEATURES

Fine workmanship by experienced machine tool craftsmen.

Superfinished spindle with large bearings. Direct belt drive to spindle for smooth,

Back-geared, drive for heavy cuts and low

Full quick change gear mechanism.

quiet aperation at high speeds

Thread cutting range-4 to 224 per inch. right hand and laft hand, 48 pitches

Precision lead screw for thread cutting.

Worm drive and friction clutch for power longitudinal feeds and power cross feeds.

Three hand-scraped V-ways and one flat way on the bed insure perfect alignment of headstock, saddle, and tallstock.

Whether your problem is the quantity production of small, accurate parts, or the efficient machining of small work in the toolroom, experimental shop, or laboratory, you will find a lot of possibilities in the 9-inch South Bend Lathes. Modern in design, built with the same care as the larger sizes of South Bend Lathes, they are fast, accurate, and versatile. Substantial savings in capital investment, power consumption, floor space, and labor costs have often resulted from their installation.

In addition to the 9-inch Lathes, we manufacture 10", 13", 141/2", and 16" lathes in Quick Change Gear and Toolroom types. Also the Series 900 and Series 1000 Precision Turret Lathes having 1/2" and I" collet capacity respectively. Write for a catalog, stating the size and type of lathe you need.



Sound films, operator's handbooks, wallcharls, bookerts, and outletens on lathe opcration and care are available for training rew latte operators. Write for Bulletin No. 21 D for fall information.

HE OLD MAINTENANCE MAN WAS reminiscing about his early mail plane servicing days when the DH-4's out in the northwest were coming consistently down with dead engines. After the usual diagnosis revealed nothing wrong, and the engine would run up beautifully, the pilot would again take off, sometimes getting through to his destination. Anyway, our friend thought he had the answer when one of them staggered onto the home field-under full throttle -and he was able to discover ice in the carburetor. In high glee they built the parts necessary to take heat off the exhaust manifold to keep the carburetor warm. Then the engine ran excellently on the ground-but conked cold soon after takeoff. "We had," he said, "designed and constructed the first built-in vapor lock."

- This same old timer had wonderful definitions for preventive and corrective maintenance. "When the blankety-blank thing won't fly, your preventive maintenance has been lousy and you gotta resort to corrective maintenance."
- The millenium, it seems, is here. At long lawst a Britisher has admitted that the Empire is not leading the world in every endeavor. In the House of Lords the other day, Lord Beaverbrook said-right out loud, too-that these United States have an edge in air transport development. Which confuses us no end, for their propaganda services have certainly been trying hard, and not too subtly, to give the idea that the Avro Lancaster is the ready answer to the transport operator's dream, and that the stuff coming up any day now will simply make everything conceived outside the tight little isle completely obsolete and shabby by comparison. Can it be true that in Britain, too, the right hand knoweth not what the left is not domg?
- · During that same discussion Lord Brabizon asked the perennial British question: Why do we modest Britishers insist on hiding our light under a bushel? As his example he declared that the Gloster squirt plane could fly rings around the Bell jet plane. P'raps m'lud was thinking of the Bell Helicopter-it does, among other things, a swell job of hovering.
- One instrument man with an eye on maintenance may have his old grammar teacher spinning in her

grave, but he gets his point over. On all gyro compasses turned out by his department he has had painted in big. bright red letters this warning: "Do tures during the blackout. not jar. Handle like eggs."

- It's oft been said that aircraft salesmen as well as designers are slightly nuts, and it's small wonder the adjective "slightly" is used. Other day, for example, a newspaper wanted a price on one of the country's most popular three-place 165-hp jobs. But before closing the deal they just wanted to be sure the thing would carry, in addition to the pilot, two reporters, one photographer, and a dark
- Man looking over our shoulder here said the salesmanager should have business.

- talken them out of the darkroom said just put the thing into a 9-G dive and quick-like-a-rabbit develop the pic-
- Within the week this same sales manager got a call from a magazine. They wanted the same kind of plane, but first demanded exact operating costs for the job with an 1,800-lb. press installed.
- · Gentlemen, there just ain't no romance left in this business of air transportation. Final proof of this sad, sad state of affairs was given recently when American Airlines flew 5,000 lb of spinach east from California. And when you start lugging spinach around you've taken all the glamor out of the



"Maguire's going to corner the whole airplane market with the maintenance man's dream ship,

AVIATION, December, 1944



IN THE FIELD OF RADIO NOISE ELIMINATION TOBE IS THE ACKNOWLEDGED LEADER


O NE engineering result of the war is increased knowledge of radio interference problems. It will never be lightly treated again. No engineer can tackle the development of an electrical design without giving due consideration to minimizing the radio interference it creates in operation. Specially designed filters, to be built into electrical circuits, can usually solve the problem of radio

Here at Tobe is a great storehouse of

knowledge in this subject. It is sound knowledge, gained by the most intense interest and experience of any company in the field.

Tobe Filterizing is a copyright term. It means that Tobe knows how to "filterize" man-made radio noise. Why not make use of this valuable 16 years' of experience in your own engineering? Place your reliance on Tobe and the famous Tobe Filterettes. Send us your problems now,

LONG LIFE ASSURED!

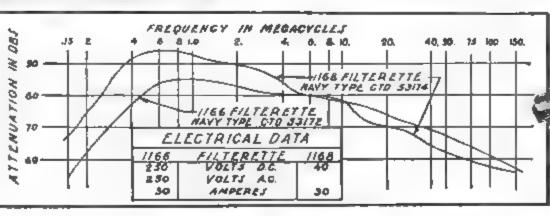

-CONTAINER DIMENSIONS-

Length . . 4%6'' Width . . 2%'' Height . . 2%'' Overall length 6%''

Tobe Deutschmann Corporation

CANTON, MASSACHUSETTS



A small part in Victory Today - A BIG PART IN INDUSTRY TOMORROW

KEEP POSTED ON

Products and Practices

ENGINEERING DATA

Engineers Specialties Div. Universal Engraying & Colorplate Co., Buffalo and Cleveland, offers new circular, Screw Thread Comparator Charts, covering American National fine threads and American National coarse threads, both for class 2 and 3 ft. El mination of dup wate charts makes possible checking of from 1 to 7 sizes on individual charts.

—AVIATION Bet 44

Company's History and Plans......2

Rocklet from Thompson Products Inc., Creand contains story of company's busics during past 10 or describes products and processes, and outlines plans for flure AVIATION Dec. 44.

Median cal reproduction of full sized data drawings directly on tooling materials a described in new booklet Precisio— Lofting issued by Template Repundant on Co. Physical physical Emphasized is a seed and accuracy of method.—AVIATION Dec. '44

Forgings Bulletin......4

To be published periodically by The R ss Forging Assn. New York is new him oin Non Ferrons Forgings Digest AVACON, Dec. 44

Resistance Welding..........5

befor ation is available from Resist ance We der Manufacturers Assn. Philadell in regarding spot weiding in manufacture of scapiare mooring bit assembly, with methods employed at Glonn L. Martin Co. Balt more plant, being described.—AVIATION, Dec. '44,

Mar, all of operation maintenance, and service of companys de-icer smeld for an unit wirdshields has been prepared by Raymond Delicer Co. Los Angeles. Dos ill ed are characteristics and installations.—AVIATION, Dec. '44

Beginnic with information on the derivation of nitrocellulose, 58-page text-book-type brochure on properties and uses of this product contains chapters or manufacture, types solubility, and viscosity. Also included are tables and specifications. This publication has been issued by Hercules Powder Co., Wilmington, Del—AVIATION Dec. '44.

PRODUCTION

Metal Inspection X-Ray.... 8

Information is available on new 2,000,-000% x-ray tube developed for inspection of thick sections of metal. Issued by Machlett Laboratories, Springdale. Conn., it states that exposure time of 1 wk with 1,000,000% is now reduced to 1 hr with 2,000,000%—AVIATION Dec. '44

Catalog, color card, and bulletins on high heat resisting paint are being dis-tributed y Quigley Co., New York City -AVIATION, Dec. '44

Job shop service on electronic induc-tion held treating of metals is topic of circular from Central Boiler & Mig Co Detroit Folder cites advantages of process.—AVIATION Dec '44

This selected information on new publications and products is offered by the "AVIATION" Reader's Service through cooperation with the manufacturers. It helps executives save valuable time, provides profit through convenience. To obtain literature or additional data on new products described, simply fill in form below, clip it to your letterhead, and mail. There is no cost, no obligation.

Plating Rack Projection......11

B. F. Goodrich Co. Akron. has sayed new cata og section on Korosea, tape RX and Koros RX (Koroseal solution) protective coatings for plating racks. Characteristics, properties and instructions for use are given.—AVIATION, Dec. '44

Metal Degreasing.....12

Outlining fundamentals of degreasing-machine design, installation and operation, booklet from E. I duPont de Nembers & Ca., Wilmington, Del lists standard practices for degreasing met, swith chlorinated solvents—AVIATION Dec. '44

Circular from Shakeproof, Inc., Chicago describes thread outling screws and the rapplications. Included here are pertinent or uncering drawings.—AVIATION, Dec. 14.

Tool-Steel Electrodes.....14

Data on metal ic arc tool stee welding is contained in manual and catalog from Welding Equipment & Supply Co. Detroit Applications and procedures are given.—AVIATION, Dec. '14.

Hydraulic Cylinders15

But etin 401-C from John S Barnes Corp Rockford II., gives specifications of hydraulic cylinders and suggests ap-plications stated to improve machinery designs.—AVIATION, Dec. '44

Miniature Ball Bearings......16

Miniature Precision Bearings Keene, H., offers Bulletin No. 44, describing

ine of manuature carings for instru-ment, industrial, and special uses.— AVIATION Dec. '44

Topic of tool salvage by brazing is covered in bulletin from Handy & Harman, New York City —AVIATION, Dec. '44.

MACHINERY & ACCESSORIES

New metal catting saw having full me-New ineral carting saw having full the control drive is described in Balletin M 51 from Peer ess Machine Co., Racere, Wis. Among new features is componsating feed unit AVIATION, Dec.

Fisher harmone Co. Chi ago, has issued new catalog describing the of melting furnaces recommended applications, and giving the capacities and dimensiona.—AVIATION, Dec. 44

Angle-Forming Instrument......20


Radiform" new rid us and angle forming instrument reported to perform wide range of operations in improved manner is described in circular from W F Meyers Co., Bedford, Ind —AVIATION, Dec. '44

Radius Dresser Insert.........21

Two new models of radius dressers are described in circular from I'S Tool & Mfg Co. Dearborn, Mich. Model 45 is described as adaptable to all radii including 4½ in and is stated to be suitable for

AVIATION READER'S SERVICE AVIATION, 330 W. 42nd St., New York City 18 Please send me additional information according to key numbers circled. INFORMATION TIPS: 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 NEW PRODUCTS: 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 NAME FIRM OR AFFILIATION

DECEMBER

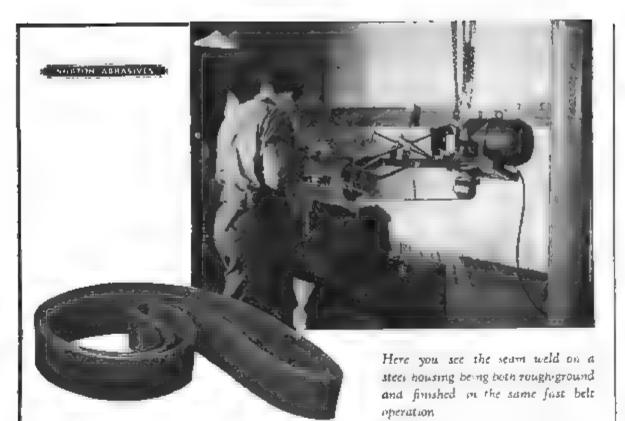

METALITE CLOTH BELTS Improve Swing Frame Grinding

NATURALLY! Their greater area and sharper surface obviously provide cooler, faster cutting and better finish.

Note the shower of sparks' Tet the

bett disperses heat quickly

A maker of stainless steel tanks for milk trucks, where finish was paramount, was influenced by one of our men to adopt this modern method for polishing the entire inside of the huge saucer-shaped ends

Result One man, one shift, now keeps ahead of a schedule that formerly required two men, two shifts.

If you run a Swing Frame Belt Grinder, send for our brochure "Metalite Cloth Belts Improve Swing Frame Grinding" If not, we can send you manufacturer's literature on the Grinder itself. Here's a handy coupon.

BEHR-MANNING TROY, N. Y.

DIVISION OF NORTON COMPANY

BEHR-MANNING - TROY, N. 3 Please send the following literatu Metalite Cloth Belts, etc.	re:	me Abrasive Belt	Grinder.
Firm Name			
Street			
City	Zone	State	
Ву	Title		

concave or convex dressing while Model 124 is angle correcting dresser, max radius 138 in designed for correcting radius on wheel for grinding compound and compound-complex forms on flat form 1901s. AVIATION Dec. '44

Micro-Form Grinder......22

Booklet from The Sheffield Corp. Day ton. Ohio describes new micro-form prinder for production of profiles direct from drawing. Principles are detailed and applications illustrated—AVIATION Det. 14

How to convert single spindle drill press from to convert single spindle drill press for in it perspindle production work is discribed in circular announcing the new Madrid of il press turnet attachment. Made by Machine Development Co., New York City new device is stated to make possible six consecutive drilling operations (spot facing in ling counter-boring reaming, etc.) without changing tools.—AVIA-T.ON. Dec. 444 etc.) without T.ON, Dec. '44

Dust-Collector Catalog......24

Feature of new catalog on dust collectors, issued by Aget Detroit Co Ann Arbor Mich is special indexing References are given a cording to grinder sizes a nate id of collectors) and by specification of source of dust in list, referral to proper ellectors is made. AVIATION, Dec. '44

Variable Speed Drive......25

New variable speed drive by Lombard trovernor Corp., Ashland, Mass., is desert bed in circular as special development for modernization of old machinery and marinfacture of new in that it provides new possibilities of use of geared drive power transmission in medium and higher horsepowers—AVIATION, Dec. '44

Circular from Hyster Co, Portland truck stated to have new high rating for with capacity AVIATION, Dec. '44

Topping Machine.....27

Described as being capable of simultaneously tapping three different sized holes up to 1 in., 'Tapmaster' 3-spindle automatic tapping machine made by D. H. Prutton Machine & Tool Co. Cleveland is atroduced in new circular—AVIATION Dec. '44.

Manual containing notes on proper selection of taps and providing tables covering tap fits, basic thread dimensions, and tap drill sizes, has been issued by Charles H Besley & Co. Chicago Included are recommended speeds, lubricants, and angle of cutting face for various metals.—AVIATION, Dec. '44

Torque Tool Manual...........29

Giving tables, formulas, and a graph as aids to determine relative shearing torques for machine scrows and studs new booklet issued by Apco Mossberg Co Attleboro. Mass. also includes element ary definitions which relate to torques—AVIATION, Dec. '44

Compressed-Air Cooling......30

Bulletin 98 from Niagara Blower Co., New York City details new method of compressed air after-cooling and gives specifications of company's "Aero" after-ocoler AVIATION, Dec. '44.

Catalog covering dial indicators micrometers, comparators, cylinder gages, and thickness measures is announced by B C Ames Co., Waltham, Mass.—AVIATION, Dec. '44.

Garlinghouse Bros., of Los Angeles, offices circular on portable splicing rig for wire cables.—AVIATION, Dec. 144

Hale Punching......33 Equipment, methods and applications of 'CD' hole-punching system are described in new Catalog CD saued by Wates Strippit Corp., North Tonawanda, N. Y. AVIATION, Dec. '44.

Lesser-Phoenix, Cleveland, offers booket Supply the Things of Tomorrow in

which is described equipment and mathods

Designed for aircraft anti- eng and bester applications. See ... & hid in tering pump, made by A a three-son i reducts. Corp. Burba k... a d. s. d. seried in new circular issued by company.—AVIATION Det. 4

Electric Unit Heaters37

Builetin 44 U from Electric Air Heater Co Mishawaka Ind describes line of ceiling, wall, and post suspension meetric user heaters.—AVIATION Tool 44

Ir dustria, trucks and tr. coos mar, fortured by Mercary Mfg et Chic go, an described in catalog just assued—AVIATION, Dec '44

Chucking Reamers............39

fumersions and other information of spira fluted chucking reamers is contained in circular from Chicago-Latrobe Twist Drill Wks. Chicago AVIATION Dec. '44

triplar from Bowser in Fort Wat e Ind contains descriptions and specifications of agad storage handing, dispensing equipment AVIATION, the 44

New 16 os. capacity plusters apecion to drg machine is announced by Hydrau c Press Mig Co Mt Glead Ohio. I formation and drig digraps be available. AVIATION Dec. 44

Metallizing Equipment.42

Descriptive catalog of victal izing accessories is offered by Meta izing Co. of At erica. AVIATION Dec. 44

PLASTICS

I delite Corp., Detroit, effers carellar on Keroseal tank linings, stated to be highly resistant to acids and corresives. List if metal finishing chemicals is included and tesistance of linings is indicated -- AVIATION, Dec. '44

Moiding Material.

hemaco Corp. Berkeley Hts., N J., on o cas "Polystyrene" new thermo-plastic molding powder. Booklet describes physical properties of powder and lists applications.—AVIATION Dec. '44

Plastic Materials......45

Applications of "Plaskon" materials to needs of molding industry are given in booklet from Plaskon Div Libbey-Owens-Ford Gass Co. Toledo, Ohio Each type is described, and special section of booklet is devoted to 'Pinskon' resin glue - AVINTION, Dec '44

ELECTRICAL

Aircraft Test Equipment.......46


Arphane Mfg. & Sup. Corp., N. Holly-wood Calif., has issued new catalog on a reraft test and service equipment.— AVIATION. Dec. '44.

Thermistors47

Information is available on new therm stors manufactured by Western Electric Co., New York City Units (initially designed by Bell Telephone Laboratories) are small circuit elements made of mix ture of metallic oxides which are pressed into they beads. AVIATION, Dec. '44

Capacitors48

General Electric Co, of Schenectady, N.Y. has issued circular announcing Lectrofilm' capacitors which are stated to be mechanically interchangeable with

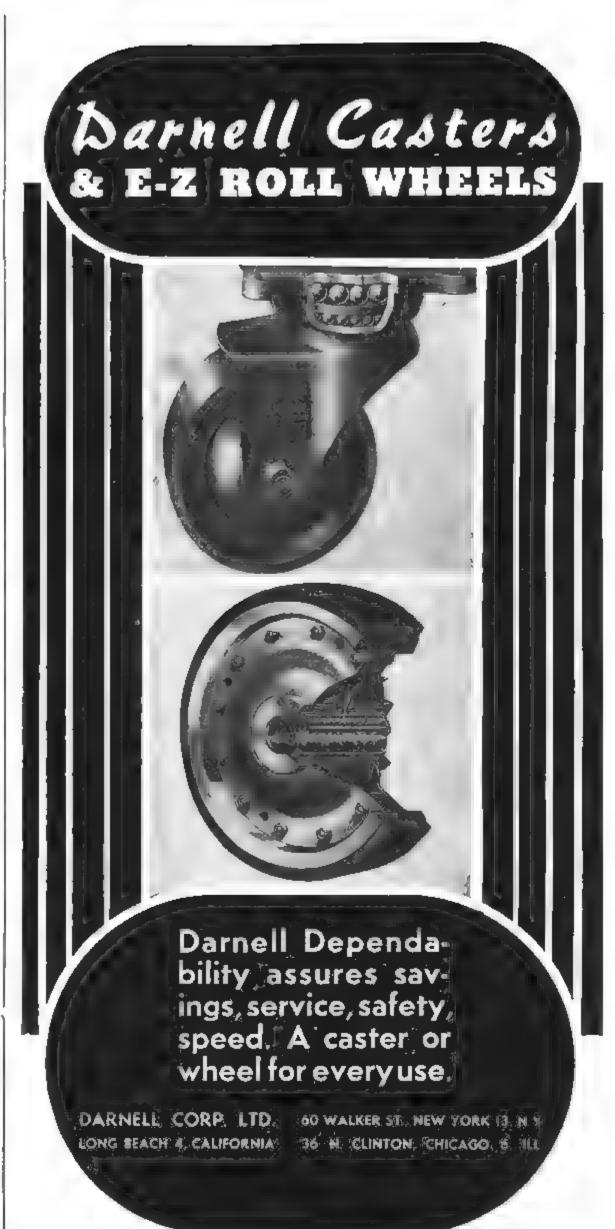

AVIATION December, 1944

m ca capacitors thits are described as suited for radio-frequency checking and by-pass app cations in communications and other electropic equipment.

AVIATION Dec. 44

Welding Equipment......49

Welding and assembly positioning equipment is pictured, diagrammed, specified and described in Bulletin No. 21a6 from Ransome Machinery Co., Dunellen, N. J. AVIATION, Dec. 44

D C. Solenoids......50

Cannon Electric Development Co. Los Angues has issued new bulletla on directed to the colenoids Tabular data dimensional drawings wiring diagrams, and response characteristics charts are included AVIATION Dec. 44

MANAGEMENT & EMPLOYEES

Duplicator51 Information is available on new "BW-Copyflex printer, stated to be capable of duplicating anything drawn, typed, printed, or libratized Maker is Chas. Bruning Co., Chicago—AVIATION Dec. 14

Buyers' Encyclopedia......52 Catalo. or, supplies and apparatus for fire fight og firet and safety, and industrial maintenance has been issued by General Detroit Corp. Detroit. -AVIATION.

Objective Tests for Workers.. :...53

New type of illustrated objective tests for workers has been developed by American Technical Society Chicago. Tests tre asserted as eliminating lengthy

written at swers. Workers identify tools, extrect operations applications, and procedures by checking illustrations—AVIATION, Dec. '44

Film on Welding54

New Horizons in Welding is title of film dealing primarily with set up for production welding. Step by-step procedure is pictured. Film has been recased by Harn slifeger outp. Milwankee,—AVIATION Dec. '44

Mabile Canteens......55

S Buckman, Inc., Weehawken N. J., has issued catalog describing Inc of mone canteens for industrial establishments.—AVIATION, Dec '44

Power History.....56

Review of man's efforts in transmitting power is topic of book at From the Shadoof to the Dom nont Drive, offered by Multiple V-Belt Drive Assn., Chicago. -AVIATION, Dec. 44

Brochure from Raybestos Div. Raybestos Manhattan, of Bridgeport, Conn., covers a mevements of mer bers of organization a worker together for common welfare—AVIATION, Dec. 44

Carbide Tool Grinding58

Grinding Carb be Tools is title of In-desirial training flux offered by No.ton Co., Worcester Mass.—AVINTION, Dec.


Airfield Turf.....59

O. M. Scott & sons 'n. Marysville, Ohio, has issued booklet on development and care of early turf considered descrable for landing he ds - AVIATION,

NEW PRODUCTS


Latest Machine Tools

Developed for boning or tapping of aireraft engine cylinders, new acning machine made by C. Al en Fu mer Co, Cincin-nate is a so ada, ted for finishing con-

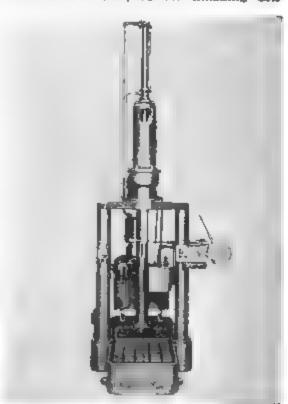

necting rods so orcharger parts, landing gear struts, and recoil cylinders. Machine can a supplied in various working stroke lengths in to 72 in., and with cylinder northy capacities up to 20 in. id. Controls or at floor level and coolant is in case. AVIATION, Dec., '44.

Milling Machine 61 Retinements in Model 3-A "Jigmili" are announced by DeVisen Machine Co. Ferndale (Detroit) Mich, and new model is called 3-B Fentures are stated to be Automatic positioning in response to precision end measuring rods and push but-

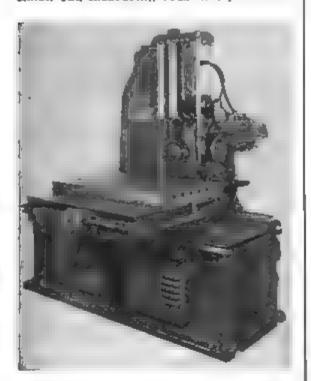

tons, teather touch controlled pressure tons, feather touch controlled pressure locking means for sides, affecting uniform treatment of a libra, improved automatic table retriction. Control station is mounted on spindle head and travels with head and operator. No electronics are employed. Five a ptors furnish power. Machine has 25 spindle speeds from 22 to 1,200 tpm. For feels use in thousands per rev. from 931 to 916. Milling feeds to table and heid are in inches per min. per ray, from 991 to 916 Milling feeds to table and he id are in inches per min, se ected with dist quarehinge mechanism providing rarge for 3 to 15 in per min Table dimensions are 30 x 48 in. Range dimensions of trave, are horizontal movement 48 in, vertical 37 in starting with center 1 in below top of table and extending to 36 in above Bar movement is 16 in and provided are extra means for resetting six additional inches. Retrection movemen, on table is 16 in Retrection movemen, on table is 16 in AVIATION, Dec., '44.

Powdered-Metal Press 62

Designed to simplify powdered metal molding operations, new hydraulic press of 408-ton capacity horizontal ram, and 360-ton capacity horizontal ram, made by Watson-Stillman Co, Roselle, N. J. is stated to feature Double acting; pulsationless pressure application; stepless pressure adjust tent, and automatic cycle controls. Micrometer adjustment of pressure is provided on working stroke. Mold size is 6 x 7 x 50 in. Pressure is provided by radial piston pump, driven by 30 hp. motor, and machine has pushbution, sciencial operated pilot valve for down and forward movements of ram, while hand lever operates return movement. Operating speeds of vertica ram are 238 in. per thin, advance and return ment Operating speeds of vertica ram are 238 in. per him, advance and return 176 in per min, pressing Horizontal ram advance and return speeds are both 216 in per min Press is 11 ft. 6 in high floor space 4 ft 2 in x 2 ft 7 in weight 25,000 in —AVIATION, Dec., '44.

Metal Cleaning Machines.......... 63


New line of metal washing and drying applicant, anno need by Opt mus Equipment, anno need by Opt mus Equipment Co., Matawin N. J. consists of standard and special types. Standard nodels cover continuous horizontal flat conveyor for series of operations and variety of work, cacinet type washing and rinsing machine for parts handled in baskets, semi-automatic, in which parts are carried in dru is, baskets, or racks, using hot blast dryer, automatic turn table, equipped for two or three operations on hollow parts or larger parts in baskets or holders. Special nachines include continuous horizontal overhead chain conveyor for spray or dip, machine with one or two chains and cross bars for with one or two chains and cross bars for one or more spray or dip operations, continuous screw, or two way rotating drun, fully automatic, for one or more treatment of arms (pentitles of small





1000 ft. 14-2 BX CABLE

PART REQUISITION

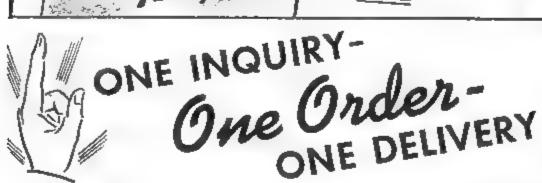

Rapid service, via GRAYBAR, is an are located so that one of them is old story to many procurement men in the aviation industry.


GRAYBAR has substantial stocks of many of the electrical materials which go into building today's airplanes. Their more than 80 warehouses all over the United States,

in or near every large aviation center. The products of more than 200 manufacturers flow to you via GRAYBAR. This great distributing and service organization now has become first Service of Electrical Supply to the aviation industry.

Distribution

A single call to your local GRAYBAR office puts GRAYBAR facilities all over America at your disposal. For Electrical supplies, call GRAYBAR first.

7 YEARS OF Electrical IN OVER SO PRINCIPAL CITIES EXECUTIVE OPPICES: GRAYBAR BUILDING, NEW YORK 17, M. T.

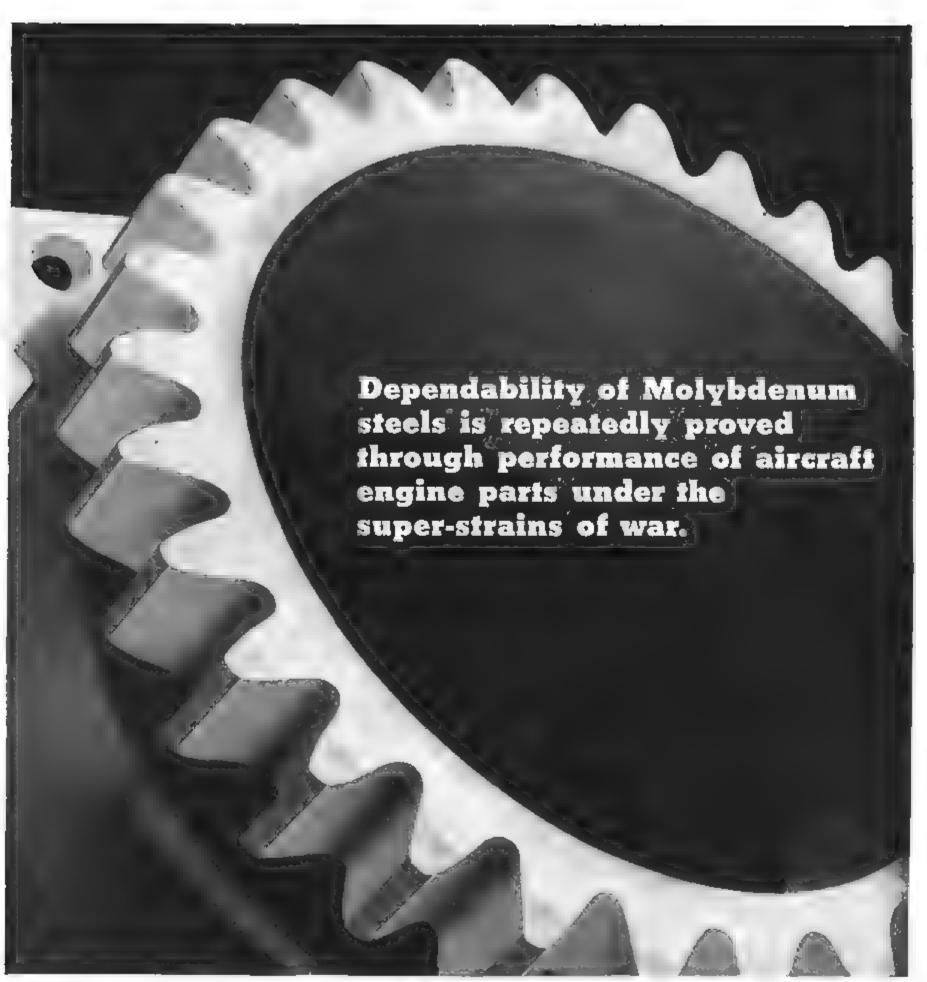

CLIMAX FURNISHES AUTHORITATIVE ENGINEERING DATA ON MOLYBDENUM APPLICATIONS.



MOLYBRIC OXIDE, BRIQUETTED OR CANNED . FERROMOLYBDENUM . "CALCIUM MOLYBDATE"


Climax Molybdenum Company 500 Fifth Avenue . New York City

parts and some specia, archines for roller searings, archift parts engines compressors, and large castings. -AVIA-TON, Dec. 144.

Hydraulic Press ...

Hydroulic Press ... 64

Caned Hydro Squeeze Gun' new portable 1½ ton capacity hydra, ic press with offset platen and ram built for pressures up to 1000 lb. pst is announced Hydraulic Mach nery, Inc., Destborn ch Employed on piston are "0" ring



type seals Ball-type switches control spring returned 4-way valve. With bot switch buttons pressed valve sciencial is energized and of under press reasy valved into gun moving fam through 1½ in stroke. Releasing one or both outtons de energizes sciencial and ram starts return. Platen and ram accompodate special adapters. Standard power uplingenerates hydraulic power. AVIATION, Dec., '44

Shop Equipment & Materials

Photo-Layout Materials 65

Eastman Kodak Co., Rochester, N Y arnounces photo-layout materuls for simplified method of printing working drawings directly on metal, consisting of ayout paint and layout paint priner Paint is sprayed on primed surface after learning brawing previously prepared with blick ink on transparent or translu




cent material is laid in contact with surface and exposite wide to are or creary vapor ights. Limiting is re inc. and metal flooded with warr, weak ammon a

writer followed by vigorous stray of tap writer which wishes away entire expose coating, caving only white area. Final thin spray of primer protects finished product -AVIATION Sec. '44.

Dividing Head .

Holding Fixture 67

Designed to cut wown set up indeloading time on inlaing machines boring



mills planers shapers, and arid presses, new holding fixture has been produced by Challenge Machinery Co., Grand Haven Mich Unit is available in three sizes. AVIATION, Dec. '44



ENGINEERS interested in faster refueling of aircraft and in generally more efficient faeling systems will find the new Wayne Collaps-g-Hose method interesting. Faciling rates of 150-200 GPM at low pressures are now readily obtainable. This means actual delivery into the plane through one hose. There will also be a Collaps-a-Hose System with delivery speed of 50-100 GPM available. In writing for backlet, please give us particulars of your own problem and what you desire to accomplish. There's no obligation.

THE WAYNE PUMP COMPANY, FORT WAYNE 4, INDIANA



Recommending use of threaded bronches, Zagar Tool Co, Clevenand, has developed new holder for this tipe bright hat has removable threaded pads latis shed in any standard result from 5.16 to 1-m. Holder shed center 5 can be adapted to fit any ask of mater 5 can be adapted to fit any ask of mater 5 can be adapted to append an cerations to ven salitable paid, the holders can be firm shed for either grooved or stotted to access in operation handle is nevel book 10 deg allowing springs to ope laws. Processes jaws around broach when had de is returned to vertical—AVIATION Dec., 44

Flooring Material 69

Stated to feel like rubber yet give long wear, 'Stoneolean , new flooring material made by Cort nental Asbestos Reforing Corp New York 'My's described as being 'self healing in that small holes fill in and itsappear under traffic fil. In and itsappear under traffic -

New Genger-Counter A ray spectrom es er mured h X ray diffract or and els work. Maker is North American Philips, N. 1 C -AVIATION, Dec. 144

Thread Gage 71

Throdenes is new type thread gage produced by Sheffield Corp., Dayton Ohio described as incorporating principles of indicator snap and thread roll-snap gage. indicator snap and thread roll-snap gage lastrument has large standard balanced type indicator graduated in 0001 in and same 'go" and 'no go 'rolls as call snap gage but top no-go" roll is not fixed, and its movement is registered on indicator showing pitch dia. Free rotating back stop is stated to enable nart to be properly located when presented to "no-go" rolls. If part passes go' rolls, lead, thread angles, and pitch are shown to be within tolerance



limits Indication of pitch dia when part is presented to no go rolls separates check of pitch dia from check of lead. If pitch dia is correct, then lead is correct Correctness of form or angle is checked visually. When part is rotated with no go rolls, indicator shows any out of-roundness—AVIATION, Dec., '44.

Plastic Helicopter Structures..... 72

New postic material developed by United States Rubber Co., Mishawaka Ind., plant, is being used for cabin struc-



tures of hemcopters. Made of Fiberglas, adminated and reinforced with thermosetting resin it is stated to be of half weight of alammum of same thickness and to have great strength and rigidity AVIATION Dec., '44

Operating with controlled torque, new in impact wrench is offered by Aro Equipment Co., Bryan Ohio, Wrench operates forward and reverse and has call rated adjusting screw on side to con



SHIPPED FROM RYERSON STOCK

TOY BAR-

 Aircraft quality alloy steel bars— 8630, X4130 and 4140-in a wide range of sizes, are in stock for immediate shipment from Ryerson plants at Chicago, St. Louis, Cincinnati and Jersey City. These steels conform to specifications. AN-S-14a, AN-QQ-S-684a, and AN-QQ-S-752 respectively and are readily available to aircraft manufacturers and their subcontractors under the ACW program. A bookfet of stocks on hand, "Aircraft Alloy Steels," including condensed specifications for AMS and ANS steels, will be sent on request,

Other steels at eleven Ryerson plants comprise over 10,000 different kinds, shapes and sizes Call Ryerson first for quick action on steel.

Joseph T. Ryerson & Son, Inc., Plants at., Chicago, Milwaukee, St. Louis, Detroit, Cleveland, Cincinnati, Buffalo, Botton, Pittiburgh, Philadelphia, Jersey City

RYERSON STEEL-SERVICE



trol tension. Control is obtained through the critical in packing a hanism, consisting of four parts. Length is 71% in , spardle offset 1 m in square drive % in and weight 2% in AVIATION, Dec., '44.





U. S. Navy's Grumman Hellcats. Escorts of the Sky



THAT OUR AIRCRAFT MIGHT MIGHT Master THE ELEMENTS



WITAL'S THE PROBLEM! 700 mile speeds? 70 before zero cold \ 50 000 foot altitudes \

A huge wind tunnel to test large models at speeds exceeding 700 mph! A high altitude chamber that duplicates the pressure and paralyzing cold of the stratosphere! A torture chamber where hydraulic tension jacks twist, wrack and punish an airplane more severely than flying conditions ever could!

With these and many other instruments of aeronautical science "worth a king's ransom," Curtiss-Wright's development and experimental engineers are mutually working toward mastery of the elements. As each triumph in these laboratories reflects itself in the skies, our nation will trade and travel by air with everincreasing safety, comfort and speed.

Look to the sky, America! Curtiss-Wright Corporation, Airplane Division, Buffalo, New York.



Push-Pull Lock Clamp 74

Described as specially suited for locating and indexing new push-pull lock clamp No. 605, made by Detroit Stamping Co. Detroit has work and tapped to receive



% in-18 standard threaded bolt which provides quick adjustment. Plunger rod travels I. I. Conversion from push to pull is made by re-locating one handle bolt.—AVIATION, Dec., '44.

Tool Tipping Method............ 75

Eutectic Welding Alloys Co., New York, announces new method of tipping carbide and high speed stee, tipped tools through use of two silver-copper and one copper alloy, now available in fine powder, into which flux is directly mixed. After degreasing and grinding, powdered alloy is apread on surfaces to be joined and carbide tip is placed on top. Assembly is heated until they melts. Each particle of molten arroy immediately "tims" and adheres to surfaces being joined—AVIATION, Dec., '44.

chromed bracket and adjustable backstop with thread checking ball point of carbide mounted in bracket, and a second identical carbide ball point in spindle (see circled portion of illustration). It has capacity of 1 in, max. work dia. and is set up with threaded masters. Three pairs of ball points, stated to be equivalent to best with a size for 36, 20, and 12 threads per inch, are furnished. Threaded parts



can range from 11 to 56 threads per inch. and up to 1-in nominal size can be checked. Other sized points are available AVIATION, Dec. '44

AVIATION, December, 1944

Feature of new grommet for 400° Series Camboo fastener is its design for use on all sheet thicknesses thus new unit can replace seven different grommets previously needed for some range. Made of steel, it is permanently secured in panel, and pre formed finge on outside is described as giving uniform strength characteristics. Maker is Camboo Fastener Corp., New York City -AVIATION, Occ., '44.

Drill Adopter 78 Salvage of broken tril's a purpose of new postive-drive co let chuck drill


adapter manufactured by Zephyr Mfg. Co., Inglewood, Calif Flat notch is rough ground on broken end of drall




Notch slides past pin located at botto is of coalet. Pin does driving coalet hous drill in a ignment and collet not locks drill in place.—AVIATION, Dec., '44.

New Synthetic Rubber 79

Dichlorostyrene' is new chemical co-pourd from which heat resistant plastic or synthetic rubber as be made, and in plastic form it is stated to have both heat resistant, and electrical maniating properties. Miner is Mathieson Alkali Works, New York City AVIATION, Dec. '44.

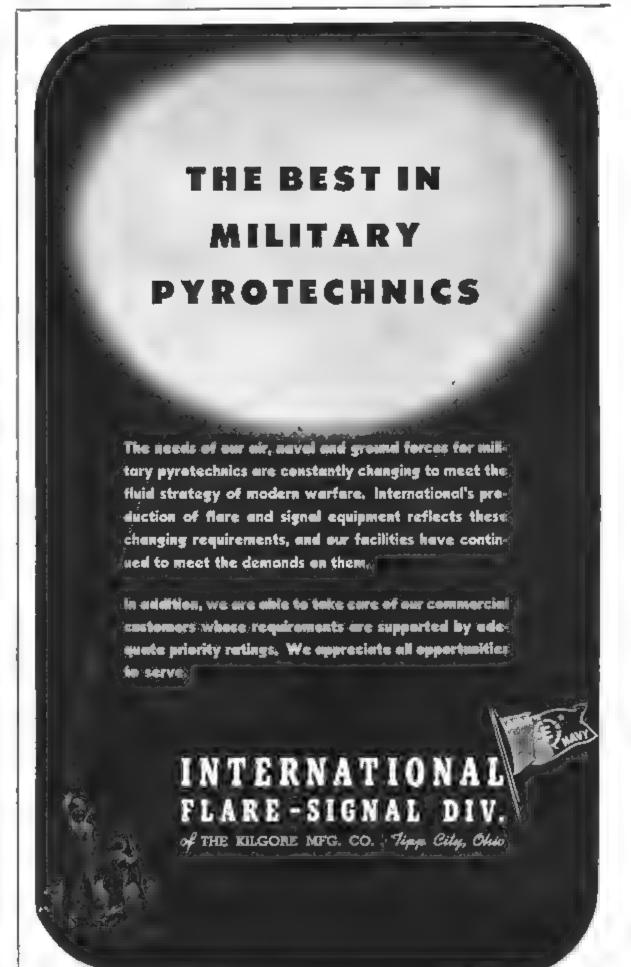



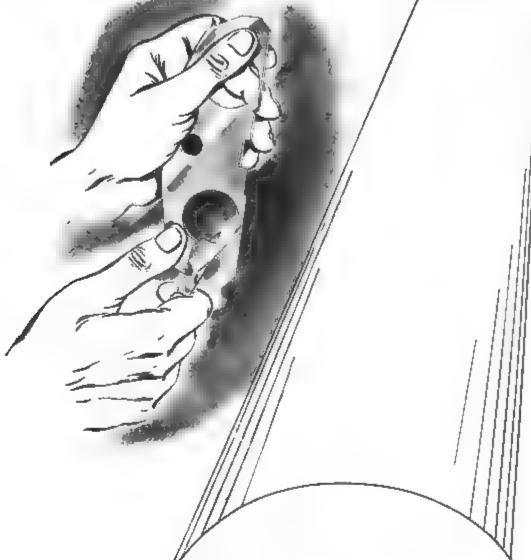

MOST EQUIPMENT MAKERS who utilize Lam mum in accurately fitting gear mesh and bearings do so primarily to reduce precision machining. But the same shim also assures accuracy of future service adjustments...too important to overlook.


Laminum shims are cut to your specifications, but for maintenance work them materials are mid through industrial distributors.

Laminated Shim Company, Incorporated

THE SOLID SHIM THAT

Snap Gage Tool Holder.

Described as accommodating any type snap gage the iding all A 1D frames and standard adjustable these tisrup styles, new snap gage too harder mendacured




by Taft-Peirce Mtg. Co. Woonstiket, R I may be can ped at any angle. AVIATION, Dec. '44

Dayton Rogers Mfg Co., Mi meapolis, non-three to pound pie make dis cushion bode in three sizes to meet the necessity of histing wo nependent blank moders or draw ring holding pressures on same compound banking, piercing and arming de AVIATION, Dec., 144


Vitrified Bonded Wheel.82

Feature of new vitrified conded dis-and whee 'eveloped as Norton Co., Waterster Mass, is ability to offer com



bination of fast cutting action with long life, along with capacity to hold sharp corner and postpone development of radii. Also reported is its ability to grind shank steel with least tendency to glaze or oad AVIATION, Dec. '44

Tests or feathering the and external leakage checking istributor varie, ether or Hamilton Standard Hydromatic projecters and nairs in Amplane Mig. & Supply Corp. Sende excite, Capacity and a essure are supplied by heavy duly GPM, hydrau a pump brisen by 2 hp. matter Filter systems designed to project promp and project or disastering age and cattle restrictions or me fouling. Two tight of the capacity and meration and called by four valves, pressure by fifth yaive. Stan and power





Delco Radio GENERAL MOTORS

AVIATION, December, 1944

252

is 220-v a.c. 3-phase 50-cycle. Length is 48 in., width 28 in., height 35 in., and weight 625 to —AVIATION, Dec., '44.

Improvements in vise-wrench manufactured by Knu-Vise, inc., Detroit, are reported obtained by use of heat treated



alloy steel forgings, with milled teeth welded to body which is also heat-treated. Wrench is available in 7 and 10 in lengths.—AVIATION, Dec., '44.


in new built-in type thermostat produced by George Ulanet Co., Newark, N. J., adjustment is stated to be simplified by elim not on of lock nut. Adjustment screw passes through two collinear tapped holes on "U"-bent bracket which imparts strong spring action on thread of adjustment and prevents its turning except man ally—AV ATION, Dec., '44.

"Incone.' is new type flexible metallic packing stated to be capable of withstanding temperatures up to 5,000 deg F. and reported resistant to corrosive gases, alkalis and nost acids. Adapted to use in exhaust systems of aircraft engines equipped with superchargers, it is described as absorbing vibration and praventing leakage. Packing is made of

cherry Livets


these two conditions which you

control on the production line

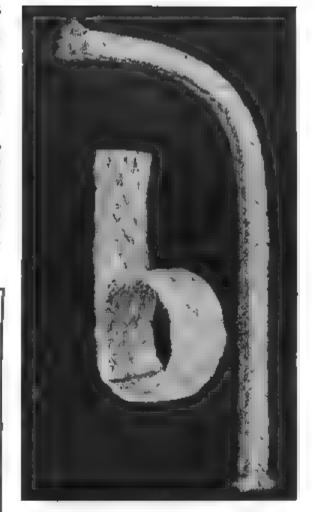

nickel-chromium iron alloy in wire form, knitted into mesh and braided Packing is offered in various forms by Johnsomanville, New York City AVIATION, Dec., '44.


New unit consisting of 4-in, bench vise and 8-in. air cylinder, pressure regulator, gage, quick exhaust valve, air hose and



foot pedal assembly, has been developed by The Bellows Co., Auron Carled "Vi-speed", it has clamping pressure cap, to 2% tons. Air unit may be purchased separately. AVIATION, Dec., '44,

Suitable for use on miller shaper,

Suitable for use on miller shaper, paner, lig borer, and drill press, new compound angle plate, made by Angle Computer Co. Los angeles is stated to enable operator to las out machine and check work without removal from machine. It can also be used as 90 deg angle plate on bonch or machine. Plate holds work in any position from 0 to 90 deg. In two planes 90 deg. apart, and



6 Usually production condi-13.00 tions are NOT the some VARIATION IN as drawing board specifi-HOLE SIZE cations Actual tests show VARIATION IN that on the line as high as MATERIAL THICKNESS 60 percent of the holes

or more over nominal due to improper handling of tools, dull drills or other couses

drilled for rivets are 008

Any rivel used under such conditions should have shank expansion great enough. to take up that much play.

Accomulated tolerances in sheet thickness and gap between sheets may vary as much as 060" depending on the number of sheets being riveled. To securely fasten and make a tight joint a rivel must have wide grip length tolerance. This is especially important where blind rivets are used

Cherry Rivets meet these two conditions -they have wider talerance in hale size and grip length than any other blind rivets.

Read pages 14 and 15 of the Cherry Manual 8-44 which show Cherry Rivet recommended tolerances in hale sizes and material thicknesses. A free copy will be sent on request Address Department A-110, Cherry Rivet Company, 231 Winston Street, Los Angeles 13, California



CHERRY RIVETS, THEIR MAN-**UFACTURE and APPLICATION** ARE COVERED BY U.S. PAT-ENTS (SSUED and PENDING. in any position within 360 deg. of tada, axis. Calibration is accomplished through use of protractors, two 5 in, and one 10 in and each graduated to half deg, with vernier graduated to 1 min and saited to have accuracy within 10 sec of arc. Each plane has its own locking unit. There are 48 \(\frac{1}{2} - 18 \) tapped holes located 1 \(\frac{1}{2} \) in apart for clamping work, also one \(\frac{1}{2} - 18 \) in reamed hole in line with radial axis of place. Height is \(\frac{1}{2} \) in , length 14\(\frac{1}{2} - 18 \) in width 11\(\frac{1}{2} - 18 \) in and weight 155 lb. -AVIATION, Dec., '44.


Heating Torch 89

Designed for concentrated localized heating, such as required for bending straightening, and shrinking of steel plate, and for silver-brazing of heavy copper plate in manufacture of pipe, new heating torch with five new multi-flame propage heating tips and three mixers is announced by Air Reduction Sales Co, New York City Light weight is a feature—AVIATION, Dec., '44.

Glass-To-Metal Seals 93 Sprague Electric Co., North Adams, Mass., has developed new glass to-matal sea, for capacitors and resistors stated to guard against leaks and moisture. In capacitors, usual ceramic terminals are supplanted by glass bushings which are sealed direct to metal container without use of adjacent metal rings. In resistors, resistance unit is encased in glass tube, sealed directly to metal ends—AVIA-TION, Dec., '44.

Resistors 94

Instrument Resisters Co., Little Falls, N J, announces new line of resistors designed for protection against deterioration in tropica, or humid locations. Each component is enclosed in Bakelite case After dehydration, resistor is sealed in special compound and case is closed with Bakelite cap. Leads are bare at point of entrance to case and are hermetically



sealed with special compound After completion of the unit, a special non-toxic fungicidal coating is applied AVIA-TION, Dec., '44.

Battery Cable Terminal...... 95

New battery cable terminal, stated to eliminate oxidation and prolong battery

Electrical Appliances

Circuit Breaker 90

Westinghouse Electric & Mfg Co., Pittsburgh, announces new 100 amp. "De-ion" circuit breaker described as requiring less space and permitting lighter structures for distribution panelboards, built-in applications, and bus duet plugtons. All ratings are stated to be available in one breaker, with uniform pole spacings and terminal arrangement. New F-frame is stated to permit a 100-amp. 600v a.c. or 250v, d.c. breaker is same space formerly occupied by breaker of 50 amp., 600v, rating Included are thermal and instantaneous magnetic trip elements and silver alsoy contacts. Both 2- and 2-pole units are available.—AVIATION, Dec., '44. Westinghouse Electric & Mfg Co.,

Aircraft Relay 91

Stated to be non-positional and to operate consistently under vibration, new 115v. 400-cycle Type 20 aircraft relay is announced by Automatic Electric Co., Chicago. Featured are high voltage coil translation and protection against high Insulation and protection against high humidity, temperature variations, and shock Weighing 9 oz., relay is normally operated by control current, interruption of which releases relay and closes alarm circuit—AVIATION, Dec., '44.

Circuit Breaker 92

New No. 1560 (AN 9160) circuit breaker for alreraft, made by Littefuse, Inc., Chicago, is described as taking 350 deg F. and 60 deg F. below zero without breaking, due to new bi-metal design stated to eliminate appreciable mechanical load on bi metal as it trips breaker. Range is 5 to 50 amp. at \$27, a.c. or d.c. It is reported capable of breaking 2,500 amp, on short circuit; to hold for one hour at 115 percent of rated current, to break within hour on 136 percent of rated current; and to break at 200 percent of its load between 10 and 100 sec. Unit is panel mounted by two 6/82 in. screws, 4 in long, for 1/16 in. panels equipped with heavy bus bars. It is 2% x 2 in deep below panel by 4 in. wide. In




diagram of accompanying litustration, (A) shows terminals, (B) contact, (C) bimetal finger, (D) Bakelite latch-block trigger, (E) latch, (F) permanent magnet, and (G) stranded copper cable.—AVIA-TION, Dec., '44.

Glass production is allocated to military use. KEEN-EYED SHOOTERS **USE RAY-BANS**

Wherever eyes are subjected to intense glare, in training or in combat, our fighters protect their vision with Ray-Bans. Long a war, Ray-Bans cut glare-producing rays to a minimum. In bright sunlight, eyes are cool, relaxed and comfortable, vision is sharp and clear.

The workers of Bausch & Lomb are producing more Ray-Ban Sun Glasses than ever before all to meet urgent military needs.

After Victory, civilians seeking visual comfort and glare protection will be able, once more, to purchase genuine Ray-Ban Sun favorite of sportsmen before the Glasses and Shooting Glasses.

> **BAUSCH & LOMB** OPTICAL CO. . ROCHESTER, N. Y.



MAUSCH # NOME IS DESIGNER AND PRODUCER OF MINOCULARS APOSTING SCOPES, RAY-BAN SUN GLASSES AND A COMPLETE LINE OF OFFICAL INSTRUMENTS



life is innounced by Leonard Mfg Co., Los Angeles AVIATION, Dec. 44.


Midget Relay

Weigning 1 for and measuring 1% x
1% x for new single pole single-throw
relay is absolute, in Guardian Electric
Mfg. Co., Theology Offerson do oply,
it is stated to have switch capacity of
double-pose double throw unit with 15
amp. contains Power requirement is
175w—AVIATION, Dec., '44

Aircraft Parts & Accessories


Aircraft Mooring Stake..... 97

Adapting standard drive anchor post foundation, Anchor Post Fence Co., Baltimore, has devised new aircraft mooring stake. Stub piece of 2% in. o.d. pipe 30




in, long with two shoes or clamps attached is driven full length into ground, exposing only ring. Next, removal of sarrounding earth to depth of 4-in exposes shoes then two 1½ x 30 in angle anchor blades are inserted through shoes at right angles to each other and driven in fush with shoe tops, after which earth is replaced. Anchors spread out under ground to width of 40 in and the downs are fastened to ring—AVIATION. Dec., 144.

Electric Auto-Lite Co., Toledo, Ohio, announces improvement in alreraft spark-plugs stated to lengthen their life. Fea-



ture is center electrode composed of drawn nicket anoy cal into which a tred and o ared a copper core providing internal cooling AVIATION, Dec. '44.

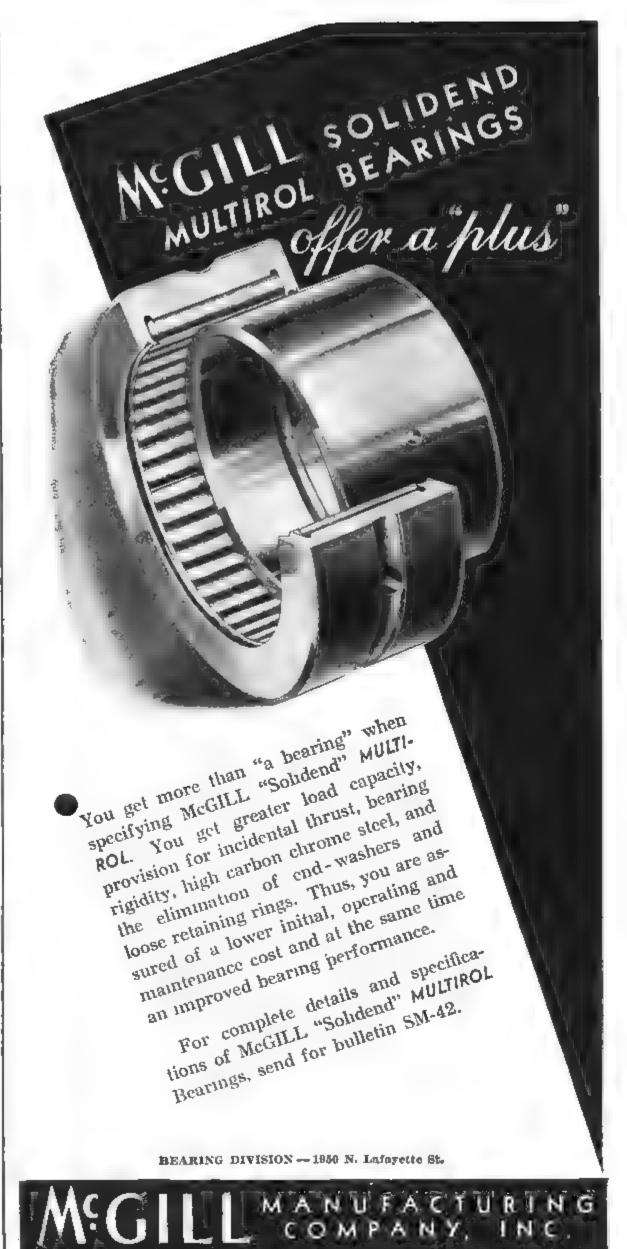

AVIATION, December, 1944

N. D. R. A. N.



"I'm too busy right now taking care of a BIG JOB for Uncle Sam, but when it's over and I come home to peace, I want to pick up those loose strings in Radio again. I've learned a lot serving with the Air Corps and that experience will come in handy when I return to my job in radio communications. But there's one thing I'm going to insist on, and that's MURDOCK Radio Phones — I'm mighty fond of their clearness and light weightand I want that same cushioned com- a SUPER-SENSITIVITY for fort later on. Yes, sir!"

For 40 years MURDOCK precision engineering has been devoted to making the keenest ears in Radio. In War and Peace, MURDOCK means crystal clear and dependable communications.

Sub-Contracts Accepted


Though most of our facilities are devoted to government work, we can make more Radio Phones and related parts for you on a sub-contract basis.

Called "1492", new brake block developed for heavy bombers by Raybestos Div, Raybestos-Manhattan, Inc., Bridgeport, Conn., will shortly be available for general use states company.—AVIATION,

Heavy Daty Brake Block...........99

Hosé Clamp100

Special construction features of new stain ess-steel flexible-band-type hose clamp for aircraft use include swivel-action nut which rocks on awivel pins and tips down when thumb screw is tight-ened, cinching band Made by Marman Products Co., Inglewood, Calif., clamp



is available in three sizes to cover entire range of AN 748 sizes 22 to 114 inclusive.—AVIATION, Dec., '44.

Developed by Eclipse-Pioneer Div., Bendix Aviation Corp., Teterboro, N. J., Type 581 supercharger regulators are designed to operate independently of carburetor throttle and to automatically control auxiliary stage of two stage engine supercharger system to produce constant carburetor air inlet pressure. Carburetor inlet pressure is automatically held constant, at any altitude within rated limits of engine, by throttling inlet to auxiliary stage. Sensitive element, consisting of air pressure and evacuated bellows, measures inlet air pressure and functions continuously to prevent pressure from dropping or exceeding setting. Auxiliary stage inlet throttling valve is adjusted by an oil-actuated servo piston, regulated by valve connected to sensitive element. War amergency power is provided by bellows which resets supercharger regulator, during water injection, to higher value. Regulator is automatically reset to normal when supply of water is exhausted or when injection is discontinued. Bellows provides constant pressure control regardless of atmospheric pressure Supercharger Regulator101 Bellows provides constant pressure con-trol regardless of atmospheric pressure or temperature variations, and it is stated that lightweight bellows assembly re-

MURDOCK'S

Exclusive Features:

I CUSHIONED COMFORT

VENTILATED for ease and

con.ness - prevents condensa-

clear and accurate reception.

4 STURDY, SOLID-BUILT by

precision methods-close tol-

5 TWO-WAY ADJUSTMENT

6 CONCEALED TERMINALS

-plus long cords for easy

Write for Catalogue

to control position.

for long listening.

ANNOUNCEMENTS-


inclusion in these columns.

In writing, emphasis upon glossy-print photos should be onclosed. Please do not send elec-

Monufacturers should address New Products Editor, AVIATION, 330 W. 42nd St., New York City 18

of new machine tools, shop equipment and materials, electrical appliances, and aircraft parts and accessories are invited for

specific aviation applications of newly-marketed items is desirable, and whenever possible



duces acceleration loads. Balanced oil control valve provides oil regulation under pressule variations. Mounted on accessory drive section regulators weight 476 th Envelope directions are 712 in. wide x 5%-in deep x 645-in high—AVIATION, Dec., "44.

Tomorrow's Metal Designs

(Continued from page 177)

were turned out in 30 sec., whereas previous methods had required 2 hr. of machining.

F. deMarmis of S. K. Weilman Co., told of bonding thin plates of copperalloy friction material to steel plates for aircraft brakes and clutches by coating with ferrous cobalt before bonding the powdered face at temperatures of from 1,200 to 1,500 deg. F. Composition of the powdered metal is about 73 percent copper, 14 percent lead. 7 percent tin, and 6 percent graphite. For the Goodyear type disk brake, the powdered ring of some 6-in. dia. with 0.75-in. face, called a "cookie," is only 0.010 thick. When sintered onto the steel disk it will operate against steel at 1,000 deg. F. and 1,000 psi. maximum, and is unaffected by oil or water.

At the shot peening round-table discussion, L. E. Simon, chief metallurgist for Electro-Motive Div. of General Motors, declared that "we believe the method represents a useful production and engineering technique that must be considered in our designs for tomorrow." Advantages of shot peening were reported to include economy of labor and polishing time, increases in fatigue durability, and the possibility of a wider selection of materials, many of which may be lower-cost items. Two types of machines were demonstrated: The air blast and the centrifugal or airless, the latter stated by its producers to be less expensive to operate.

Induction heating equipment included three general classes: Motorgenerators for lower frequencies, spark gap machines for intermediate and electronic tubes for the highest frequencies. In one full-scale exhibit the demonstration included case hardening of the teeth on a small aircraft engine clutch disk. The high frequency current is heated from 0.003 to 0.006 in.

deep-accurately controlled-in 1 sec. prior to the water quench.

New inspection equipment of importance to the aircraft industry included the Supersonic Sperrytron, described by F. A. Firestone assistant professor of physics at the University of Michigan. In operation, oil is put on the surface of the piece to be checked, then a quartz crystal is placed on the surface and an electric current passed through the quartz. The latter vibrates, sending sound waves through the metal which are reflected back from the opposite surface. An oscilloscope records the action of these sound waves in such a manner that flaws can be quickly located. It is stated that penetration is 10 ft. and that the position of defects can easily be determined. Either ferrous or non-ferrous metals can be tested, and the units can be used on pieces already assembled, such as crankshafts and connecting rods.

Prof. A. V. de Forest of MIT reported that excellent results can be obtained with magnetic particles, which actually seek out flaws in steel parts, and with the new application of fluorescent particles which light up flaws.



assembly lines busy day and night around the clock. Thousands of these precision-machined, carefully assembled, consistently uniform connectors, measuring up to highest government and manufacturer standards, are being shipped daily to leading radio and radar equipment manufacturers. In actual service, under the gruelling demands of wartime usage, Astatic Co-axial Radio Cable Connectors render most efficient and dependable service.


Actotic also supplies Microphones, Pickeps end other important products and parts for communications and sound equipment



siderable extent upon The Astatic

Corporation. This job keeps Astatic

WM. J. MURDOCK CO. 121 Carter St., Chelsea 50, Mass.

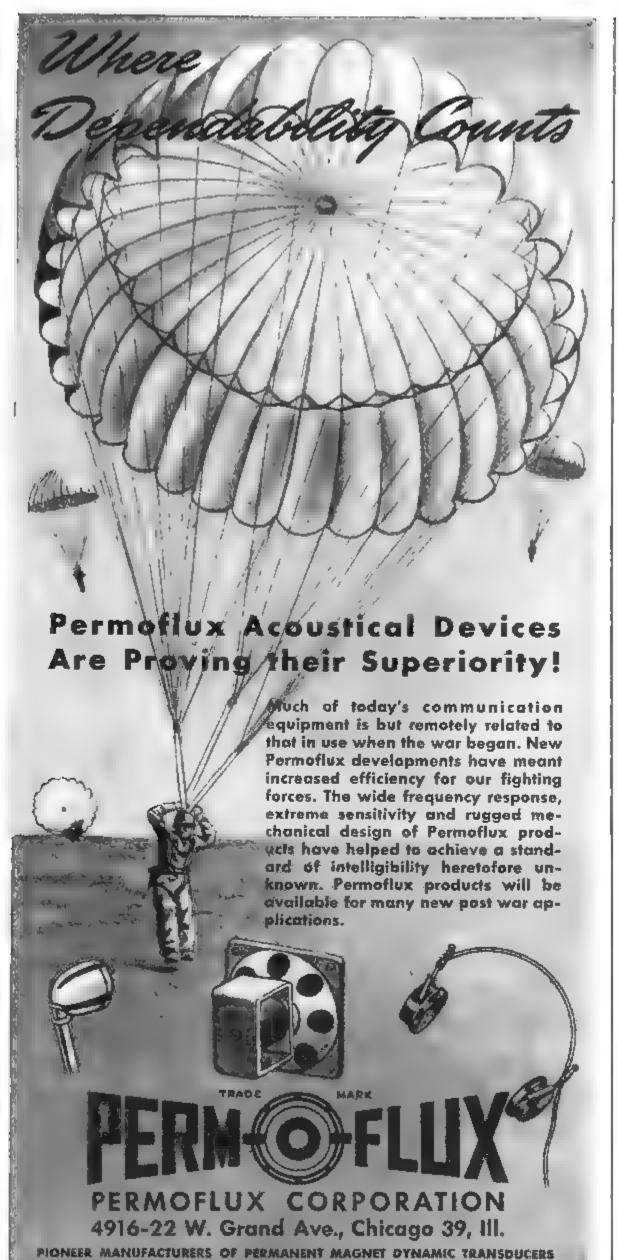

Runway Building

(Continued from page 179)

90 percent of the AASHO, standard, designation T99-38. Actual compaction frequently runs in excess of 110 percent and will probably average more than 10 percent above specification requirements.

A field laboratory under the direction of the construction engineer is provided for quick determination of compaction and other physical tests required by the specifications.

From 6 to 12 in, of crusher-run base were placed over select sand and un ported borrow. This material was laid down in two to three courses, depending upon the thickness. All crusher-run material was tested and has a required California Bearing Ratio of 80 percent or more. These tests are run on samples which were soaked four days and any material showing a swell of more than 1 percent after the four-day period was rejected.

The job involves a total of 103,500 cu. yd. of concrete paving. This is being placed in 25-ft, strips between steel headers, using three 34E Multi-Foot pavers, followed by a Blaw-Knox spreader equipped with a vibrating screen, a Viber full depth internal vibrating machine, and an Allan dowel setting machine. Behind the dowel machine the contractor has an apparatus of his own manufacture for cutting dummy joints, into which steel plates are inserted and left until the concrete attains sufficient set for their removal. The finish is accomplished with a Blaw-Knox vibrating finishing machine, followed by the final hand finish operation using wood floats and a burlap drag. Aggregate is hauled from Otay Valley and batched on the job,

Because this is the first runway construction specifying complete full depth internal vibration of the slab, the concrete placement on the project is receiving detailed study, and a series of exhaustive tests for both strength and density of concrete are being conducted.

Average concrete production to date has been 1,560 cu. yd. for a 10-hr. shift, ranging from a maximum of 2,258 yd. to 689 yd. for the high and low days.

The shoulders and intermediate area between runway and taxiway are being paved with asphaltic concrete varying in thickness from 3 to 5 in., depending upon surface conditions and anticipated load repetitions. The pavement subgrade is prepared with a prime coat of MD-1 liquid asphalt applied at the rate of ½ gal. per sq. yd. of surface. Asphaltic concrete utilizes 50-60 penetration asphalt and an aggregate grading adapted to meet local conditions and maximum density.

Asphalt is placed at a temperature of

between 250 and 300 deg. F. Placing is by means of a Barber-Greene spreader and finishing machine. To assure a well sealed hot-joint, laying of strips is limited to a length of 400 ft. before starting the adjoining strip. A seal coat of emulsified asphalt is being applied, and this is followed by the application of a sand cover.

During the period of investigation and design the Navy was represented by Capt. A. K. Fogg, USN, (CEC) Public Works Officer of the 11th Naval District. During construction the Navy is represented by Lt. Comdr. R. D. Thorson, USNR, (CED), of the Bureau of Yards & Docks. Consolidated Vultee is represented by T. W. Van Derveer, plant engineer of the San Diego division, with John F. L. Bate assigned as Engineer-in-charge of construction for this project.

Shirt On a Star

(Continued from page 125)

ent planes, for example, is being converted into a "flying show-case" by removing the jump seat and installing special hangers on which the clothing can be displayed right at the airport, where a skeptical buyer might well be given his first flight. This first flight for buyers—skeptical and otherwise—has already been used very successfully.

Among other sales aids planned are deliveries by air in the company's planes of first shipments of Cavu merchandise into new territories, with the activities tied in, of course, with the local distributor's promotion program.

Although one of the main problems today is getting sufficient material and plant capacity to satisfy demand, the plane has already proved its practicability as a time saver by speeding selling trips.

Recently, for instance, M. M. Bro-hard and Ogden left Cincinnati at 10:30 a. m., flew to Indianapolis and Lafayette, spent a day and a half in Chicago, then went on to South Bend, Fort Wayne, and Muncie, and finally returned to home base at Cincinnati—all in three and a half days, selling to at least one distributor in each of the six cities visited.

"Frankly, we are amazed at the acceptance our clothes have had," Brohard told Aviation. "We knew that tying in with flying had promotional possibilities, but we didn't realize they were as great possibilities as they are turning out to be. What's more important, though, is the fact that we can make such good, practical use of planes and pilots and thus help create employment in the aircraft industry as well as our own."



It's not the engine alone, or the propeller biting at thin air, or the slow surge of the wing de-icers . . . it's all the little and big things together that counts when the altimeter hovers at the eight-mile mark. Everything must function—give that extra value that means the necessary speed and safety.

The ignition cable that "carries the current" must not fail. It must function in the bitter cold stratosphere and in tropical heat at sea level—must withstand sudden changes in temperature in plummeting power dives from ceiling to flight line.

Packard high-altitude ignition cable was developed to meet all extremes and conditions. Sheathed in tough synthetic rubber over an inner reinforcing braid, it effectively resists extreme heat and cold, moisture and electrical corons. More Packard cable is "in the air" than any other make.



It's Not Yet Time to Break Ranks-REEP BUYING WAR BONDS

Stocks Out of Bear Pit

(Cotninued from page 187)

net working capital per share and for less than their aggregate 1941-43 earnings before reserves. The firm's statisticians concluded that market prices for these shares "gives greater reflection to the unfavorable possibilities than it does to the favorable potentiali-

The dividend situation in the industry also is favorable. Dividend pay-

ments in the aggregate will run some- appear to be several favorable factors what higher than in 1943, since a few companies have initiated dividend payments for the first time and several others have increased their total payments this year. Yet dividend policy throughout the industry has been conservative, and there is at least a possibility that some or the better situated companies will be able to continue dividend payments even through the postwar transitional period.

For the immediate outlook there also

to consider. The war in Europe is continuing longer than was expected. and most experts still talk of the Pacific war in terms of years rather than months. Regretable though that surely is, it does mean that the transition to peacetime operation may be made in easier stages than previously appeared likely. It also is plainly evident that the automotive industry wants to get out of the aircraft business as rapidly as possible. Such a development would leave the aircraft industry to take care of needs for the Pacific war largely by itself. Thus the aircraft industry very possibly will have another year of wartime volume, though on a steadily declining scale. And at the same time it will have more leeway to prepare for peacetime operations

As far as the long term outlook is concerned, there seems to be agreement only on one point: More planes will be in demand than in prewar years. Expanded air routes and a prosperous airline industry will provide larger transport orders than in the former peacetime years. It seems to be generally agreed than national defense needs alone will prevent the debacle in the industry that followed World War I. Predictions on the postwar size of the nation's air force run from S Paul Johnston's 28,000 planes up to the 50,000 estimate by William A. M. Burden, assistant secretary of cont-

Then there is the private plane. Predictions here run from 25,000 to 450,-000 in the first five to ten years after the war. At any rate the Personal Aircraft Council of the Aeronautical Chamber of Commerce lists 28 companies that have personal plane plans in one stage or another.

And it seems highly significant of the growth possibilities in this industry that most aviation manufacturers are ready to stake their resources on new designs that will have to hold their own in highly competitive postwar markets. A year ago nearly all of these companies were actively searching for new non-aircraft products.



HYDRAULIC TESTING MACHINES Pandulum load indication

. . . have repeatedly demonstrated the practical truth in the words, "One Test is Worth a Thousand Expert Opinions." Because they have simplified the science of testing the physical properties of materials they are widely used throughout the wartime industries today. Here Richle Testing Machines "ferret out" material weaknesses and defects; avoid failures before they occur. This technique of progressive testing on the production line and in research laboratories saves valuable machine and man-hours Write for descriptive literature and quotations.

is more accurate and de-pendable because it oper-ates on the natural laws of gravitation. This principle of operation is not affected by temperature changes or subject to metal fatigue. .



HYDRAULIC TESTING

Righle Testing Machine Division, American Machine and Metals, Inc. EAST MOLINE, ILLINOIS

Other Products: IMPACT TESTERS . VICKERS HARDNESS, MACHINES BRINELL HARDNESS TESTERS . MEASURING INSTRUMENTS


Contract Schools

(Continued from page 121)

people of the United States. The widely scattered location of the schools selected would have these benefits:

1. Training facilities would be provided reasonably close to the homes of the cadets, in turn reducing travel costs and contributing to high morale and keen public interest by making possible more frequent visits between cadets and their families.

2. It would spread the political and civic base of the program, bringing

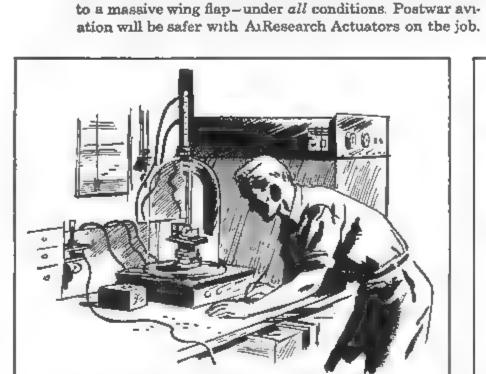

THE ELECTRICAL

Aids Peacetime Flight

Electric Actuator Yest. Here an actuator is tested under a

1980 lb. load at temperatures ranging from -65° F. to


+160° F. AiResearch Actuators must move loads ranging

from 35 lbs. to 10,000 lbs.-from a small cabin heater vent

LABORATORY

in Wartimo

Belf Jur Test. Altitudes up to 70,000 ft. can be simulated, with accurate recordings of humidity and temperature reactions. In this jar, electrical equipment that functions in both high and low altitudes is tested for thousands of hours. Through such research, improved equipment will be ready for postwar planes.

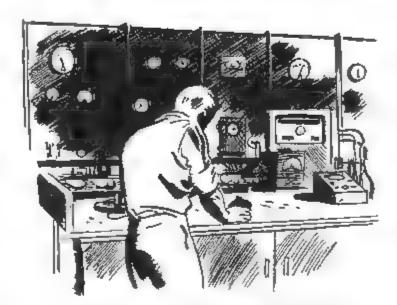

Electric Fest Panel. Through this board 208 volt. three phase, and 120 volt single phase, 400 cycle tests can be run - with variations in both voltages and frequencies. Here extensive work is done on Radio Noise, Explosion and Life Tests under simulated flight conditions . . . here safer flight is being created for the future.

In working out the problems of wartime flying, AiResearch is contributing to peacetime flight, ArResearch Manufacturing Company, Los Angeles and Phoenix.





"Where Controlled Air Does the Job" Automotic Exit Flap Control Systems . Temperature Control Systems - Engine Air Intercooling Systems - Cabin Pressure Regulating Systems - Supercharger Aftercooling Systems . Engine Oil Cooling Systems



AVIATION, December, 1944 AVIATION December, 1944


Experience Has No Substitute

The finest in materials, engineering and experimentation go into every P. S. (for Pressed Steel) Carburizing and Heat Treating product. That's why P. S. equipment stands up longer under the severest operating conditions.


Throughout the aviation industry, P. S. has become the symbol of quality, service and reliability — for there are twenty years of hard earned experience in making P. S. high test industrial equipment.

All P. S. products weigh less than ordinary cast iron products of the same capacity. That means greater efficiency, economy and easier installation.





A special Annealing and Heat Treating Basket for general use in the aviation industry. Equipped with adjustable shelves and sides, Basket is 5 feet in diameter, 5 feet high.




A group of Pickling, Dipping and Annealing Baskets Furnished in any size with perforations to your specifications. Known everywhere for their high quality and accurate manufacture.



Annealing Tubes 20 feet long, 20 inches in diameter. in high demand where the prevention of shutdowns is a must Actual operating tests have proved their life to be 30 times longer than that of ordinary tubes.

264



Round Amoy Annealing Cover. Ano her Pressed Steel product ava...ab.e in any size, shape or specification,



Pickling Ruck. Top cross members removable to assist in loading Available in all sizes up to 10,000 lb. capacity.

BUY BONDS NOW!

The Pressed Steel Company

OF WILKES-BARRE, PENNSYLVANIA

BRANCH OFFICES Broad St. Station Bidg., Philadelphia \$12 Curtis Bidg., Detroit; 608 Micholas Bidg., Toledo 1915 Engineers Bldg., Chicago: 51 E. 42nd St., New York 1005 Sterling Bidg., Houston, Texas: A & M Accessories Ltd., 19 Melinda St., Toronto greater support and understanding from the people who must support it.

3. It would encourage more rapid development of civilian aviation through its constant reminder that flying is continuing and increasing. Each such school could become the aviation hub of its territory, constantly providing healthy stimulation to flying activities in its area.

4. The schools could provide facilities for the refresher and flying status maintenance courses the reserve pilots will require, closer to their homes, permitting reserve personnel an economical opportunity of maintaining flying status.

American history is filled with proof that proximity plays a vital part in public approval, and willingness to pay for, military expenditures. The Coasts have always favored a strong Navy. Communities and states with Army posts have never demanded that they be abandoned. And it is reasonable to expect that a strategically dispersed Air Force training plant would achieve similar understanding and support.

Would Assure Sound AAF

With nationwide support of this primary phase of civilian-military pilot training in the postwar military aviation program, its continuation on a sound basis would be assured. This, in turn, would backlog all other sections of the aviation industry, which is essential if the excellent USAAF is to avoid the decay which finally destroyed the French air force after World War I.

Economic gains and operational changes will inevitably result from the war. When Gen. Arnold cast aside military precedent and asked civilian operators to take over responsibility for the primary training of Army Air Forces cadets, it was probably considered by some to be a necessary, but possibly costly, temporary expedient. Instead, his vision has been fully justified by the high quality of cadet graduate, the unbelievably low accident rate, the extremely high graduation record, the tremendous saving in cost to the taxpayer, and the value to national security by the maintenance of this broadened and immediately available background of civilian aeronautical training bases.

The continued use of civilian schools for this military training appears to be a fortunate aid in the development of an essential postwar air arm on a satisfactory basis in accordance with the American way. Retention of this unique training method is obviously the best way of giving our Air Forces more support at less cost in dollars and manpower than could otherwise be obtained.

Handley Page Bid

(Continued from page 183)

The Hermes will be powered by four 14-cyl, sleeve-valve radial aircooled Bristol Hercules engines delivering a maximum of 1,600 hp. each, turning four-blade de Havilland hydromatic full feathering propellers.

Maximum speed is anticipated at 340 mph., weak-mixture maximum cruising speed is scheduled at 289, and longrange economical cruising speed is put at 240 mph. Wing tank fuel capacity is set at 2,750 imp. gal. (3,300 U. S. gal.), giving a maximum range of 2,000 mi, against normal headwinds.

Hermes design includes four cargo, mail, and baggage compartments, with total capacity of 630 cu. ft.

Service Brings Business


(Continued from page 195)

go miles out of their way for this kind of service is proper handling of ships when they land. Too often one taxis all around the field and hangar line before anyone comes out to direct parking or show where the gas pit is located. The net result is this: The transient finally stops his engine only to find he's several hundred yards from the gas pit or in the way of airplanes being wheeled out of the hangar. This means more work for hangar attendants to move the transient ship and additional delay to the pilot if he's in a hurry to get service and be gone.

At Jennings Airport, line attendants are on the alert for landing airplanes. Before the pilot has completed his landing roll and has started taxiing toward the line, he sees a lineman with a checkered flag.

The black and white flag, standard Army signal for directing parking, indicates that the pilot should come to the man holding the flag and follow his instructions. The Jennings lineman designates a spot for the transient to park and stands in front of the left wing (on the pilot's side) to direct actual parking. Before the pilot stops his engine, his servicing needs are ascertained and, if gas is required, he is directed to the gas pit. All ships are tied down immediately, assuring visiting pilots protection for their ships if the wind comes up while they're in

To give proper attention to all aircraft a loud outside bell is rung by the office girl. One long ring indicates the arrival of an airplane and calls linemen. who may be in the hangar, to come to the line. Local ships are also handled in this manner on the assumption that any inexperienced students should be watched closely while taxiing near

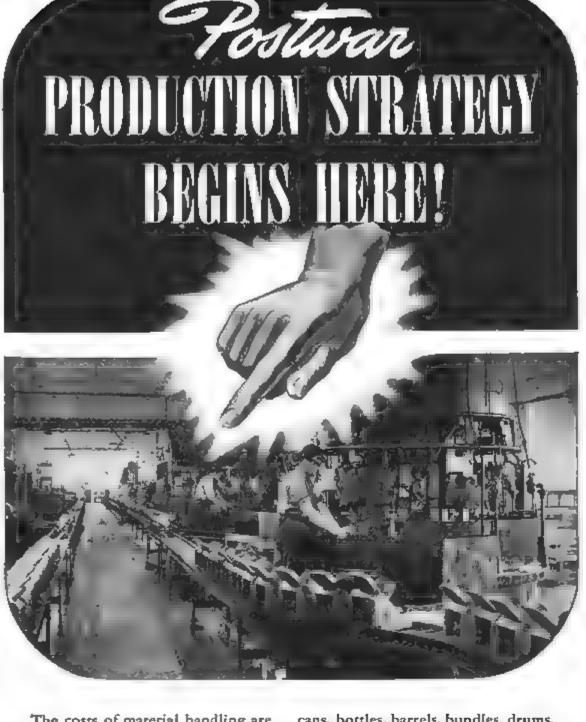

The costs of material handling are known to be excessive—they add to the price of the finished product but contribute nothing to its sales value. Cut these costs and you gain a tremendously important competitive advantage.


Conveyors and conveyor systems, adapted to your particular operations, speed up material and commodity handling activities, pull handling costs down to an economical level, speed the flow and movements of production. Conveyors handle a wide range of commodities - parts, packages, units, cartons, cans, bottles, barrels, bundles, drums, boxes. They are built in light, average, or heavy-duty types for either portable or stationary use-in a wide variety of sizes, styles and lengths.

Standard builds roller, belt, chain, slat, push bar conveyors, spiral chutes, tiering and lifting machines, portable pilers, and pneumatic tube systems, for every type of material handling and is equipped by experience and facilities to reduce your handling costs with the right type of equip-ment. Get the profitable answer to your material handling problem today. Write us for Bulletin No. A-124

STANDARD CONVEYOR CO.

General Offices, North St. Paul, Minn Sales and Service in Principal Cities





AVIATION, December, 1944

parked airplanes. Due largely to this Bamberg, S. C., started 8-hr. solo system there have been no taxing accidents or collisions at Jennings,

As a result of improved operations, coupled with a moderate advertising and promotion campaign through local papers, a steady increase in student business has been witnessed. Students have been derived from a number of different categories. Many have been younger boys, about to enlist in aviation cadet training, whose parents were anxious to have them receive a little advance time in the fundamentals of flight. Just recently nearly 20 cadets result has been that a number of them from Carlisle Military Academy at have already bought used airplanes.

courses under academy supervision. Energetic Manager Crocker has also helped organize a club at the local high school, and many boys and girls from this organization are expected to start flying soon,

Many students are business men and other substantial local citizens who contemplate owning their own postwar airplanes and are preparing for personal flying by getting their licenses now, Hawthorne's advertising has featured this type of training. The

Typical owners at Orangeburg are Gus Browning, a Luscombe owner, who runs a local radio store; Louis Pearson, superintendent of the water works, who owns a Taylorcraft: Tom Summers, a Laylorcraft owner and jewelry store operator; J. T. Green, nearby theater manager and owner of a Stinson Voyager; and others.

The increase in airplanes at Jennings caused an immediate shortage of hangar space. The regular hangar, holding around ten ships, was soon overcrowded. Five portable, individual tee hangars were purchased in New Jersey, shipped to Orangeburg, and erected west of the main hangar, setting a logical pattern for any small or large municipal airport.

This is the principle of having a main hangar for storage of planes in every-day use (such as the operator's training ships), with construction of individual hangars for private planes used occasionally by their owners. Hawthorne contemplates putting up additional hangars as materials are available, realizing that they represent an excellent source of revenue.

Efficient use of available land was accomplished by laying out the tee hangars in the form of a "U". With the exception of the interlocking tee hangars, this layout is most economical of available land. Storage rates charged for bangar space at Jennings are \$15 for planes of three places or less and \$22.50 for larger craft. No premium is charged for individual bangars.

The increase in aircraft has brought about a brisk shop business. Headed by A. C. Oxner, three full-time mechanics are kept busy doing work on local ships and planes from near-by points. The hangar includes a small shop, large enough for re-cover work, and recently a 20 x 40-ft, lean-to has been added to the west side of the hangar. Large enough for a complete airplane up to the size of a Waco, this lean to facilitates work on engines and aircraft since the plane being worked on is not subject to constant moving when other planes are brought in and out of the main hangar.

Consistent with maintenance needs, shop equipment has been enlarged. Some of the essential tools and machines needed for small airport maintenance found at Jennings are a late-type Sioux valve-grinding machine, a large air compressor for spraying, a large drill press, a magneto testing machine, magnet charger, and welding equipment.

As with any other wartime business, the manpower situation has brought headaches to Jennings. Probably the only unique advantage enjoyed over other small wartime airports is a working arrangement for instructors from




ACCURACY

The surgeon's deft hand is clumsy in comparison with the ex acting requirements of Millord's shop standards.

The building of precision fasteners for Uncle Sam's aircraft exactly to specification—accurately, smooth, v inished and delivered on time-has resulted in a vastly increased capacity for accurate service in the peace-time production of rivets, Phillips recessed hend acrews, and other lastening devices in which MILFORD

Accurate FASTENING SERVICE is also your privilege, whether or not MILFORD be your source of supply for fastening devices. We are always interested in working with "hard to satisfy"



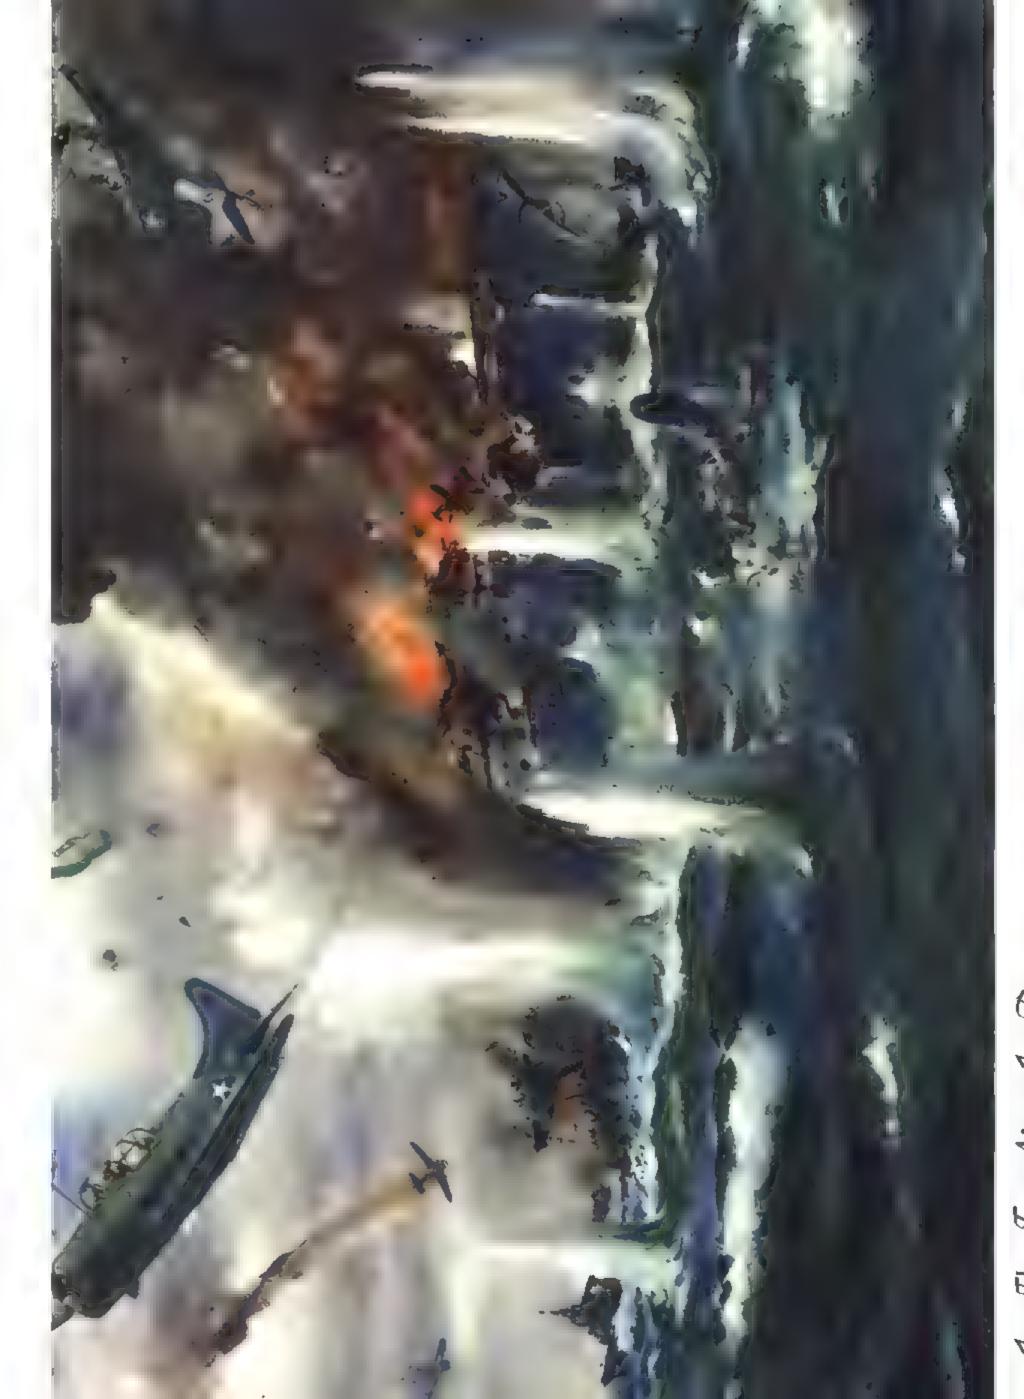

"I'M GETTING TUBE TURNS' OPINION

ON ITS FORGE-ABILITY"



would improve . . . or a present forging job that could be bettered in precision, cost or service.

We welcome opportunities to tackle difficult upset or press forgings, in either steel or light metals. At Tube Turns you'll find a stimulating kind of cooperation — in which practical forging skill and engineering knowledge are accented by resourceful thinking and original techniques. You'll find laboratories that offer virtually every modern method for mechanical, chemical and electrical research and testing. You'll find ample production facilities for volume output plus exacting accuracy — upsetters and presses in sizes up to the largest, heat treating furnaces of the most recent types and one of the largest die shops in the country.

That's why you often hear it sand, "I'm getting Tube Turns' opinion" . . . and its sequel, "We're giving Tube Turns the job."-TUBE TURNS (Inc.), Louisville 1, Ky.

DO ANY OF THESE STEEL AND ALUMINUM FORGINGS BY TUBE TURNS GIVE YOU IDEAS? TUBE TURNS Forgings for Industry

the Army primary school operated by Hawthorne. The Army program calls for instructors to fly from 8:00 a.m. to 1 00 pm one week and from 1 00 pm to 6:30 p.m. the alternate week.

Men with previous operating and business experience have been selected from the Army school to handle student work and general flying at Jennungs during the half day when they are not flying Army students. These instructors are Edward F. Slaughter. who ran his own textile machinery business in Charlotte, N. C., before the war, and F. Sibley Law, a textile manufacturing executive from Spartanburg, S. C. "Bud" Crocker, Airmotive's manager, was formerly an Array instructor, and before the war he spent eight years managing one of the largest drug stores in Toledo, Ohio. He was also a professional golfer.

A check of the other personnel at Jennings, and a consideration of their duties, affords a representative picture of organizational requirements at a small airport capable of adequately handling nearly two dozen permanently based arreraft and an increasing number of transient ships.

Two girls working in alternate shifts are employed in the office. This is one phase of the operation which is often overlooked. These girls are on duty continuously from 8 in the morning until flying stops at sunset. They handle the phone, cash, billings, student records, and other general bookkeeping and office work. Their presence is considered essential by Manager Crocker since they relieve him and other pilot personnel from much of the detail work of accounting and handling cash and records. The girls see to it also that visitors are received properly and handled courteously and that the phone does not go unanswered, a sure cause of scaring away business at most air-

The line crew is recruited from high school boys interested in flying. Normally four imemen are on duty at all times. Attired in standard Hawthorne coveralls, they present a next appearance. They are drilled to serve, both properly and courteously, all plane owners, students, and transients

Development of facilities has been accomplished on a what-the-businesscan-afford basis. From the start, new equipment and additions have been added only as prospective and existing business warranted. In no way has the large backing of the Hawthorne organization supported operations at Jennings-in short, no "angel" has puniped in money.

One of the most striking and important improvements made under this policy has been construction of a very inexpensive porch at the operations

From newly established positions,

portable beacon units guide and warn supporting ships and aircraft. Their electric generating plants are powered by rugged, quick starting Briggs & Stratton engines - another one of many vital war services by hundreds of thousands of Briggs & Stratton engines.





BRIGGS & STRATTON leadership in design, engineering and precision manufacture is backed by the performance record of more than TWO MILLION Briggs & Stratton engines -- and a quarter-century of continuous production of "aircooled power." You can profit by this experience in your plans for the future whether you manufacture, sell or use gasoline-powered equipment or appliances. BRIGGS & STRATTON CORP., Milwaukee 1, Wisconsin, U. S. A.

AVIATION, December, 1944



hut. At a total cost of less than \$50, this addition, measuring 20 by 10 ft, has added materially to the hangar-lounging facilities. A number of comfortable porch chairs were installed on a flooring made up of crushed gravel.

"We can definitely see, in actual dollars and cents," says Crocker, "profits from the construction of this porch Quite a few people are spending their evenings and Sundays enjoying the shade of this facility and watching the airplanes. As a result, many have started flying because they have been exposed to it in a comfortable manner, have talked with friends who have just taken a lesson, and have, thereby, become interested. In many respects our little porch is becoming quite a meeting place and bull-session center for flying enthusiasts."

Expansion of both office and inside lounge facilities, somewhat along the line of the airport country club idea suggested by the author in "More Fun at the Airport" (Dec. 1940 AVIATION), is contemplated when further construction is possible

Neatness of premises, always a fetish of Beverly Howard, is predominant at Jennings. Borrowing from Army procedure, neat metal sand-filled receptacles, about 1½ ft sq are placed at strategic points to receive cigarette butts, scrap paper, etc. The grounds are policed regularly by linemen.

Recognizing the fact that transient pilots appreciate a snack and a "coke," the office stocks crackers, sandwiches, soft drinks, and eigarettes. This also agrees with local residents who, in true South Carolina tradition, won't linger anywhere very long if they can't get a coke. More important, though, this service has developed as a reasonable source of revenue, for weekly sales average around \$75. A small show case in the office displays log books, accessories, and a stock of some of the most commonly needed light plane parts. Hawthorne Airmotive is also a retail outlet for Hawthorne Aero Supply, a new aeronautical supply house. A full file of aeronautical charts are available as well.

Flight equipment currently operated includes two Piper Cubs, a Porter-field, and two Taylorcrafts. Rates charged are \$6 solo and \$9 dual. A 450-hp. Beechcraft, owned by Beverly Howard, is available for charter business, a fair amount of which has been booked

In addition to these ships, planes stored at Jennings include four Wacos, four Cubs, two Aeroncas, two Taylor-crafts, a Luscombe, a Monocoupe, a Stinson, a Stearman, and a Bowlus sailplane.


Traffic is handled on a standard



rough going in tanks necessitated a radio relay that wouldn't be knocked "slap-happy" by vibration and shock. The BK-13 is such a relay. It protects receiving sets when the transmitter is operating by shorting receiver antennae to the ground. In it, Callite Silver Contacts provide a long-wearing resistance path. The Parker Engineering

Products Company of New York chose our contacts for this important job. Callite offers you highly specialized experience in selecting contacts. It will pay you to have our recommendations in planning post-war products. Callite Contacts include standard and special shapes in tungsten, molybdenum, silver, platinum, palladium and alloys of these metals. Send for Contact Catalog No. 152.

Callite Tungsten Corporation, 545 Thirtyninth St., Union City N. J. Branch Offices: Chicago, Cleveland.

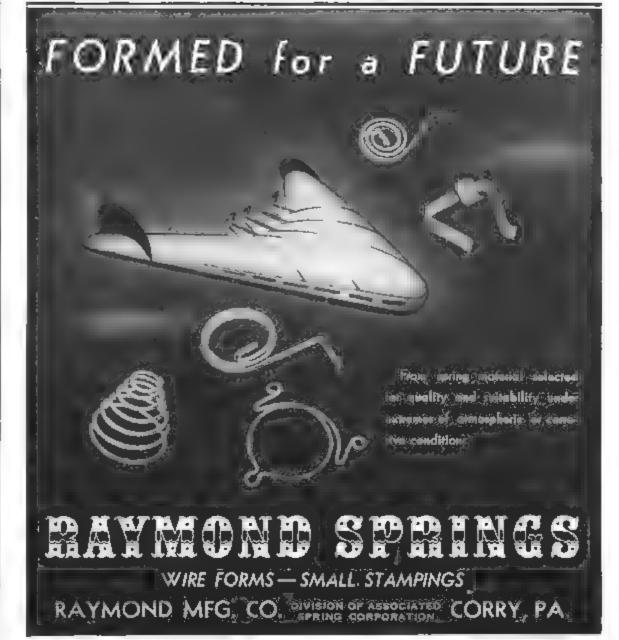

rectangular pattern, and while diagonal and is less than 2 nn, from the center takeoff's and landings are possible traffic is always set either east or west in line with the longest dimensions of the field.


The notable success of these twoway operations, despite frequent crosswind conditions, indicates conclusively that small cities planning conservative airports can provide adequate landing facilities with only one runway.

Handiness a Feature

unique success could not avoid noting that it is barely outside the city limits off

of town. The fact that students and plane owners can reach the field in five to ten minutes has been instrumental in the fine growth of activity at the field.

What has happened at Jennings could happen at nearly any airport. The simple ingredient which has made the operation profitable has been the realization that running a flying service is no different from any other kind of business. Neatness of prem-Any discussion of Jennings Airport's lises, genuine service to the public, and business-like management always pays

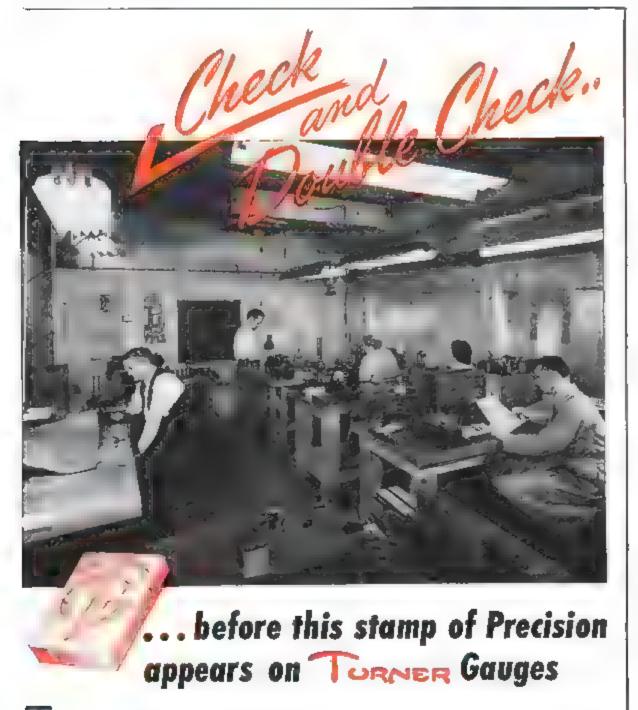

I HE VERY last operation performed on any Turner Gauge before packaging is the application of the Turner Stamp, which you see reproduced above. Prior to this, every Turner Gauge has been checked and double checked in our air conditioned, temperature controlled inspection room. It is your guarantee that all checking surfaces are accurate to your specifications.



Boeing Stratocruiser

(Continued from page 181)

lb. of goods and featuring a drive-up ramp in the rear and special internal cargo-handling equipment.

According to the company's calculations, the direct operating cost would be but le, per passenger-nule in the passenger version and 5c, per ton-mile in the cargo craft

Ship maintenance, states Boeing has been designed to be as striple as possible to keep indirect costs low, with the fuselage constructed so that equipment and mechanical operating devices cobe serviced as conveniently as possible on the groun and likewise can be reached in flight for enroute checkups All tour power plants are interchang able and are state to me u e approved mail tenance features.

Boxing ad a that it has don been concucting assign work in several offer type craft to pect posessur needs including feeder-line planes and localservice aircraft

The company's detailed specifications and performance data on the Merel 377 are given below,

Specifications and	Performance
Span	ы1 и 3 в
Lie agth	10 t 4 n.
Height	\$3 11 5 mm
Weight emit	7 / / / / / / / /
Arganger	l4 lb.
	3 / 1
1, 18 cv + 01 2 c)	take of his each
£ 1 . 1	C1890 rated
Seel his lone on	4 A. ph. and 4 April
(1	3 300 m
Ozer tag sed g	v ha it
Proplets +	6 11 7 11 1
	is a case of nels
1116 6.9	the sales
Wig section Burning 1.	
T d a re-	Marrie La H 29
Fire ge oper is M	lay a psystem i
11: 2 5 4 6 1	15:
Morroscope caler feet	eth y
Passerger c b. l. vers o	a 1 b passe a
Passenger Jap Steeper	It to e gers
36 heeds p	to 74 ge seats
Crew transcertor is	3 ape at 1 g 2 m
	ward's dept
Crew, transocean	A guerat og 3 h
	ten d's lept
Carrie p striger ver-	40' 251 cH L
Carlotte cate an daired a sa	221 - 1 6 47 6
44131	e trace 5 if the

Repairing 'Round the World

(Continued from page 193)

At this point, the mechanicommandos were closer to the battle hae than any other service organization in the 9th Air Force, which was then operating out of Cairo. Immediately followmg the makthrough at the Mareth Line, a forward echelon moved to Katronan, Tunisia, to operate from advance airfields only 15 to 20 mi behind the front. At Castel Benito, servicing began for the famous "Earthquaker" medium beribarditient group inc. the two American fighter groups supporting the British 8th

The entire Castel Benito Airdrome,

AVIATION Decober 1944

one of the largest in Norta Africa, vas i under the complete control of the wandering ASC men; they operated the Air and Freight Service, which was growing to gigantic proportions. The Air Freight section handled 350,000 tons of freight a week. Base Operations was handling 53 passenger planes a day and 1,000 passengers a month The finance section of the group was paying 43 different American units in forward and rear areas with a payroll amounting to more than \$650,000 a month. Base workshops had been erected in the spacious Italian hangars and third and fourth echelon work was performed,

The acvance clement of the organzation, then at Kairouan, was doing on-the-stot repair work at the basis but whenever third echelon work was required, the planes were sent back to Tripoli and the base workshops.

At this point American rations were available for the first time in six months and, naturally, a noticeable improvement in morale was noted Movies, too, were secured and from USO shows were diverted from the American organizations in North Africa for a one-day stand at Tripoli Jack Benny and his troupe appeared, as did the Bob Hope slow

As the tempo of the Allied attack increased, the soldier-mechanics began to work a 24-hr. day. The advance elements in Kairouan and later in Sfax, Tunisia, were also working full capacity. The lighter groups at these fields were flying seven and eight missions a day, necessitating frequent engine changes and general overhaul o planes and equipment.

The Tunisia heat started bothering the men the latter part of March, when temperatures ran well over 100 deg for weeks at a time. Tools became too hot to handle; men received seconddegree burns merely by touching the planes. Finally, it was decided to work early mornings and then evenings until dusk only. Subsequently, in the afternoons, swimming parties were organized, trucks taking the men to Sousse, Tunisia, 35 mi. away, on the coast. It was found that the men were able to work with greater efficiency in the cool of the evening, and greater benefits were derived by all I concerned

The Tunisian campaign came to a sudden close on May 10 and the entire group heaved a vast sigh of relief From the moment they arrived in Africa, in Sept. 1942, to the close of the campaign they worked at top speed. repairing, servicing, feeding, clothing paying, and providing conmunications for the many Air Forces organizations working with the British 8th, After short furloughs, advance elements tooyed back to Calisway Turasia.



The fast-action all-around-yourplant load-handler



Ronstabouts are engineered and built for years of overworkrugged construction, ball-bearing boom turntable and operating parts run m oil.

BIG crates onto truck . . . heavy stuff off or on a freight car . . . overhauled engines remounted to aircraft . . . scrap metal loaded with a magnet . . . bales, drums, boxes picked off a high pile-or stacked there . . . machines moved ... hundreds of different load-handling jobs - and your Roustabout is always ready, where and when you want it. It's most kinds of material handling all in one, mobile, versatile, powerful, saving time, cost, manpower. Hundreds of industries report their Roustabout Cranes invaluable, indispensible. Make one of these handy action-getters a part of your plans for postwar efficiency and expense cutting - write for the whole story, today.

THE HUGHES-KEENAN COMPANY 637 NEWMAN STREET + MANSFIELD, OHIO



AVIATION December, 1944




PLUS-FIFTY DUGAS DRY CHEMICAL WILL BE NEEDED HERE ...

to get BIG.

Things like this should never happen. But they do-and that's why DUGAS Extinguishers with PLUS-FIFTY DUGAS Dry Chemical should always be within easy reach.

Flammable liquid fires...flammable gas fires...electrical equipment fires all yield quickly to the fast fire-killing action of PLUS-FIFTY DUGAS Dry Chemical.

> Approved by Underwriters' Laboratories and Factory Mutual



Immediately on striking flames,

PLUS-FIFTY DUGAS Dry Chem-

ical releases fire-smothering gases

that quickly extinguish dangerous

fires. Small fires don't have a chance

PLUS-FIFTY DUGAS Dry Chem-

ical is non-toxic, non-corrosive and

non-abrasive. Hurts nothing except

fire. For all the facts, write today!



ANSUL CHEMICAL COMPANY, MARINETTE, WISCONSIN DUGAS DIVISION

where the fighter groups were engaged in sea sweeps off the coast of Italy and in escort work in support of the American and RAF bombardment groups pounding the beaches and cities of the Siethan Island.

Suddenly the advance elements of the outfit moved to the Island of Malta The initial American organization to be stationed there, it raised the first American flag ever flown by a military unit on the historic island. The organization did not move into operation on Malta, but merely marked time with the fighter groups which arrived shortly afterwards. Everybody waited for the Sicilian offensive to start.

This campaign found the Service Group back at work again and happy, for enforced idleness had begun to get borng. The opening days of the campaign brought daily raids by the Luitwaffe. None of the personnel was created and the men continued to service the P 40's of the two figurer groups they had become acquainted with back in Tripoli.

Living conditions in Sicily were crude. Because of the necessity of traveling light, the men had brought the barest of clothing and working equipment. There were no beds, tents. or permanent camp areas. Everyone slept on the ground beneath the wings of the planes being worked on, Food was always scarce-C rations were eaten three times a day

A courier air service was maintained with the rear echelon headquarters in Castel Benito, and essential parts, replacement clothing and other items were flown to Sicily whenever demanded by the advance party. The capture of Catania, Sicily, by the British 8th marked the turning point of the campaign, and ASC personnel were among the first Americans to enter the

In 38 days the campaign ended, as dramatically as it began. The rest period didn't last long, however, for the Italian invasion was then launched Six days after D day, the Service Group was on the move again, into Italy, following in the wake of the British forces.

The swift British advance up the heel and toe of the Italian boot found these mechanicommandos struggling along in an endeavor to keep pace, During this first month of the campaign, the outfit didn't have time to get all its equipment unpacked. By the third month, the battle line was stabilized and the men were able to put up tents. unpack all their tools and equipment, and operate with their full resources.

At this time the globe trotters had men strung all along the western coast of Italy, repairing planes which the rapid advance had dictated be left

behind. The rear party, which had been operating out of Castel Benito, Tripoli, all this time, then pulled up stakes, and for the first time in over five months the entire Service Group got together again on the plains of Foggia.

The Italian Chamber of Commerce was caught red-handed here, for the much vaunted "sunny" Italy was a great disappointment to all the troops who sloughed through almost con-

tinuous mud and rain

American rations became plentiful for the first time since the outfit arrived overseas in 1942 These rations. plus fresh fruits and vegetables secured by local purchase, made the daily menus a real treat. And for the first time since the start of the Sicilian campaign the men were given passes. A rest camp was established on the Adriatic coast where the men could forget the war and relax for a week Outstanding food was served at this camp, and the men were free to come and go as they pleased. Sports were available for all

At the start of 1944 the men plunged back to work again when startling news was announced: They were going to the China-Burma-India theater.

India, however, proved merely a stopping place on the way to China. The travelers did not go into operation there in any sense of the word, They were given opportunities to visit Bombay and Calcutta and generally rest up a bit after the long, tiresome journey from Italy,

Then came the journey to the Assam Valley and the flight over the Hump to China, where conditions were as pleasing as they were surprising

For the first time in 23 months they were able to sleep in barracks, on clean sheets. Showers with hot and cold water were at their disposal whenever they wanted them. The mess was far different from what they had been accustomed to. Instead of mess kits the men are now eating from spotless dishes. Instead of weary monotony of emergency rations, they now eat tasteful Chinese food interspersed with plenty of beef and steaks.

This unusual condition prevailed because the forces of Air Service Command had been commissioned some time ago by Gen. Chennault to do all the housekeeping and ground duties required. Result sector command men became the cooks, bakers, butchers, landlords, telephone men, policemen, carpenters, engineers, and what-all, for the air operational units in China.

Greeting Col, Cunyus on his arrival in Cathay was Gen. Joseph W. Stilwell. The colonel told the general that there was just one place left for his outfit to go and that was home-but only via Japan They'll make it, too!





Your Local Market

(Continued from page 124)

civilian population in your territory figures which can be obtained from local newspapers or Chambers of Commerce—apply the present OPA national average figure of 33.6 percent or the previously-noted 10 percent to determine the number with incomes above \$2,500 per year. Of this group take 1 percent, the amount estimated to be the first prospects for a personally owned plane

Adding the number of service airmen, registered owners and pilots, and the civilians gives an estimate, based on national averages, of how many prospects you have on which to build your plans.

Each individual dealer, though, must estimate how many of those prospects he can sell and how many his competition can sell.

As a starting point to determine where these prospects are located, the local Chamber of Commerce can tell, by street boundaries, where the high and upper-middle rental areas are. Concentrate on the \$60 per month and up areas. If the chamber doesn't have this information, the local newspaper no doubt will. Thus, armed with a street map and a city directory or an automobile registration directory, you will be able to learn where the group lives from which it has been estimated that 62 percent of the personal plane sales will originate.

Through a good, live, consistently followed-up mail, phone, and personal call solicitation—proven and efficient means of finding prospects—it is possible to sell this I percent economically. It is in this phase of aircraft distribution that many automobile distribution that many automobile distributors and dealers will be successful, where there will be failure on the part of those who have made flying and not merchandising their chief activity

This is a subject on which volumes could be written, but in any event sound advice can be had from successful merchandisers in other well established lines of high-unit-value items.

Meantime, we present (on page 123) a tried and proven sales solicitation program which, if followed diligently, will produce good results.

This solicitation program uses direct mail advertising. Well-prepared mailing pieces can be of the greatest help in softening up your prospects, in getting your message over to those in a select group, and in preparing them for your personal contact, if not actually selling your product. Although many business men consider direct mail an inexpensive means of advertising, they too often believe it ineffective. All too typical is this remark: "Here it's February and a tough



Used in machine shops and tool rooms for finishing intricate dies. Used on production lines to clean castings, turnings and forgings . . . sharpen tools and do hundreds of grinding, finishing, polishing, burring, routing and etching operations.

Dremel Moto-Tool has AC-DC motor with shock-proof bakelite housing, oil-sealed (oil-less) bearings, and built in cooling fan. Weighs only 13 ounces—so light and compact a girl can handle it with ease. Dynamically balanced armature eliminates vibration and provides precision control. Moto-Tool's high speed (27,000 rpm) permits finer, faster work—conserves cutters.

Dremel Moto-Tools are proving indispensable aids in speeding up war production in such plants as General Electric, Westinghouse, Remington Arms, Ford, Nash-Kelvinator, Consolidated Aircraft, Douglas and Northrup Aircraft, and many similar "Arsenals of Democracy."

Try a Dremel Moto-Tool on your own jobs—in your own shop. See how versatile, how indispensable it is—how it saves time and materials. Order from your distributor or contact a Dremel Representative. PROMPT SHIPMENT on orders with proper priority.

Federated Sales 2437 W. Valley, Alhombra, Calif.

Mill Factor Products
53 W. Broadway, New York, N. Y.

F. W. Fowler 137 Federal, Boston 10, Mass.

J. J. Bocker 2321 Second Ave., Seattle, Wash.

Whether you have a Moto-Tool or any other type of grinder, use only genuine Dremel shop-tested Accessories—steel cutters, emery wheel points, brushes, sanders



mouth for sales, so we'll keep expenses and other media, the greatest care is down and use direct mail, since we must have some mailing lists around here we can use." And all too often an old list is found and a mailing sent out that is not very carefully prepared. Then when no results are obtained, the sales manager complains that "we mailed 450 of those lousy things and didn't get one single answer.". This is really not a condenmation of direct mail, but rather of this particular sales manager's conception of direct mail

In handling newspaper ads, radio amouncements on gazn e ads posters

You can now order your set of the famous Ellstrom CHROMIUM

PLATED Gage Blocks and we can

promise you reasonable delivery.

Our stepped up delivery schedule applies to either "Working", "In-

spection" or "Laboratory" sets. Just

drop us a note asking for precise

Elistrom Chro-

mium Plated Gage

Blocks offered indi-

vidually or in complete sats in three

classes. WORKING

Sets with guaranteed

tolerance of = .000008* INSPECTION Sets

with guaranteed

tolerance = 000004°

LABORATORY Sets

with guaranteed tol-

grangs of ±,000002".

generally shown and usually professional advice obtained, but for direct mail the job is too frequently merely given to some employee, very often accompanied with no more thought than: "Charlie, get up a letter to mail out this month and stir up some business." Charlie may be a clerk, a bookkeeper, or a salesman, but not necessarily an authority on advertising. To eliminate these evils, this procedure is suggested.

First select your list of prospects, making certain they can reasonably be considered prospects and that they live

Yes, all Ellstrom-made Gages are CHROMIUM PLATED to give

them very superior wearing qualities. These gage blocks by actual test

wear many times longer. It's the

finest gage block that money can

buy . . . and solidly backed by a

family tradition of fine precision

OW... REASONABLE DELIVERIES

ON ALL ELLSTROM GAGE BLOCK SETS

gage making.

in a radius that could practically be considered your 'castonicr area." Next, give careful thought to the type or types of mailings to be sent

Mailings should not be made to hot prospects. These people should, of course, have immediate personal calls, Others perhaps should be called "suspects" and mailings should be tailored to fit the various types. To the old account, try an offer of a free service -say, free installation of some accessory on which you have a high gross profit, or a gift of a merchandising item such as a chart holder, in short something to entice him to again becorie an active customer. Likewise letters to other types of prospects should be carefully drafted, personalized, and well-groomed before being sent out. To executives of local companies, for instance, try a letter which invites them to take a free flying lesson, setting up a choice of two dates but asking them to call if neither of the dates is convenient, so they can set their own time

There are many ways of suggesting action, and if there is no one in your organization who knows from expericace bow to frame such personalized, action-getting letters, seek competent professional advice and help. In many cases this may be available from the manufacturers of the line of planes you decide to sell.

One kind of prospect would be sent several mailings progessively for what is called building a customer—selling your product, This entails more money being spent on postage and mailings. Another kind of prospect would be the more carefully chosen ment or won an who should be sent one or two mailings, in each case with a personal call follow-up. Remember, though, to limit the mailings to the number of customers you and your sale-men can contact,

It should also be borne in mind that this program is built around classifying prospects, telling where to find their names and addresses, what and when to mail, how to keep your records, who to call on and when.

It should not, however, be considered your entire advertising program. Rather it should be a complement to all the other advertising done, such as that in newspapers, signs win ow displays, etc. It is a plan which, while effective in itself, will help make all your other efforts more productive.

Now consider the third major question: "How much of an organization is needed to do a well rounded, profitable job?"

First make up a budget. This is a vitally important cog in the merchandiser's wheel of success. An estimate of your sales volume reduced to your

gross profit less your expenses will in an bisacss be the amount of norcy you will make. The accompanying illustration gives an outline for a suggested budget, with each major overhead item listed. These must be adjusted to fit the problems of your location and market, using the percentage of gross profit on the lines of planes you expect to have for sale.

Starting with the business you estimate you will be able to do after analyzing the potential, as previously suggested, fill in the statement. You may have to change your first estimates and expenses when you get down to that final item, "net operating profit"!

The fourth and last major problem with which to wrestle is: "How much of a showroom; and should it be downtown or at the airport?"

From a theorist's point of view, downtown is the logical and only answer. But this is the sort of problem we can help solve by a careful look at the answers to other questions. We have a fair estimate of the number of planes that will be sold in the territory and a reasonable approximation of how many of those sales can be taken from competitors.


If that figure, when applied to the budget, will permit an amount under rent for a good, downtown location, it would seem advisable to include this in immediate postwar plans. If, on the other hand, the budget does not say yes, then don't do it now, but keep alert to increases in sales which will make possible such a move. Whether downtown or at the airport, make adequate provision for a good well-lighted well-decorated showroom. It will prove to be your best sales clincher.

Fix-It School on Wheels

(Continued from page 154)

tract by the aircraft companies and some by AAF personnel. Actual working parts of the latest models of aircraft are cut away and mounted for instructional display. Virtually all of the mockups are operative, enabling phots and service mechanics to see at a glance just what takes place in a system or piece of equipment while an airplane is in flight. Batteries or generators are used to supply the motive power.

Much ingenuity and care has been shown in the creation of the mockups, and further, they are constantly being changed by the MTU instructors as new equipment and techniques are developed. For example, if the manufacturer adds a new carburetor to the engines for a B-17, the flight engineer and ground crew must learn its operating principles and how to re-

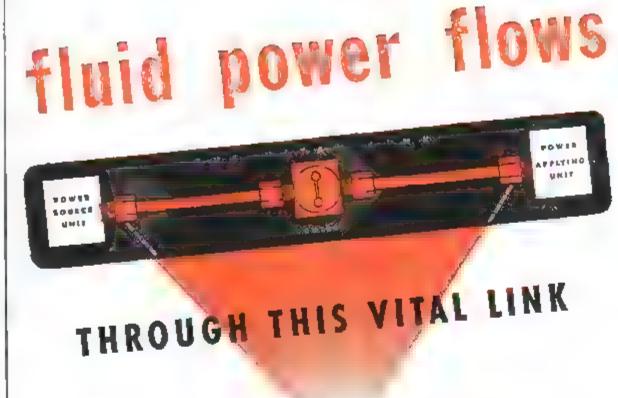

ngineered by PARKER

THE PARKER COUPLING

is the key to the vital link, englneered and designed by Parkerprotected against leakage and vibration, precision-made, quick to install, quick to service.

A. A. F. SURPLUS WAR STOCKS

Parker has been selected by Metals Reserve Company to market surplus A. A. F. war stocks of valves and fittings. Immediate delivery assured. For specifications and installation recommendations, write, wire or

PARKER SERVICE AGENCY

Agent for METALS RESERVE COMPANY

Division of THE PARKER APPUANCE CO.

Fluid Power, the modern way to get things done, is carried wherever you want it to go through tubes, and controlled by valves.

You think of Fluid Power as a three-link chain; Source-Circuit-Utilization.

The key link is the Circuit—straight line, around corners, into tight places, under direct or remote control. That key link is vital, for the successful operation of any Fluid Power application depends on it!

It's Parker's business to engineer this vital link-to design it, build it, install itto build the precision valves and fittings that make it function, and the tools to handle them. We've been at it for twenty

Fluid Power Engineering is a young science, based on the old familiar principles of hydraulics. War has intensified its uses-multiplied the number of jobs it can do.


Whatever kind of equipment you operate or build, or plan to build, chances are Fluid Power will make it work better, or cut its cost, or increase its usefulness.

A Parker Fluid Power engineer will gladly discuss these interesting ideas with you. Write to The Parker Appliance Company, 17325 Euclid Avenue, Cleveland 12, Ohio.



ers of Chromium Flated Yage Blocks

DEARBORN GAGE CO. 22035 BEECH STREET

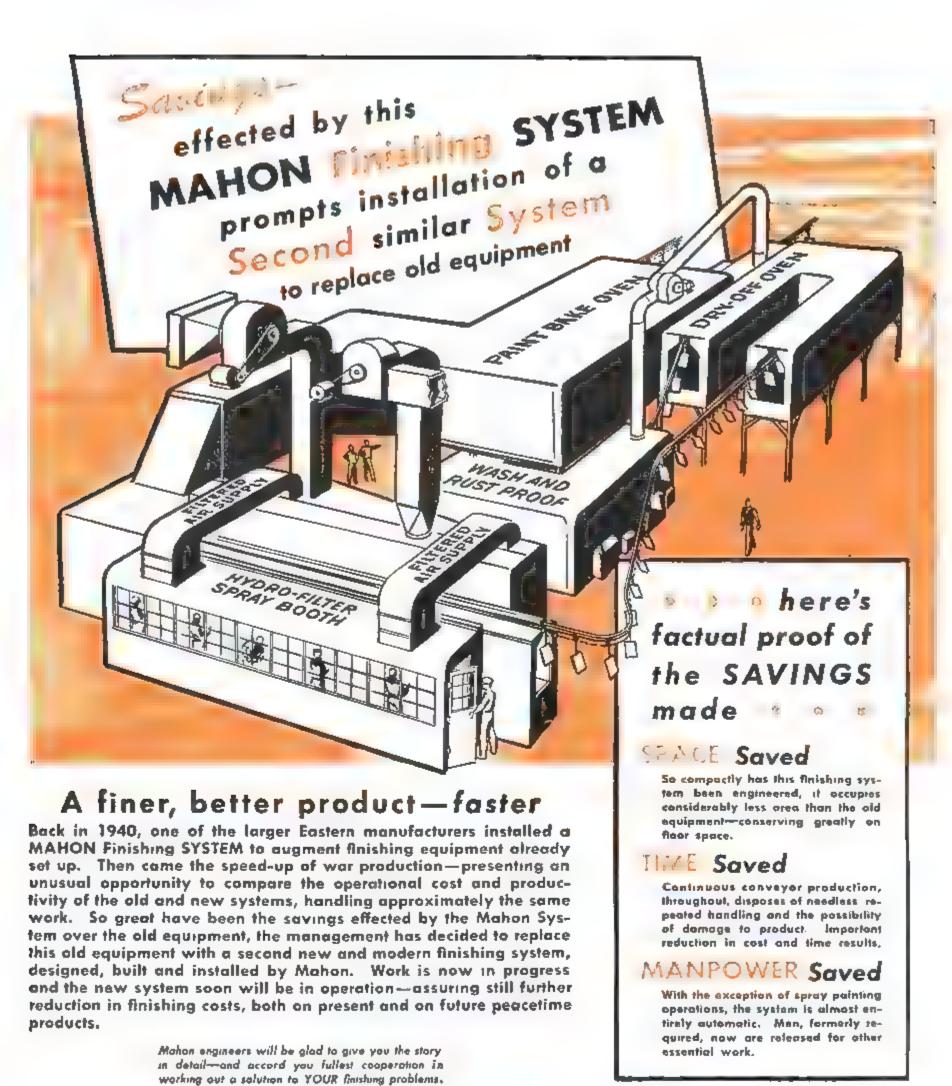

THE R. G. CHICAGO 4-

Mondocturers of Motel Cleaning Machines (Rust Proofing Machines) Hydro-Filter Spray Souths (Ovens of All Types) Filtered Air Supe Inly Units . Hydro-Foom Dust Collectors—and Many Other Units of Special Production Equipment—including Complete Finishing Systems pair t therefore, a mockup is made of the carburetor installation, and it is me reporated in the equipment of the B 17 hobite training units.

The trockups are ideal training de-Yes. In the hydraulic display, pilots and ground crew can see the action that steers the nose wheel and learn why careful snubber servicing is inportant to prevent shimmying or fail ure when landing or taking off. They larm correct maintenance to insure perfect operation of landing gear and cowl flaps, how brake efficiency deper is upon proper clearances and per feet operation of de boosters, also why sufficient a r pressure must be man timed in the hydraulic accumulator and what happens if a leak develops and how to take care of it,

In the propeller mockup is a full size proposith blades clipped, and a curriway view of the hub and governor. Oil supply is shown in transparent plastic times and pipelines. The instructor demonstrates how the hydrachic system functions to control peopel or pitch during normal flight. I know see he instructs pilots regarding the equipment that feathers the propeller.

Figure specialists among the ground crews can study another mockup which shows the actual flow of fuel from time arrent tanks through transparent pipes to the strainer, booster puripifical all shut-off valve, engine driven puriping and finally into the carbureter

On the electrical display panel are the switches and operating gages of the plane; also, the landing gear warning system emergency alarm bell warning for bading out, and electrical fire warnings of flames in an engine or compartment

Another mockup shows fire exting a sheet in engines and compartments, with and stabilizer units, and mose heaters. All displays have a threefold map see. To teach enuipment operating principles, to explain naintenance, builth criphasize repair short cuts.

One of the primary functions of the units is to combat accidents due to nechanical halfunctions. By teaching all crows the latest technical tricks, many accidents have been prevented, and many planes and their crews saved for action against the enemy.

An outstanding feature of all mobile training units is the flexibility of their distructor program. MTU's go beyond and in a sense, excel—the formal type of classroom instruction, since, save for prelaminary lectures on new equipment, all work done by the students and instructors is practical. Theory is held to a minimum. Little time is lost on phases that are well understood, and emphasis is placed on solving particular problems, and in

LOOK TO
CANNON
DP CONNECTORS
IN 1945

NEW applications of the exclusive Cannon Electric "DP" series of connectors have recently been extended from rack equipment in radio assembly to such uses as special centralized aircraft control on through to signal relay equipment.


Several new "DP" connectors of strikingly new design will be released in 1945—testimony to the progressive engineering Cannon Electric incorporates into its products. Since Cannon Electric pioneered the aircraft electrical connector in 1932, this development process has gone steadily onward. Cannon is prepared to meet the demands of postwar electrical equipment.

Cannon Type DP Connectors cover a variety of rack, panel and bail-type fittings, carrying from eight to 135 circuits with amperage range from 10, 15, 30 and 40 in many varied arrangements, including coaxial contacts.

All these and many other high quality electrical connectors are Cannon designed and manufactured.

For detailed engineering data on Type DP Connectors refer to the Cannon DP Bulletin. Write to Department A-110, Cannon Electric Development Company, 3209 Humboldt Street, Los Angeles 31, California.

HERE ARE A FEW OF THE 'DP' CONNECTORS AVAILABLE NOW— AND MANY NEW DESIGNS ARE COMING





ITPE DP-3



TYPE DP-D



TYPE DP-P10




CANNON ELECTRIC

Connon Electric Development Co., Los Angeles 31, Calif.

Canadian Factory and Engineering Office: Cannon Electric Company, Limited, Toronto



REPRESENTATIVES IN PRINCIPAL CITIES-CONSULT YOUR LOCAL TELEPHONE BOOK

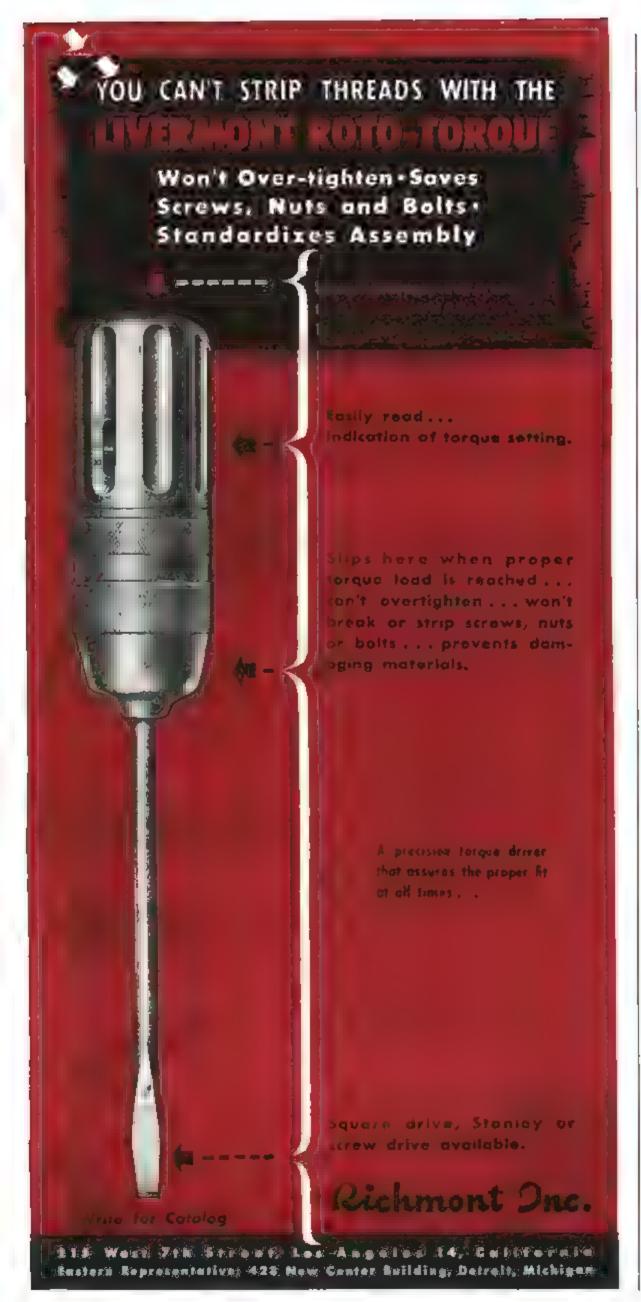

refresher instruction, short-cuts, and trouble shooting

The units generally spend about two weeks at each base. Classes are set up in empty hangars, barns, on the line, or at any convenient place designated. Schedules are planned so as not to interfere with combat missions. The schedules are always directed at the problems of the particular base. Much of the value of the MTU's lies in the information picked up in their travels: if the mechanics at one hase have developed a short-cut solution for some malfunction, this knowledge is passed on by the MTU at the next hase. As a result of the variety of experience gathered by the instructors, many procedures for both operating and servicing techniques have been developed by the unit instructors themselves.

The complement of each MTU varies from 6 to 15 men, according to the type of economic carried. Each unit has an officer in charge who mai itams the instructional program, handles arrangements for housing and messing and other necessities of the men, and takes care of reports and ha son with the base training officer. Some of the crows include a civilian factory representative who provides additional help in solving aircraft problems and instructing in latest modifications and short cuts.

There is a story behind the development of these mobile training units. During the vast expansion of our air forces after Pearl Harbor, our AAF trained hundreds of thousands of skilled pilots, hombardiers, avigators, gunners, flight engineers, airplane mechanics, radio operators, and other specialists needed to fly our warplanes and to keep them flying. This job was accomplished at hundreds of flying fields and AAF technical schools throughout the United States.

Shipped overseas with combat squadrons and groups, these men were thoroughly capable of flying and servicing the planes in use at the time of their graduation, but the constant and rapid rate of modifications and changes and improvements in our combat ships presented the problem: How can they be kept in step with technical advances?

This problem had become acute in 1942 when new craft were presenting operational and maintenance difficulties at the bases where they were being flown. The mobile training unit was the answer to this problem.

It was at a conference in Los Angeles that MTU was conceived. In attendance were Maj. Gen Walter R Weaver, retired, formerly commanding general of the old AAF Technical Training Command, and Maj. Gen. John F. Curry, former commanding general of the western division of the command, together with representatives of the Allison Engine Co. and the Lockheed Aircraft Co.

A set-up was initiated which included the use of Fruehauf trailer trucks as a standard unit. The mockups and cutaways of all the important functional parts of the plane were constructed, then other instructional equipment, including schematic drawings, projectors for training films, charts, diagrams, and complete files of technical orders and factory operational directives, were added. "Faculties" were assembled, consisting of handpicked enlisted specialist instructors, seasoned graduates of factory and technical schools of the air forces, with an officer in charge

The first mobile training unit, with mockups of Lockheed P-38 Lightning equipment, began its travels on July 2, 1942. Operating at air bases where P-38 groups were being processed for overseas, it became immediately apparent that the solution to a critical training problem in the AAF had been found. Other units were constructed and equipped for the latest models of fighter, bomber, and cargo planes. Requests poured in from bases all over the country for MTU's. Expansion was rapid as they proved successful.

Steps were then taken to design units capable of having the instructional equipment packed into cargo planes to be flown where needed with its staff of teachers. The first such units were sent to Air Transport Command bases in the then combat-active Aleutians. Later, other units were flown to Laborador, Newfoundland, Iceland, Africa, and Caribbean bases. Still later, when transportation facilities and time permitted, the instructional equipment was packed into the 5-ton trailers and shipped overseas to combat theaters, where they could move from base to base. Today, these mobile training units are in use in every combat zone where American Air Forces are op-

Mobile training units are organized, constructed, and operated by the Army Air Forces Training Command's western technical training division head-quarters at Denver, Colo. The units remain under the control of the Denver headquarters, whether operating within or without the continental limits of the United States. They are placed on temporary duty with the domestic and overseas air forces for a period not in excess of six months.

After six months duty with tactical air forces, the units are brought back to the United States for complete overhauling. Refresher courses for the instructors are given at factories.

After operating in one combat area



In Your Behalf A dependable

Oscillo GRAPH

R. F. O. -5



The HICKOK OSCILLOGRAPH R.F.O.-5 is especially designed for frequency modulated, amplitude modulated, and television service. This is your instrument for COMPLETE VISUAL ANALYSIS.

Self-contained Wide Bahd and Narrow Band F. M. Oscillator, Demodulator, Video Amplifier, Signal Tracer, Visual A.C. Vacuum Tube Voltmeter. It features high sensitivity amplifiers, returns trace eliminator, calibrated screen, variable width frequency modulated oscillator, pilot light and phasing control.

Power supply, 110 to 120 volts, 50-60 cycles. Size, 11"x13"x15%". Finished in baked crackle lacquer. Shipping weight, 55 lbs. Shipped on WPB authorization 3243. Otherwise, orders must be accepted for shipment after WPB restrictions are removed. Advise whether you wish New METER Catalog or New RADIO SERVICE EQUIPMENT Catalog.

THE HICKOK ELECTRICAL INSTRUMENT COMPANY

THE STANDARD OF QUALITY



the units are often sent to entirely different areas after the instructor personnel has been brought up to date and mockups and other teaching equipment is redesigned to represent the last word in modifications and change. The interchange of leas between combat theaters, as accomplished by MTU's, has proved invaluable in spreading knowledge of maintenance and flight procedures

Standardized Maintenance

(Continued from page 137)

planes of the Stearman primary trainer type per month, plus 150 engines. Minor repairs can, of course, be handled in from a few minutes to overnight, and not more than 20 days need be expended for a complete airframe overhaul or more than 12 days on engines. For smaller personal planes this time can be materially reduced,

There is no reason why the personal pilot, arriving at a field in the evening, can't have his plane inspected serviced, and minor repairs or adjustments made in time for departure the ext training

Can fixed base operators survive trying to offer such service? Many are so
sure they can that they are spending
plenty of hand-earned money to support that belief. Our company, for one,
has just purchased Grand Central Airport, one of Southern California's
prominent fields and former terminal
for several major airlines. Improvements include a \$70,000 engine test
stand now being completed, together
with other facilities which can be
adapted from military to peacetime
operations without material changeover

The shops definitely will remain the same size and will offer the same capacity for peacetime operations as they have during the war. Naturally there may have to be some skeletonizing of personnel during the reconversion periods, but it should be remembered that private and non-airline commer cial flying has been prohibited on the West Coast during the war. The build-up should be rapid, however, as witness the fact that since Grand Central was opened to limited private and commercial flying on a point-to-point basis, three charter companies have established themselves there, and a number of personal planes have come

When flying again is freed from wartime restrictions another upsurge is certain. We can sign more than a hundred students for flight training within the first 24 hr, of receiving the green light. The certainty of flight training in secondary schools and jun-





Olofsson craftsmanship is able to help solve production problems requiring precision manufacturing. The organization is comprised of designers and builders of tools, dies, jigs, gages, fixtures and special machines.

TOOL AND DIE COMPANY LANSING,

for colleges will also make certain another boost in business in short order.

This increased business is anticipated with utmost confidence because we will offer fixed base operations comparable to the sales and service offered in the automotive field. We will demonstrate and sell the airplane much as the automobile has been demonstrated and sold so successfully. We will have adequate storage space, as do garages. We will sell fuel and oil and provide adequate repair and maintenal ce service.

Where the garage has a street at its service door, we will have a runway; where the alert automobile service man offers maps and road information, we will have weather data and flight plan assistance

We are ready for a new era of fixed base operations.

Supercharged Harness

(Continued from page 131)

not usually present, there had always been considerable flash-over trouble, but with the higher pressure of the supercharged harness this has been reduced to the equivalent amount experienced at lower altitudes with standard harness.

C & S pilots report they can now operate engines smoothly under any atmospheric conditions, and other airlines using the new harness report smilar success. All airlines which have used C & S supercharged ignition have adopted it as standard at the termination of their tests. It is now standard on Northwest, Delta, National, Eastern, and United, and it is being tested by Pan American, also the Navy on its cargo run from Seattle to

During the past 18 mo., Boeing Aircraft has been conducting a very complete series of experiments with B-17 bombers at high altitudes, and after using many types of harness and ignition this company's reports supercharged ignition harnesses is quite favorable

Net result is that C & S has found itself literally forced into the manufacturing business. Not only have its own shop facilities been fully employed, but it has found it necessary to subcontract many items, which are later assembled at their C & S plant.

With high altitude flight assuming greater and greater importance in long distance air transportation, the necessity for trouble free ignition equipment becomes a ruling factor in design. The proven efficiency of the C & S method of ignition supercharging will undoubtedly contribute much to the operational success of high altitude aircraft



S.S. TUBING

First bomber to have pressurized cabins, the famous B-29 Superfortress uses Rex-Flex stainless steel tubing in providing supercharged safety for its crew at extreme altitudes.

Boeing engineers began planning years ago to make the B-29 the finest bomber in the world. Every square inch of the huge Superfort's design was carefully scrutinized-each component part, however small, was selected with exacting care.

Boeing engineers knew that the success of the B-29's pressurized cabin would depend upon its ducting system. That system had to be right. It had to be safe-non-collapsible, highly resistant to crushing, in order to stand the unbalanced pressures above 30,000 feet. That is why Rex-Flex stainless steel tubing—a product as truly modern as the B-29 itself-was chosen for the job.

Rex-Flex not only has unusual durability but is manually bendable in multiple planes to facilitate installation-can be assembled right on the job by any worker-and when once installed is the safest tubing for long, leakproof, fireproof performance. Here is a summary of the reasons why Rex-Flex is the flexible tubing for your job:

 High vibration quality Non-collapsible • Fireproof

· High crush strongth · Low line loss

· Bandable in multiple planes

Light weight

Rex-Flex was especially designed to meet aviation's need for a stronger, safer flexible metal tubing - now and in the future. Let us show you how Rex-Flex can help in combating corrosion or vibration in your present or postwar products. Write us today for the complete story.

Flexible Metal Hose for Every Industrial Use

· Air tight

MAYWOOD, ILLINOIS

Plants: Maywood and Elgin, Ill.

More Seats Up . . .

(Continued from page 135)

or the scales while passing the will either from sewing machine or from stock to finish bench.

It will be seen that the total time lost in movement of the work has been reduced to about as small an amount as would seem practicable in a plant where the paintities are so small-frequently comprising single pieces and soldom exceeding enough for one or

time, and with the same equipment as formerly, a greatly increased output may be obtained, merely by planning the routing with a view to eliminating lost motion and interference through crossing paths during the production

Service Prospectus

(Continued from page 134)

these men will be divided into three This shop layout is of particular in- categories in the domestic and foreign terest in that it demonstrates how, with sphere: 1. Assistance to airlines; 2

.o . icrease in personnel or working assistance to the military forces; and 3. assistance to authorized stations and hence to the private owner.

Operational assistance to new airlines in establishing their shops, designing maintenance operations, and in determining maintenance schedules will be a typical service offered by the held engineering operation.

In addition, company field service men will be assigned to each district sales office and will work throughout the territory encompassed by the district. It will be the responsibility of these men to investigate troubles, assist authorized repair stations, and to work with the various airline maintenance organizations.

Service Training

The problem of training personnel for the maintenance of new aircraft is increasing in importance to the degree that it is now an essential phase of any service program. This is par ticularly true in regard to training on the larger transports now being produced or developed

One objective of the company's training organization will be to develop courses of instruction, visual aids, and data through instruction of company personnel, and then to make available to the customer the same instruction for customer personnel This may be accomplished by having the customer's personnel take training at the factory, or by having instructors from the customer's personnel take the training and later establish courses at their own operating bases. In any case, the Lockheed training school will assist in specialized 'or generalized courses of instruction to give most efficient utilization of new aircraft immediately after the purchase.

A second function of the school will be to train representatives from authorized repair stations in methods and procedures used in service and repair of the company's aircraft. Military training will continue to be given to whatever degree is determined by military requirements.

Administration

The administrative phase of the service organization will include the contracts, finance and accounting, material, scheduling, and all, of the valued functions entering into a normal administrative activity.

It is worthy of note, however, that the finance, accounting, material, and shop order systems in the service shops are being developed to permit their installation by any authorized repair agency not now employing a satisfac-

Time studies, estimating data, and time of performance information ac-

cumulated over a period of several years' operation will be charted for the use of repair agencies working on Lockheed airplanes in order that a standard basis of time for accomplishment of work may be available to the

The sketch-book planning outlined herein may be used in part, in whole, or in a completely revised form. The functions outlined will probably require manifestation in some form or another, and are therefore a good basis for individual consideration.

It would be unwise indeed, in these days of changing policies, new designs, and uncertainty of course to be followed, to attempt a "fix" on a postwar service plan. But it would be even more unwise to have no plan at all, and the foregoing briefly outlines at least one plan sufficiently flexible to enable a shift in almost any direction prompted by general aviation developments.

Attaining Bearing Cleanliness

(Continued from page 140)

it exceed 0.1 percent. This alkali content is usually automatically maintained by "carry over" from the cleaner solution. A simple means of checking this content is to observe parts being rinsed. If parts dry with traces of light rust, the alkalı content is too low; if they dry with noticeable powdery residues, alkali content is too high

13. Runse parts immediately after reasonable drainage of cleaner from surfaces. Do not permit cleaner to dry on parts because this makes adequate rinsing more difficult.

14. Immediately dry parts with blasts of prepared compressed air or by placing in an oven, as specified in the discussion on drying


15. Apply the proper corrosion preventive, as soon as possible, to thoroughly dried parts. A thin temporary preservative should be applied on bearings before inspection.

Emulsion Spray Cleaning

Emulsions containing soluble oil can be used in the same way as alkaline cleaners. Be sure to study the particular methods of mixing given by the manufacturer of the oil used in the emulsion. The emulsions will only work with certain types of dirt, and should not be expected to act as a cure-all for all contaminants.

Certain precautions should be followed in the employment of these

1. Use emulsion spray cleaning only on individual rings, balls, or retainers, and not on assemblies because of diffi-

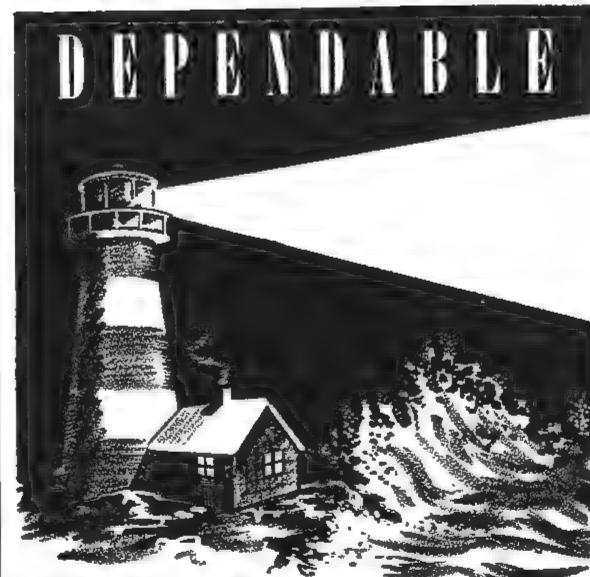

CLARK ELECTRIC TOO

No previous use or abuse has tested the dependability of drills, grinders and sanders as has the quickened tempo of modern war production.

The record of Clark Tools is an achievement. Hour-after-hour performance . . . even beyond their expectant useful life . . . has been the experience of those who have used these tools.

When you buy a Clark Electric Tool, you are purchasing dependable performance.





drills • grinders • sanders



IAS. CLARK, JR. ELECTRIC CO. 612 BERGMAN ST., LOUISVILLE, KY.

MARYEY HLLINOIS DETROITS: MICRIGAN

cymnain- Gordon

Aluminum Forgings all

the way up to 8'6" pro-

peller blade. The develop-

ment of Aluminum Forg-

ings by Wyman-Gordon

for the war will give to

post-war industry new

production impetus

through less weight plus

forging strength.

Reduce Handling Costs Speed Production



Illustrated above is an application of a Curtis Air Hoist used to off-bear concrete blocks. In hundreds of other uses, for any lifting operation, Curtis "One-Man" or "One-Woman" -Air Powered Hoists provide faster, more accurate lifting, they release men for other jobs, reduce worker fatigue, and save time and money

Having less dead weight than other types of power hoists. Curtis Air Hoists permit light supports and easier moving of trolley mounted models. They are immune to over-loads and can be operated by any man or woman in your plant. Faster, yet little more expensive than a chain block

Curtis Air Hoists are available in capacities up to 10 tons pendant or bracketed types. For suggestions as to how Curtis Air Hoists can speed up your production and lower your handling costs, write for full information and for free, handy booklet, "How Air Is Being Used in Your Industry."



CURTIS ST. LOUIS NEW YORK SAN FRANCISCO PORTLAND

CURTIS PNEUMATIC MACHINERY DIVISION of Curtis Manufacturing Company 1957 Kienlen Avenue, St. Louis 20. Missouri

> Please send me book et, How Air Is Being Used in Your Industry

Firm

Street

culty of properly drying the assembly.

2. Do not handle parts with bare hands during and after cleaning and preservation.

3. Use the emulsion at temperatures which will not cause "breaking" of the emulsion or deterioration of surface active agents. The temperature recommendations of the manufacturer should be used. Temperatures between 150 and 180 deg. F. are usually satisfac

4. Emulsion cleaners should be made up and controlled according to the manufacturers' recommendations which will usually be from 1-10 percent emulsion solvent in water, depending on nature and amount of contamination to be removed.

5. The emulsion tank should be dumped and refilled with fresh emulsion whenever cleaning becomes unsatistactory

6. The spray pressure should be sufficiently strong, and nozzles so placed and directed, that all surfaces of parts are reached.

7. The emulsion recirculating system should be equipped with filters. which should be cleaned daily.

8. Inspect machines at least weekly to see that nozzles are properly directed and not clogged.

9. If conveyor cleaning equipment is used, place parts in a position to permit sprayed emulsion to reach all sur-

10. Dry (as specified in item 14 under "Alkaline Cleaning Solutions").

11. Apply proper corrosion preventive (as specified in item 15 under "Alkalme Cleaning Solutions").

Emulsion Sook Cleaning

Emulsion soak cleaning is sometimes used as a preliminary to solvent cleaning. Such solutions are prepared for the purpose of removing materials insoluble in solvent but soluble in water solutions such as perspiration Ordinarily, bearings or other parts would be immersed in a tank of soluble oil solution and allowed to soak for a period of 10-15 min.

1. When cleaning is by manual means, agitation and brushing will speed and improve the operation.

2. After proper soaking period, remove parts from tank and drain all excess solution back into tank. This will usually require not more than 30

3. Hang the parts in, or pass them through, a cold water spray, until all emulsifiable solvent is flushed away It will be sufficiently removed when there is no further milky mixture on the surface of the part.

4. Immediately transfer parts to a hot water rinse for 30-60 sec. After removal from this rinse, water-breaking (uneven and discontinuous flow

from surfaces) will be noticed. In this case it is not an indication that parts are not clean but that there is a trace-film of solvent and emulsifier left on the surface.

5. Drain or shake off excess rinsewater.

6. Immediately dry parts (as previously specified).

7. Apply the proper corrosion preventive (as previously specified).

Petroleum Solvent Cleaning

Petroleum solvent cleaning is one of the most common methods applied to bearings. The solvent should be a neutral water-white petroleum distillate. The most common has a minimum flash point of 105 deg. F, and is sold as Stoddard's solvent or dry cleaner's naphtha as covered by Federal specification PS-661. Alternate solvents, such as kerosene, gasoline, and light petroleum oils, can be used when this material is not available.

These petroleum solvents dissolve oil on the bearings, and leave a slight oily residue along with insoluble particles on the surfaces.

The simplest method of application is with a tank in which bearings are allowed to soak and from which they are later removed, if necessary, with agitation or brushing. They are then rinsed in a tank of clean solvent, allowed to drain, and surplus solvent blown off with clean dry air. A sprayer system of washing and rinsing can be used in the same way as described for emulsion spray cleaning.

Further factors, methods, and applicable precautions in solvent clean-

1. This procedure is particularly adaptable for cleaning by hand in small tanks

2. When automatic conveyor appli cations are made, agitation of the solvent should be provided to aid clean-

3. Wear oil-resisting synthetic rubber gloves or use suitable hand-protective cream when handling parts during and after cleaning, to protect hands from inflammation or derinatosis, and parts from perspiration. After drying, parts should not be handled with bare hands.

4. Handle parts on hooks, racks, or in baskets suitable for satisfactory solvent application and adequate drainage.

5. Handle solvents in safety tanks and provide fire extinguishers, since solvents are inflammable.

6. Provide tight fitting metal covers for tanks, and keep covers in place when solvents are not in use, to minimize evaporation and contamination.

7. Use solvent at room temperature.

8. Check solvent for dirt.

9. Replace solvent when contami-

because of Harris COMPRESSED RUBBER BEARINGS Jeeps are the "toughtes" of all U.S. transportation units because most of their mileage is piled up on the rough, shell-scarred battlefields. They take a terrific amount of rough going but much of that is being smoothed out by Harris compressed rubber bearings for shock absorbers. These Harris bearings permit freedom of motion in all directions, eliminating squeaks and rattles and prolonging the life of the shock absorbers. Regardless of which way the Jeep longes, backward, forward, or sideways, the Harris rubber bearings help to control and cushion the motions in all directions, adding considerably to the stability, control, and operation of the car. Harris Products Company are the originators of Torflet bearings, vibration eliminators; mountings, flexible couplings, and other vibration eliminator units. The same creative engineering skill, experience and unsurpassed manufacturing facilities that produce these units will be available to industry at large when peace is declared Specialized Rubber Engineer and Sale Manufacturers of Duffer VIBRATION IN-SULATORS (MOUNTS) Torfler BEARINGS Porflet COUPLINGS HARRIS COMPRESSED PRODUCTS COMPANY RUBBER BEARINGS CLEVELAND DA TO HEO TUS A

nation causes in satisfactory cleaning or reaches 2 percent of solvent volume Dirty petroleum solvent may be reclaimed by distillation and re-used. For reclamation of small quantities, simple equipment such as a dry cleaners' still is satisfactory. Bigger stills are available for large reclamation

10. The dirt content may be determined by evaporation of a predetermined amount until only oily or solid residues remain and then weighing or measuring the residues.

- 11. The solvent from the second (rinsing) tank should be transferred to the first (cleaning) tank whenever the solvent in the first is removed because of high dirt content, and the second tank is then made up with clean
- 12. In transferring parts, drain as thoroughly as possible to avoid carrying dirty solvent from cleaning tank to the rinse tank. This permits more' ble decomposition of solvent. effective cleaning with the second sol-
- 13. Clean parts by immersion or spraying in petroleum solvent. Cleaning periods should be sufficiently long to insure complete removal of contammants but never less than 1 min

14. Brush or scrub parts when necessary to aid and speed cleaning

- 15. For tank cleaning, immerse parts in a second tank of clean petroleum solvent (agitate if possible) for at least 1 min. This tank of clean solvent should be used to remove only the film of contaminated solvent remaining after immersion in first tank. All solid or only contamination, as such, should have been removed in first solvent
- 16. After cleaning and rinsing, allow bearings to drain thoroughly, and blow off excess liquid with clean, dry, compressed air
- 17. Apply proper corrosion preventive (as previously specified).

Vapor-Degreasing Solutions

Chlorinated hydrocarbons are used in vapor-degreasing equipment. These solvents readily dissolve oils, waxes, fats, etc. from contaminated surfaces. However, some mechanical force, such as spraying, agitation, etc., must be incorporated in the equipment to remove dirt, metal chips, and other particles which might otherwise remain on the surface of bearings or parts

Do not clean damp or wet parts in a vapor-degreasing machine, because moisture might decompose the solvent to form hydrochloric acid and cause corrosion

In the purchase of the solvents, be particularly careful that the inhibited perchlorethylene, trichlorethylene, etc., which you obtain have been guaranteed by the manufacturer or meet gov-

O B31a, under which they were pur-

The ordinary method is to dip the parts in the solvent, then rinse and dry in the vapor-phase of the degreasing machine. Best cleaning results are obtained by dipping and washing bearings in the solvent, using a hose to properly force solvent through all parts of the bearings, then rinsing and drying in the vapor-phase of the degreasing machine.

The better the equipment, the better will be the result when using these solvents.

Some precautions to be tollowed:

- 1. In order to cause sufficient condensation of the solvent for satisfactory cleaning, parts should be as near as possible to room temperature when placed in the degreaser. Parts should be free from moisture to prevent possi-
- 2. During processing, handle parts on hooks, racks, or in baskets suitable for satisfactory solvent application and adequate drainage.
- 3. Parts should not be handled with bare hands during and after cleaning and preservation. Handling should be kept to a minimum.
- 4. The solvents used should be specifically manufactured for vapor-degreasing, and sufficiently purified and properly inhibited to prevent corrosion during or after cleaning. Use tradename or guaranteed solvents only
- 5. Maintain sufficient solvent content in the boiling chamber, to cover the heating coils.
- 6. Vapor degreasers should be equipped with automatic controls for maintaining proper heat input to boil the solvent, and for shutting off heat when the vapor-phase rises above condensing coils.
- 7 Flow of water through condensing coils, as well as heat input, should be regulated to keep surface of vaporphase below the level of the condensing coils.
- 8 After the degreaser has been shut down for any period of time, water may condense on the solvent surface This water should be removed by skintming before equipment is started. Immediately test for acid content
- 9 When the machine is to be shut down, the heat should first be turned off. Water or cooling medium for the condensing coils should be shut off after the solvent ceases to boil. Do not run cooling coils too long, to avoid condensation of room moisture,
- 10. At least daily, check the solvent in the boiling chamber for dirt content and solvent vapor for free acid. The free acid control is extremely important because small amounts of free

ermient specification AN I-37 or AN- acid will actually corrode any part cleaned in the machine.

11. Free acid in the degreaser may be detected by an acrid odor in or near the machine. Chemical checks should be made to detect approach to an acid condition, and corrective measures should be applied before free acid is actually formed. A quick and simple check is to vigorously shake several e.c. of solvent (condensed from the vapor-phase) and distilled water with a few drops of phenolphthalein indicator. If the indicator is pink, the mixture is alkaline; if indicator becomes colorless, acid is present

However, a more satisfactory check is to condense a sample of the vaporphase until 100 c.c. of liquid is ob tained. Add 100 c.c. of distilled water and 4-6 drops of methyl orange indicator. Repeatedly add small quantities of 0.1 normal standard acid, and shake vigorously with each addition until the indicator changes from yellow to orange or red, and remains so on shak ing for 30 sec. If the total quantify of standard testing acid added to obtain this color change is 2 c.c. or less, then an acid condition in the solvent is being approached. Corrective measures should be taken immeliately

12. If free acid is detected by chemical check or by acrid odor, immediately correct trouble before cleaning any other part. The trouble may be cor rected by addition of inhibitor or alkali recommended by the degreasing solvent supplier, or by cleaning the tank and replacing with new solvent.

13. When using or cleaning degreaser tanks and equipment, exercise extreme care not to breathe the toxic solvent vapors.

14 If degreaser equipment is an open tank, cover when not in use.

15. Before removing parts from the vapor-phase of the degreaser, drain trapped solvents

16. Permit solvent to completely evaporate from surfaces of parts before further treatment

17 Apply proper corrosion preventive (as previously specified).

Finger Print Neutralizer

Steel parts when touched by bare hands, often become coated with acids or salts contained in perspiration.

A large refrigerator manufacturer has run numerous tests on the effects of perspiration and the results have been made available to the Army.

Two corrosion test panels were prepared simultaneously by cleaning. sandblasting, and handling with clean gloves or forceps. One was contaminated with one drop of synthetic fingerprint solution and dried in an air blast at 250 deg. F. Both panels were immersed in hot petrolatum so that a

AVIVIION, December, 1944

coating of approximately 1/16 in, was obtained, cooled to room temperature. placed in the same humidity cabinet maintained at 100 deg. F. and 100 percent humidity, and observed at regular intervals until signs of rust appeared. It was noted that the contaminated panel corroded before the clean panel.

Similar sets of two panels were prepared, with one panel of each set contaminated with synthetic fingerprint solution. After drying, both panels were coated with rust-preventive compound, exposed to humidity, and observed as before. It was indicated that fingerprint stains are not neutralized or removed but continue to react under the rust-preventive coating and decrease the protective life of the compound. This leads to the conclusion that the best preservative applied over a dirty surface is practically worth-

Tests were then run to determine whether ordinary cleaning materials would remove perspiration effects. Immersion cleaning of one clean and one contaminated panel with Stoddard's solvent preliminary to the application of 100 percent petrolatum and humidity testing indicates that the fingerprint shows up readily during the test.

Similar panels cleaned by vapordegreasing with trichlorethylene showed no effect on fingerprints.

With both panels cleaned using 6 percent soluble oil solution, no fingerprint appeared, indicating that this water solution counteracts fingerprint effects. Alkaline water solutions also neutralize or remove fingerprints.

In order to overcome the fingerprint effect, second washing and rinsing solutions were tested to follow the petroleum solvent or vapor-degreasing operations. Two methods appeared satisfactory—the use of methanol containing 5 percent water for removing fingerprints, and temporary rust-preventive containing 5 percent moisture The use of these materials indicates that petroleum solvents and degreasing liquids do not counteract fingerprints. but alkaline solutions, emulsions, 95 percent methanol, and 95 percent temporary rust-preventive do neutralize fingerprints.

Fingerprint removal has therefore complicated the cleaning picture. In summarizing, it appears that alkaline water solutions or oil emulsions are to be preferred for cleaning of individual bearing parts, such as rings, balls, retainers, etc. This eliminates any contamination caused during early handling by machine operators, or inspectors. The difficulty of using such cleaners arises from the possibility of moisture remaining on the parts Therefore, any equipment using these solutions should contain areas for dry-



Western skill solved a tricky problem in aircraft small parts-making

• It's an airplane carburetor float needle and of course it must work perfectly - nothing less will do. But when it was lapped at assembly with its mating piece, the abrasive action wore a tiny groove at the seating line. Not good in a plane that's miles from its base chopping up Nazi transport - it would have a tendency to stick. But Western engineers worked out an ingenious grinding operation that eliminated the lapping entirely, with smooth finish precision results that met the specification of individual dry-seal vacuum tests - airtight support of a 10" mercury column . . . This kind of skill can be highly valuable to you now, but especially postwar. It is not expensive - get our quotation on your next need.

Western Service is Complete

We manufacture special precision screw machine products to specifications. Machine capacity ranges from "8" to 488" round, with complete equipment for all types of secondary and processing operations, in-cluding precision granding, heat-treating, hardening and pentrating

> Aircraft Products Division Western Automatic Machine Screw Company Elyria, Ohio, U.S.A.

Precision Parts and Assemblies Since 1873

ELECTRICITY

TO MEET AVIATION AND AIRCRAFT INDUSTRY POWER NEEDS


ONAN ELECTRIC GEN-**ERATING PLANTS** provide reliable, economical power for many applications in the aviation industry Available in 65 models including Airborne, lightweight, compact types. Powered by Onanbuilt gasoline engines, these electric plants are of compact, single-unit design. Built for heavy duty service, sta tionary or mobile

Successfully used by Pan American Airways—Northwest Airlines—Western Airsines—U S. Army Air Forces—Air Transport Command—Royal Canadian Air Force

D. W. ONAN & SONS 3127 ROYALSTON AVE.

MINNEAPOLIS 5, MINN





350 to 35,000 WATTS

Models rai ge form 350 to 35 000 watts. A C types from 115 to 660 voits, 50, 80 cycles single or three-phase 500 and 800 cycle single phase also special triquencies. D.C. types range from 6 to 4000 voits. Dual voltage

Supply power for starter energizing radio havigation . battery charging Con miunications caba bed electric a repair out. arcra)!

types available. Write for engineering assistance or detailed literature

urport and general lighting accord many other application

Model shown to from QTC fight-weight series

ing and the application of a temporary rust preventive This would allow parts to be in the ordinary factory or assembly department for a period not to exceed two weeks before danger of rusting arises. When assembled parts or individual pieces are cleaned using either petrol-

eum solvent or vapor degreasing equipment, a second solvent rinsing should be incorporated in the process. This means that the rinse should be done on the dry parts using 95 percent methanol, 95 percent temporary rustpreventive, or some similar oil soluble soap solution which would neutralize fingerprint effects. The bearings or parts should then be dried a second time and coated with a thin temporary rust-preventive compound preliminary to inspection or further handling

After bearings or parts have been cleaned by any of the solutions or solvents mentioned, they must be thoroughly dried to remove all traces of moisture or solvent. In all equipment except vapor degreasers, it is prefer able to blow off excess solvent or so bution with clean, dry and filtered compressed air. If this blow-off does not thoroughly dry the parts, they should be drie'i in an oven or hot air blast Wiping with clean cloth should be done only when it is impracticable to use an air blast or oven

The presence of mosture in corpressed air may be readily detected by permitting the air to blow on a polished metal part at room temperature and observing for condensation Mois ture from traps in airlines should be dumped daily

Moisture ir solvent trapped in bear ing pockets, preliminary to oven dry ing, may cause corrosion during dry ing. Oven temperatures should not exceed 250 deg. F., since higher tem peratures might temper the steel

It is upportant that the cleaning department be coordinated with the unpacking, inspection, and repair depart ment, to keep production in balance Otherwise bearings will accumulate at some step in the process, or part of the equipment will have idle time

As soon as the total quantity of bearings to be processed is fixed, economical lots should then be deter mined-in caning that the sizes of bas kets which can be used in the cleaning equipment should be decided. The same sizes can be used in hand oper ated tanks or elaborate conveyor clean ing systems. In either case, best resuits are obtained when baskets contain not more than two layers of bearings and preferably one layer Perforated metal baskets will last longer than wire mesh baskets but may not give as effic ent results. Shapes and styles of handles will depend upon other equipment

Next step in the layout is to decide upon type of solution to be used and size of cleaning equipment to be installed. Dirty bearings may require several minutes soaking time to loosen dirt, and therefore increase floor space and size of equipment. If bearings are relatively clean, only 1 or 2 min will be required in the washing operation and the same time for runsing and drying Thus, the washing machine size would be estimated from the formula Sq. ft. of cleaner=Area of bearings cleaned per day, divided by Hr. of operation multiplied by 40 for ordinary amount of dirt or multiplied by 10 for durty bearings.

If only a small percentage of bear ings are coated with hardened lubricant, it might be economical to have a special small tank in which to soak them, basing the equipment size on the regular run of bearings.

In one layout, the bearings are unpacked, assorted, and placed in baskets on a roller conveyor at one end of the room. The baskets of bearings are then sent to the cleaning machines, rinsed dried and coated with temporary rust preventive preparatory to inspection.

For small shops, hand-operated tanks and tables are satisfactory for cleaning, rinsing, and applying rust preventive. Baskets of bearings are soaked and slushed in the solution allowed to drain, and moved to the rinse tank, where the procedure is tepeated Then the operator should blow-off or oven-dry the bearings before coating them with temporary rust preventive using a similar tank and drain board

For larger shops, continuous con veyor washing machines are more economical.

If bearings have been touched by bare hands, a dip in methanol or fingerprint neutralizer solution, and drying, should follow the conveyor clean ing and drying operation. In either case, bearings should be coated with this temporary rust preventive prelim inary to inspection.

Many operators prefer the use of vapor-degreasing equipment for cleaning bearings. A review of remarks given previously on the purchase of the solvent, handling of bearings, and care of equipment, would be relevant. Bear mgs are placed in the vapor-phase, where the solvent collects on them When the dirt is loosened, the basket of bearings should be slushed in the liquid or washed off with a nozzle Fin ally, the bearings are returned to the vapor-phase for rinsing, and raised slightly for drying. Again, if bear ings have been touched with bare hands, a dip in methanol or fingerprint neutralizer solution, and drying, should follow the degreasing and cooling

Finally, the temporary rust preventive should be applied.

The necessity for, and use of, a demagnetizer was discussed previously.

As mentioned earlier, dipping, spray washing, and vapor degreasing are not reliable for thoroughly cleaning bearings. Minute solid particles may get caught between the retainers and balls or rolls. When hard particles fall into the ball path they might lock the bearings, causing rejection during inspection or indenting the races to cause early failure.

A bearing washing machine wherein the petroleum solvent is forced through the bearing and tends to remove any hard particles between retainers and halls or rolls, has been developed by the Air Corps, which suggests that it be used just preliminary to inspection The bearings should be cleaned at time of inspection or might have a thin film of solvent to help prevent corrosion during inspection. Bearings that seem to catch or run unevenly during inspection could be rewashed in the machine and reinspected to determine f dirt particles were the cause of the catch

When an inspector questions whether a bearing is properly cleaned he can test its cleanliness as follows

Obtain an evaporating dish (approximately of the same diameter as or larger than, the bearing), a 500 c c Ehrlenmeyer flask fitted with a twohole synthetic rubber stopper and two glass tubes. One tube should be L. shaped and extend through the stopper only a short distance into the flask the other glass tube can be L-shaped and reach nearly to the bottom of the flask. Fill the flask with clean petroleum solvent, or its equivalent.

Proceed by holding the bearing over the evaporating dish, and spin outer ring while inner ring is stationary Your solvent through the bearing into dish using short glass tube. Finally, spin outer ring in dish of solvent Remove bearing and swirl solvent to collect dirt particles in center of dish-The presence of metal particles, scale, or other hard particles indicates that the bearings should be cleaned.

In a doubtful case, the solvent in the dish could be filtered and the paper examined for hard particles. Be sure to filter solvent before re-use, else discard it and obtain clean solvent for each bearing examination

This completes the washing before inspection. The clean bearings or those coated with rust preventive should be moved in baskets, with tongs, or by gloved hands, but never touched by bare hands. If the temporary rustpreventive interferes with inspection, it can be wiped off with a lint-free clean cloth



great as 1016 pounds per 2-inch width was observed during laboratory tests of 2" x 10" strips (0.375" to 0.5" thick) of six different Booth felt types.

Almost any desired combination of qualities ... durability is only one ... are obtainable through the controlled manufacture of Booth "prescription" felts and precision die-cutting into mechanical parts. Read Booth's "Technique of Felt Making."

THE BOOTH FELT COMPANY 482 19th Street Brooklyn, N. Y. 745 Sherman Street Chicago, Ill.

APPLICATION CHART AND SAMPLE KIT... Contains swatches of S.A.E. felt types, with specification tables. Write for it. (No sales follow-up.)



EVERY STEP TAKEN IN Safety!




Gold Medal Safety Platform Ladders

Wide working platform, tool rack at top-rung back, steps know-braced and trust-



Step Ludder

Heavy Duty rung back, step double reinforced with trusted tie rod and knee braces. Sainty spreaders. Sizes 3 to 20.



THE PATENT SCAFFOLDING CO. INC 1550 Dayton St., Chicago 22, Hilnots 3021-12th St., Long Island City I, N. Y. SQUARE D OFFERS CIRCUIT BREAKERS TO MEET "AN" REQUIREMENTS

for aircraft, radio, boats, panels and other equipment requiring control and protection — 5 to 50 amperes — 30 volts D.C.



SWITCH BREAKER Class 9301 · Type B (AN 3160)

Combination TOGGLE SWITCH AND CIRCUIT BREAKER used in Aircraft and other applications on low voltage circuits definitely requiring both switching and protection against short circuit and overload. Available with or without luminous handle tip.

PUSH BREAKER Class 9310 - Type A (AN 3161)

Developed to provide ONLY CIRCUIT PROTECTION on low voltage circuits where switching is not required. Unit can be opened only by reason of short circuit or overload after which it is manually reset to again establish the circuit. The manual reset button, black at top, is provided with a red band to indicate trip in daylight and a luminescent band to indicate trip in darkness.

PUSH-PULL BREAKER Class 9311 - Type A (AN 3161-P)

Provides SWITCHING AND PROTECTION similar to 9301 except that manual "on" and "off" is Push-Pull—not Toggle. Push-Pull tends to protect against accidental or careless operation of vital circuit, yet provides a manual means of operation for service. The manual reset button, black at top, is provided with a red band to indicate trip in daylight and a luminescent band to indicate trip in darkness.

SPECIFICATIONS: AMPERE RATINGS—5, 10, 15, 20, 25, 35, 50 amperes, VOLTAGE—Up to 30 volts D. C. SHORT CIRCUITS—1500 amperes at altitudes up to 40,000 feet. VIBRATION—Withstands frequencies varied from 10 to 55 cycles per second at 1/32" amplitude (1/16" total excursion). SHOCK—Deceleration force of 18 G does not couse malfunctioning, AMBIENT TEMPERATURE RANGE—Thermol: 50° to 135° F.



Square D aviation equip-

ment is exported through

SQUARE D COMPANY

DETROIT . MILWAUKEE

LOS ANGELES

27 ..

Service Snafu

(Continued from page 151)

is exhausted—unsatisfactory reports, manuals, blueprints, technical Orders, photographs, and manufacturers' handbooks. Contacts are made with departments in the local Douglas plants—engineering, service, flight, and manufacturing—and, if necessary and if practicable, with the manufacturer of the part affected.

When the service liaison engineer has completed the article, it is sent, along with the source material, through the checking system. The first stop is the art editor's desk, where the type of illustrations necessary for the clearest presentation of the story are decided upon in conference with the service haison engineer. Usually most of the drawings and photographs to be used have been accumulated during the investigation. The art editor sends the basic material to an illustrations group for making of the finished drawings.

The article is then sent for rewriting to technical writers, who check it against the source material and edit it for clarity, organization, grammatical construction, and completeness. Then it is submitted for technical check to either the editor or another service listson man to make sure that all possible points have been covered. The author of the article then checks it with the technical writer to approve all revisions and to answer any questions.

When the staff is satisfied with the article, it is sent for approval to the customer service, engineering, and experimental departments at the plant which has been building the model affected. Additional copies go to any other Douglas departments concerned with the subject and to local parts manufacturers contacted. All articles on flight technique or on the actual operation of the airplane are referred to the chief pilot and his staff.

When the approval copies have been returned, the service haison engineer incorporates the revisions necessary and checks thoroughly any controversial statements. The technical writers check the insertions or deletions: and when the staff is agreed on all changes the article is ready for publication

During this evolution of the finished story, the art work has been moving through its own cycle of development. While the illustrations are being drawn, the art editor and the writer decide upon the typography to be used on the art. When the original art work is returned, the type is applied, and the drawing, along with reference material, is submitted for staff approval. The service liaison engineer, the technical checker, and the technical writer check each illustration for accu-

racy, completeness, and effectiveness of presentation and note their suggestions and corrections on a routing sheet (such as that shown at the beginning of this article). The corrections are made and the revised illustration is circulated until all the checkers OK it.

When the engraver's proofs are returned, they are routed in the same manner, and the service liaison engineer writes the captions to be used with the illustrations.

At this stage, article and art work have reached completion. Although the system sounds very complicated, it is absolutely essential to prevent errors and maintain the standards established for the magazine. And it is faster than the steps involved might indicate.

Distribution

Of course, no amount of careful investigation, writing, editing, and checking would be of value if the information failed to reach those who need it. Not only does Dauglas Service go to Army. Navy, and Marine personnel, but to all the airlines operating Douglas equipment. A special overseas edition (on lightweight paper where weight is a deciding factor) has also been added

To assist the manufacturers of component parts, circulation to them is being increased and distribution is also being extended to the producers of lubricants and fuels.

Plans for Future

Now with reconversion of wartime models and the attendant problems looming, the staff is prepared to publish complete information on this subject, too, and will attempt to anticipate many of the questions sure to be asked by operators.

As a means of increasing the usefulness of the magazine, it has been decided to reserve certain pages for service information furnished by the manufacturers of component parts of Douglas aircraft. This new feature will appear in the forthcoming Jan. 1945 issue of *Douglas Service*.

Planning Payloads

(Continued from page 186)

sporty and may easily be side stepped. The area of this activity at the flight altitude in this particular case is quite large.

At an average airspeed of 140 knots, and an hourly fuel consumption of 150 gal., our assumed 30-mi track deviation may be represented by 192 lb of tuel

Avigational Errors

It is inconceivable that an avigator, no matter how good, will be able to adhere exactly to his plotted track. In



 At a time when welders need superior equipment,
 Cesco announces a new, improved line of welding helmets,

These newly designed helmets are sturdier and simpler and have many fool-proof features.

Safety engineers give them unqualified approval. Welders who have tested them say they can't be beat for comfort. (That's an "earmark" of all Cesco head and eye safety equipment.)



AVAILABLE


Increased production permits offering these helmets I mmediately. Write today for your copy of CESCO'S
NEW enlorged Weld-





CHICAGO
EYE SHIELD CO.
2321 Warren Boulevard
Chicago 12, Illinois



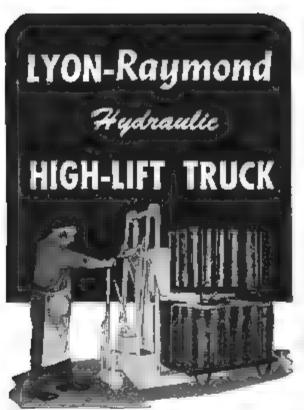

1. TRANSPORTS SKIDS 2. TIERS MATERIALS 3. POSITIONS WORK



light, easily hundled and STRONG.

A FEW of ITS MANY USES:--

- Positions dies for easy, safe handling in and out of presses.
- · Holds stack of sheets at proper height for easy leeding to machine.
- · Adjustable support for overhanging work-at drill presses, shears.
- · Positions work at proper heights for transfer.
- As a work table always at proper height for each workman.
- Places and holds heavy work exactly where needed for machines.
- Loads and unloads motor truck shipments-level loading at truck or platform—transfers at places where overhead systems can t

For the complete details of this adaptable, labor-saving cost-cutting, truck, write today for Bulletin 136. It's free for the caking.

LYON-Raymond Corporation Material Handling Squipment

avigation, first you must determine where you were and then set a compensating course. Avigational accuracy will vary with the seasons and also in various quarters of the globe.

For our purpose here, however, we must assume a reasonable error for a 3,000-mi. trip, and experience indicates that it will be approximately 80 mi. At the previously mentioned airspeed and consumption figure, extra fuel in the amount of 500 lb. would be required. This is only true, of course, where distances and conditions are such that celestial avigation is used.

The chart may illustrate a condition of maximum opportunity for avigational error. Flight through the frontal activity from (A) to (B) would provide the best celestial fix possibilities. However, should the captain decide to descend and proceed through at a level of 3,000 ft., the possibilities of obtaining fixes for the distance (A-B) would be remote. At the lower level, then, dead reckoning would necessarily have to be used for over 1 000 m

Fuel Aboard Not Usable

Payload and reserve curves prepared by the manufacturer rarely include the factor of "fuel aboard not usable." Actually, the amount allotted depends upon how the aircraft is to be flown This fuel should be that amount unavailable when the aircraft is flown in an endurance concition-numinum safe airspeed at minimum altitude or high trum angle. For qualifying purposes in this case we will set aside 30 gal or 180 lb. For weight accounting purposes this is usually allotted to the basic weight of the aircraft.

A clearance at 8,000 ft. for 3,000 m this put you over the top the entire distance: more often not, however If not, the avigator may require several climbs for the purpose of taking a sight. A prudent allotment would be a fuel allowance for two climbs trom 8,000 to 12,000 ft. or approximately 125 lb. of fuel. This amount is over and above that required in level

During flight tests for speed-power determination, movement aboard the aircraft is held to a minimum. In scheduled operations on commercial aircraft of a size that might fly 3,000 na passenger movement must be expected. This movement will be reflected in airspeed loss for a given hp by loading the automatic pilot (which is energy-consuming), or if the ship is trinimed on the automatic pilot at all times, will be reflected by extra elevator or tab drag Let us evaluate a 2-knot loss in airspeed over the entire distance at the average hp This, then would require approximately 165 lb more fuel

In these days of long-range flight planning, each operator should set his own standards of aircraft comparisons. Basic performance information should be requested from the manufacturer and then methodically reworked into practical operating data. Only by this method may reliable comparisons be

More so than ever before, it is realized that conscientiousness on the part of the captain and ability supplied by a flight engineer comprise a most valuable economic asset enroute. A successful long-range operation does not merely mean arriving at the destination but involves, also, a scrupulous technical flight-control procedure by

Thus far, items have been covered that cannot very well be controlled Adding the losses at this point, our payload is affected as follows:

Turbulence Intentional deviations Avigational errors Climbs Fuel unusable Passenger movement	. 129 . ,192 . 500 125 . 180	16 16 16
TOTAL	,1291	_

Some may claim, "That's why we carry a reserve". That's true, but heretofore regulations have required reserves to an alternate beyond the destination, plus a time reserve requirement. If these factors encountered enroute are not scientifically provided for, enough fuel may not remain for the alternate.

Large fuel requirements necessitate density consideration. Unit fuel weights will vary with base, cracking process, aromatic content, and temperature. All 100-octane fuels do not weigh the same under identical temperature conditions. On a circuitous route eastbound over the North Atlantic and westbound across the South Atlantic, the northern fuel may weigh 6.00 lb./gal, and the southern 5.80 lb./

If 6 lb. is considered standard, and loading is done by gallons, a 3,000-gal fuel load across the South Atlantic will weigh 17,400 lb. rather than 18,000 b. The 600-lb, difference is actually short-changing the pilot. It is fuel he thinks is aboard but isn't. This error however, may be controlled by a con scientious, pound fuel-loading system which requires hydrometers at all sta-

Cruise-Control Data

(Continued from page 185)

vantage in that the specific fuel consumption is shown for any bhp., with iny bmep.-rpm. combination consistent with that bhp.

Fig. 2b shows a typical manifold pressure-pressure altitude chart for

constant bmep, and carburetor fuelflow setting. It is important to note that the manifold pressure required to obtain a given brief., at a given outside air temperature and pressure altitude, and for a given carburetor fuelflow setting, is independent of engine rpm, within the cruise-control range.

Possible effects of rom, on the manifold pressure required are those of change in volumetric efficiency with change in rpm., and change in exhaust back-pressure with change in 7pm. These effects are negligible within the cruise-control range for a non-turbosupercharged engine, and not within flight-test detection.

Fig. 3 shows typical propeller characteristics as determined by propeller manufacturers. In this curve n is plotted against I for various values of C_{*} .

Fig. 4 shows a curve of fuel-flow, in lb./hr./engine vs. true speed, for level flight at a given density altitude, and for various gross weights. This curve assumes a fixed carburetor setting. with bmep.-rpm, combinations chosen for maximum ratio of propeller effieiency to specific fuel consumption, consistent with maximum bmeb allowable for continuous auto-lean operation as recommended by the engine manuracturer for best engine-life,

The data required to construct curves as shown in Fig. 4 may be computed from the basic data as given in Figs. 1, 2a, and 3, or the data required may be obtained directly from flight tests. Because of the flight-test analogy, the following mathematical method is suggested when computing tile data.

Assume that Fig. 4 is to be constructed for a density altitude of p. and for a fixed auto-lean carburetor setting. Also assume that a curve for Fig. 4 is to be constructed for a gross weight of W_1 .

With these assumptions, first choose a value of V2. With the p and W1 assumed above, a value of Viv may le computed. Ther from Fig. 1 the corresponding value of thpic may be obtained, and finally the thy required may be computed. This required the may be obtained in a great number of bmep.-rpm. combinations, but that combination which gives the highest value of n/c, taking into consideration the maximum bmep, allowable from the point of view of engine wear, is the proper combination to use for maximum range

At comparatively high gross weights at the beginning of a long-range flight, experience will show that η/c maxinum occurs at minimum c because of engine wear bmep.max. limitation. Thus if a value of N is chosen such that the bmep.man rpm, combination is consist-

various outside air temperatures, for ent with the propeller chart data in Fig. 3, and is at the same time consistent with the speed-power data of Fig. 1, it will usually be found that no other bmep.-rpm. combination need be tried. If the propeller characteristics are plotted in the form of n vs. J for various values of $\eta \times C_s$ rather than C, the foregoing process of determining the bmep. -rpm. combina tion consistent with propeller and speed-power data becomes simplified.

> As an example, for any value of N. J = V/ND is easily computed Also, since $\eta \times bhp = thp$, $\eta \times C$, may be directly computed because thp. is known. With these values of I and $\eta \times C_p$, η may be obtained directly from the curves of the propeller characteristics heretofore mentioned. Then bhp. =thp./n is computed, and from Fig. 2a, s.f.c., and finally fuel-flow in lb./hr./engine may be obtained. All these values may be plotted as shown in Fig. 4.

> If a curve of N vs. lb./hr. were plotted for various bmep.-rpm. combinations consistent with the propeller and speed-power data for constant V_1 it would be found that the minimum in this curve would occur at n/c maximum, and that this minimum would, for the high gross weights, occur at a bmep, much too high when considering a compromise between good thermal efficiency (high bmep., low s.f.c.) and long life for the engine. Thus, as stated before, except for the low gross weights, the maximum η/c combination allowable may be chosen immediately from bmep.man, considerations.

> In the low gross weight range, the thp. required for a given V near maximum-range speed is so low that the bmep man-rom. combination occurs at such a low N that n tends to drop off appreciably. In such case, a higher ratio of η/c may be obtained at a lower bmeb.-higher rpm. combination con sistent with the tho, required for the given V.

Using the ideas heretofore outlined, the data for Fig. 4 may be computed and plotted for various gross weights. A tangent drawn from the origin, O to any gross weight curve will determine the $[(L/D)(\eta/c)]_{mra}$ point (maximum range point) for no-wind at that gross weight. This point usually occurs at a C_a too great for proper controllability or proper automatic-pilot operation, or too close to C. when considered from the guststall viewpoint.

Thus, a line of maximum C_L allowed for good controllability and safe operation should be shown (see Fig. 4) covering all operational gross weights, In Fig. 4, constant bhp lines are horizontal and constant speed lines are vertical. If the maximum range point is required for headwind conditions,

LIBERTY AIRCRAFT MIRROR

The pilots of thousands of Allied fighter planes, now in action over our widely scattered battle fronts, are getting a perfect image of things behind them without eyestrain or fatigue, by means of Liberty Aircraft Mirrors.

Liberty Aircraft Mirrors are all first surface mirrors, and as permonent as their glass base. They give the pilot a clean, well defined image without distortion, immediately.

Each fighter plane equipped with a Liberty Mirror has a mirror built to meet the specific requirements of that plane. Thus the pilot changing from one plane to another gets uniformly good vision at all times, in all planes.

All Liberty Mirrors are now built only for War service, but later these battle tested vision devices will be available to all operators, military, transport or private.

MIRROR DIVISION

LIBBEY-OWENS-FORD GLASS COMPANY

DRACKENRIDGE PENNSYLVANIA



outstanding production Liberty has been granted a renewal of the Army-Navy Production Award, entitling them to add a star to their "E" flag.



"No "VIBRATION LEAKS' with this Advanced Koehler Drain Valve"



REPLACES AN 771 DRAIN COCK A.A.F. Approved . . Winterization Approved

A fool-proof drain valve developed to save service hours—that's the Koehler K17008 Drain Valvel Dependable, strong spring action snaps to full locked open or full locked closed positions. Slow, uncertain thumb-screw adjustment unnecessary. Safety wiring eliminated. Available in all sizes. Can be used in place of Part No. AN 770 in some applications.

ROEHLER AIRCRAFT PRODUCTS COMPANY 814 Vermont Ave., Dayton 4, O.

Producers of Aircraft (OI) and Fuel) Yelves since 1931.



the grice on the stated to the right by an amount equal to the head-wind component, and the tangents may be drawn to in this or grice O which is actually a groun speed rather than an airspece wight. The tailwing maximum range points are usually not considered practical because of the Calcontrollability sate speration limitations mentioned preceding.

Once the maximum range points have been determined for various gross weights, various altitudes (using other figures analogous to Fig. 4), and for various wind condition, maximum range may be determined by plotting in L/lb. vs. gross weight, and integrating the area under the curve. Mi./lb. hay be determined by dividing mi./hr by total lb./hr. as determined by the maximum range points.

In Fig. 4, the minimum points of the gross-weight curves represent the maximum endurance points. But these usually occur at such high C_L , it is not recommended that they be used when endurance is required, unless in case of emergency, as when waiting for weather to clear for safe landing conditions.

The shaded area a-b-c-d in Fig. 4 represents the auto-lean cruise-control operational boundaries. The line a-b represents the maximum gross weight limitation, b-c the maximum C_L-controllability safe operation limitation, and d-a the maximum cruise-power limitation. Another way for presenting the data in Fig. 4 is to plot mi./lb. vs. true speed for various gross weights. But this method has a disadvantage in that new curves must be made for headwind conditions.

From Fig. 4 it is easily seen that true airspeed for maximum range at constant altitude increases with gross weight increase, and follows very closely a constant C_L line (usually about .8). Thus, naturally, the indicated airspeed for maximum range increases with gross weight increase at constant density altitude. But at constant gross weight, the indicated airspeed for maximum range changes only very slightly with altitude, due to the effect of altitude on $\tau_L c_{max}$

When determining the data for Fig 4 directly from flight test, the to low-ing technique may be used

Let it be assumed that Fig. 4 is to be constructed for a density altitude of ρ , and for a fixed auto-lean carburetor setting. Load the airplane to a gross weight such that at the end of the climb to the density altitude, ρ the required gross weight, W_h , will be a relatively high value. Adjust manifold pressure for $bme/_{max}$ at any reasonable r/r/r within the cruise-control range using tor memeters, truit the airplane for level fight, and

plot average lb/hr/engine observed fuel flow vs true airspeed computed from observed airspeed indicator readings

Change rpm, keeping binep constant and again plot average lb/hr/engule vs true airspeed. When deter timing data for the low speed low gross weight section of Fig. 4, he sure to check it a lower lb/hr/engine may be obtained by using a binep lower than the binep........... recommended by the engine manufacturer for best enginelife.

Using the ideas aforementioned data for Fig 4 may be obtained for all speeds, gross weights, and altitudes.

Once a chart as shown in Fig. 4 has been determined, either by computation from basic information or from flight test directly, cruise control in formation may be readily obtained for any of the following cruise-control techniques:

- 1. Maximum range speed.
- Constant amount, or percent, of airspeed greater than maximum range speed.
- 3. Constant bhb.
- 4. Constant indicated airspeed
- 5 Any combinations of the fore

Then cost and profit analyses, based respectively, upon total flying cost computations and revenue considerations, may be completed to determine the relative economies of the various cruise-control techniques and the best block-to-block speeds for maximum profit rate per investment dollar.

Book Reviews

(Continued from page 208)

of aircraft, such as hellocopter, rocket thip, and jet propelled craft. Throughout the degiam orized common sense attitude is accented


SEAMLESS STEEL TUBE DATA. Seamless Steel Tube Institute, Pittsburgh, Pa., 320 pages, loose-leaf binder. \$2.50. Supplying much technical information on steel tubing this book is divided into sections, treating of general data, mochanical tubing, and pressure tubing, and there are handy reference tables.

BOMBER PILOT, by Philip Harkins. Harcourt, Brace & Co., N. Y. C. 229 pages \$2.00.


Story of an aveation cadet's progress through to the winning of his second heatenancy and suppership of a Boeing Flying Portress. Reflected is the tough grind which thousands of young Americans are undergoing to perfect the skills of sky combat.

COMPASS OF THE WORLD, Edited by Hans W. We gert and Vilhjaimur Stefansson. MacMillan Co., N. Y. C. 466 pages, maps, charts, index \$3.50.

Symposium of '8 authorities in the field of geography and international politics, interded to offer a fresh perspective on the rapidly shrinking planet Geopolities and geography are taken apart and put together again to show their workings and the vandity of the conceptions. It is stated that this book "is intended to correct some of the basic misconceptions of political geography which threaten to confuse the minds and plans of statesmen, soldiers, and the general public."

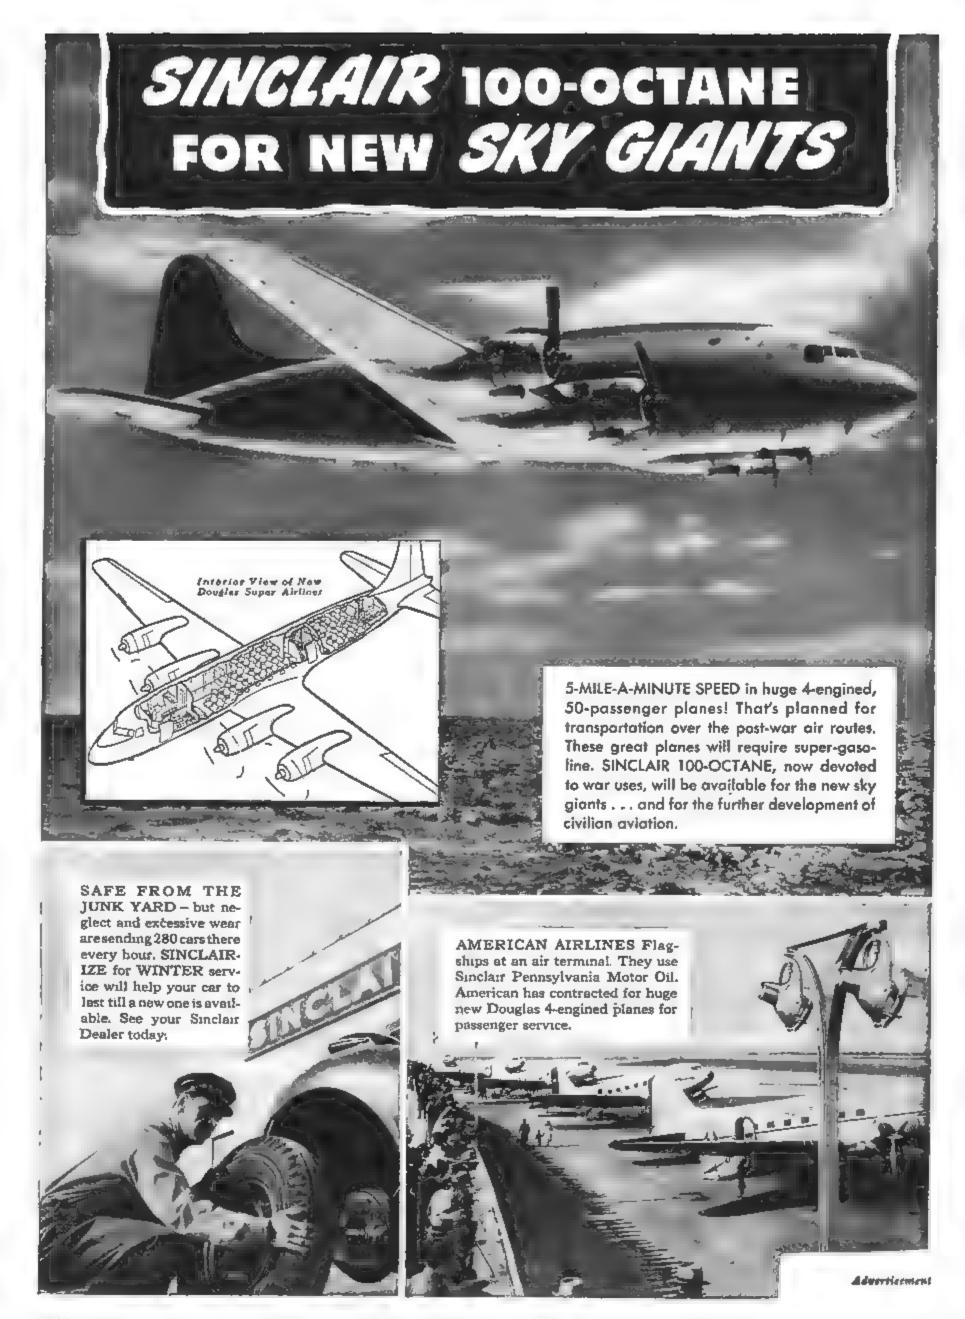

One of these Needle Bearings May Solve a Design Problem for You...

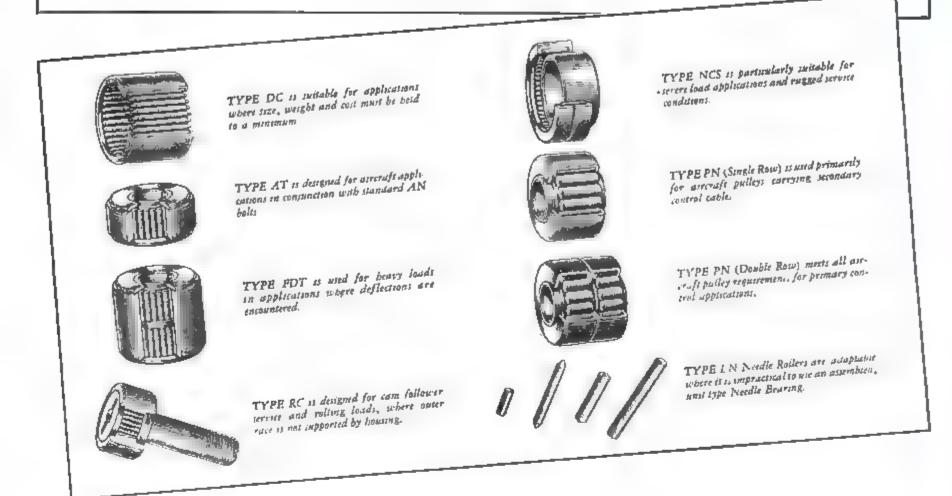

It may not have occured to you that there are so many different types of Needle Bearings—or that the completeness of the line of these modern, antifriction bearings makes them adaptable to many design requirements

Pictured above are eight different types-all different in design yet employing the same basic design principle of a full complement of small diameter needle rollers. Each is engineered for a particular task-or combination of design requirements. Individually each offers the same characteristic advantages of compact design, small size, light weight, high capacity, efficient lubrication and low cost.

The result is that in almost any application where Torrington Needle Bearings are employed, the design problem is simplified; operating efficiency and service life are increased; manufacturing costs are reduced, and sales features are added

Investigate for yourself how these advantages can be of assistance in your product planning. The Torrington Needle Bearing Catalog 30-A gives

complete information, and our engineering staff is ready to help you with any specific design requirement.

THE TORRINGTON COMPANY Established / 866 * Torrington, Conn. * South Bend 21, Ind Makers of Needle Searings and Needle Searing Railers" New York Boston Chrisdelphia Detroit Cleverand Septile

Landon, England

Son Francisco Chicago Los Angeles

TORRINGTON NEEDLE BEARINGS



CICE THIS FIGHTER'S RECORD

HIS MEDALS!

If there were decorations for industrial heroes Mr. Dag would be a much be ribboned gentleman. Perhaps we should call him 'Captain' Dag, because he commands so versatile a company of physical and chemical properties. Captain Dag (a campaigner who will never

be mustered out) represents Dag brand colloidal graphite, the smooth, black liquid concentrate which serves so many different war industries. Capt. Dag may take the form of a dry film, a fluid film, a surface coating, an impregnation, etc.

2 4 13 10 11 3

2. 4. 13. 10. 11. 3 CITATION: "Graphite films when applied

to the grids (and frequently the plates)

of radio tubes for receiving and transmit-

ting, are useful for minimizing secondary

emission, back emission and photo-



Conducts Electricity

> Withstands Temperature Extremes

Absorbs. Radiates and Conducts Heat

Maximum

Purity

CITATION: "We have been enthusiastic users of Dag colloidal graphite for more than ten years. We find it the only material which will prevent bolts, nuts and flanges from seizing under the high temperature and pressure conditions in

1, 3* 8, 14, 13, 5

our boilers and steam systems,"

1. 3, 19, 14 CITATION: "Dry films formed from Dag colloidal graphile supply durable lubrication on parts which could not be elfectively lubricated otherwise. Such films are functioning at temperatures from (~60° F.

Dag, Oildag, Aquadag, Castordag, G.ydag and Prodag are registered trade marks of Acheson Colloids Corporation Copy 1944 by Acheson Colloids Corp.

to +1200° F.) and



Black and Opaque

GRS Adsorbent

Little Photoelectric Effect

Low Miscible with Coefficient of Most Fluids Expansion

PROPERTIES

Films Adhere Tenaciously and Dry with Sharp Edges

> Microscopically Fine Particles, Penetrates Fine Pores

> > An Excellent Suspension

For easy reference we've given colors to Captain Dag's most valuable properties. Match these colors with the performance "citations" above. Then pın a medal on

yourself for putting Captain Dag to work in your plant. He's one campaigner who won't be mustered out



ACHESON COLLOIDS CORPORATION





COLD FINISHED CARBON BARS, SHEETS AND STRIP • SAE, AISI AND NE ALLOY BARS DRILL ROD • AIRCRAFT ALLOY BARS AND TUBING • STAINLESS STEEL SHEETS, STRIP, PLATES, BARS, WIRE, PIPE AND TUBING • SEAMLESS CARBON AND ALLOY TUBING SEAMLESS PIPE AND CONDENSER TUBING • WELDED CARBON AND ALLOY TUBING

PETER A. FRASSE & CO., INC. 17 Grand St., New York 13, N. Y. (Walker 5-2200) 3911 Wissahickon Ave.

Philadelphia 29, Page (Radcliff 7100 - Park 5541) P. O. Box 946, Buffalo 5, N. Y. (Washington 2000)

Jersey City 2, N. J. Hartford 5, Conn. Rochester 4, N. Y. Syracuse 2, N. Y. Baltimore 2, Md



armed forces-but now they are again available to civilians. Ask your aircraft parts supplier or write direct for a list showing Sensenich model numbers for all planes including government ships now being sold.

> REPAIR SERVICE now available for wood propellers of any make, at main plant or West Coast Branch.

SENSENICH BROTHERS, Lancaster, Pa. adjacent to Lancaster Municipal Airports West Court Branch, Glendale, Calif.

AVIATION, December, 1944

These men-by specifying and approving Sensenich propellers on the nose of their ships-have expressed their joint confidence in Sensenich's know-how as a wood propeller designer and producer,

propellers are standard equipment. But they represent the

combined efforts of quite a sizable group of the nation's best

tions above show only a few of

the ships on which Sensenich

No other propeller manufacturer has been chosen so often by

aircraft engineers, designers, builders and test pilots.

AIRCRAFT Sensenich PROPELLERS



... CHAMPION SPARK PLUGS

INSURE DEPENDABLE IGNITION!

built by Grumman, is setting almost daily, unparalleled records in combat. The combination of Navy pilots' skill, courage and daring, and the obviously great ships that they fly, is a winning one. "Hot" pilots and "hot" engines go together. Champion Spark Plugs and "hot" engines likewise go together, and championship performance is always the result. So today they are firmly established as true champions in the air,

The Navy's great fighter, the Hellcat as they are on land and water. Champion-Ceramic Aircraft Spark Plugs are standard equipment in the Pratt & Whitney engine which powers the Grumman Hellcat. Thus Champions continue to demonstrate their better performance and outstanding dependability in service where spark plug dependability may spell the difference between being victor or vanquished. Champion Spark Plug Company, Toledo 1, Ohio.









UNIONAIR RESPONSIBILITY HAS MADE THIS REQUISITION TODAY'S REALITY

Unionair has made important contributions, during the war effort, to the design and production of electrical assemblies for United States Naval Aircraft and the Aircraft Industry.


We intend to continue in the post war aviation world.

Our first contribution is a complete basic electrical system available to all light plane manufacturers.



WRITE FOR NEW BOOKLET "ELECTRICAL ASSEMBLIES MADE TO **CUSTOMERS**

Electrical Assemblies - Hydraulic Fittings - Conduit Fittings - Junction Boxes UNION AIRCRAFT PRODUCTS CORP. NEW YORK

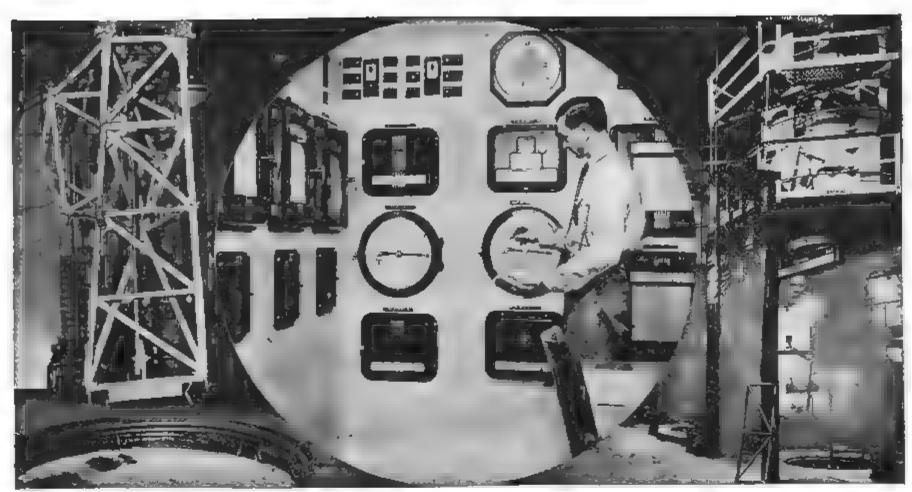

Jigged to prevent distortion, this welded member for the nacelle of a Beechcraft plane plunges which are located the Micromax Pyrometers to regulated which are located the Micromax Pyrometers to which nacelle elements are heated into oil quench Quenching is complete p 5 to 8 seconds.

Beech Aircraft's centralized control room in which nacelle elements are heated into oil quench Quenching is complete p 5 to 8 seconds.

BEECH INCREASES HEAT-TREAT EFFICIENCY By Centralizing Its Micromax Controllers

in the Beech Aircraft Corp. plant at Wichita, Kansas, include case hardening, annealing, normalizing, stressrelieving, hardening, etc. The job of automatically controlling the temperatures of these operations has been turned over to Micromax Pyrometers, with the result that their microresponsive control is giving Beech rou tinely dependable heat treatment

For utmost efficiency, instruments are centralized in a specially-designed control room. Here all Micromax Controllers have the same ambient temperatures; all operating conditions are standardized; one man keeps all temperatures under his eye. The room is supplied with air at a slight positive pressure so that dust and fumes cannot enter-a valuable time-saver when pyrometers, hardness testers and other instruments are to be kept at optimum accuracy and dependability,

depends on me! gan bur Leary American, I- Ad N 33-620(9)

Typical of the special equipment employed is that for airplane nacelles. These are hardened in vertical fur naces, set well up in the air and directly above the quench tanks. The furnaces are muffle units, gas fired and supplied with specially prepared atmosphere to prevent oxidation or other change of the plane parts. Nacelles are quenched through doors in the furnace

These furnaces have three firing zones, each with its Micromax Controller. In the round picture above, one group of three Controllers can be seen directly below the clock; the top and bottom instruments, on the first and third zones, are Indicating Controllers, while the middle zone has the Recording Controller which the foreman is examining.


These instruments bring micro responsiveness to temperature regula-


Heat-treating operations performed Instrumentation of Vertical Furnaces tion, so that almost simultaneously with the appearance of heat lags or surges, the fuel valves are adjusted to bring temperature back to the control point. Equipments incorporate the outstanding features of Microinax design: sturdy machine-type parts extra-heavy gears, shafts and bearings, fine construction throughout



Further information will be sent on request; either a general catalog or specific engineering data, as you prefer.





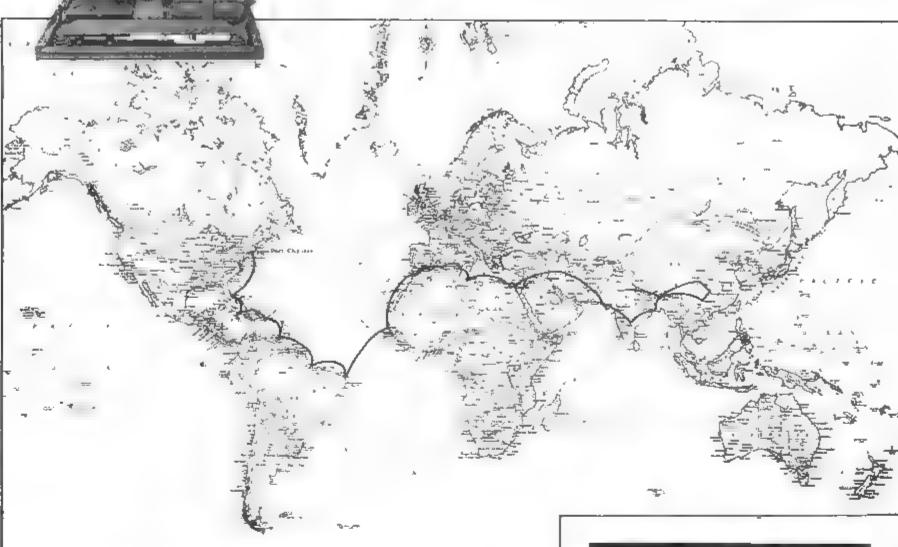

6 American Map Co , Inc., New York, No. 10634

From Port Chester, New York, to Chungking, China . . . with plenty of stops in between.

Just one trip of many . . . made by a Homelite service man . . . to get facts . . . to find out how Homelite Portable Generators are performing and standing up under the tough conditions of war.

On trips like these . . . to Alaska, Africa, India and all the theatres of war, Homelite men get the "dope" first hand. And they transmit their information back to our engineering department where new advancements in design and performance are constantly being made to meet the pace.



Yes, trips like these will do you a lot of good. For they have piled up a wealth of priceless experience that will enable us to give you better generators, better pumps and better blowers, than you ever had before.



Better cold weather operation . . . better hot weather operation . . . new cooling methods . . . advanced type bearings . . . less trouble and maintenance . . . much longer wear . . . more power . . . more portability . . . these and many other features will be but standard advantages of the New Homelite Gasoline-engine driven

THE BENEFITS FOR YOU

Generators, Pumps and Blowers that you will get and use, after the war is over.



Photo-Courtery Fairchild Agreralt

RIDING ON AIR DEMANDS THE STRENGTH AND LIGHTNESS OF A Steel Tube FRAME



"Tubes of Air Surrounded by Steel" have no superior for the airplane framework. The welder makes just work of assembly and welding on fittings.

Seamless steel tube struts make a fuselage frame for this Fairchild Trainer that combines strength with lightness. Globe Seamless Steel Tubes are made in a plant devoted exclusively to the manufacture of steel tubing . . , where every process from piercing the billet to finish grinding is closely controlled.

An exacting inspection is given every finished tube. Even the chance of a stray tube of different analysis getting into a shipment is eliminated by passing all tubes through the Identometer test.



GLOBE STEEL TUBES CO. Milwankes 4,

LE PUMPS . GENERATORS .



The development of this special bullet-resisting glass, accomplishing an improvement formerly thought impossible, is typical of the contributions to airplane glazing made by Pittsburgh Plate Glass Company. Such developments have given this company recognized leadership in the

held of airplane glass and glazing. If you would like further technical data on any aspect of safety glass for airplanes, write us on your business letterhead. Address Pittsburgh Plate Glass Company, 2336-4 Grant Building, Pittsburgh 19, Pennsylvania.

"PITTSBURGH" stands for Quality Glass and Paint




PITTSBURGH PLATE GLASS COMPANY


Specialists in Airpiana Glass

MAKERS OF DUPLATE AND FLEXSEAL SAFETY GLASS AND OF MULTIPLATE BULLET-RESISTING GLASS


AKERS OF DUPLATE AND PLEASERL SAFETT GLASS AND OF MULTIPLATE BULLET-KESTSTING GLA

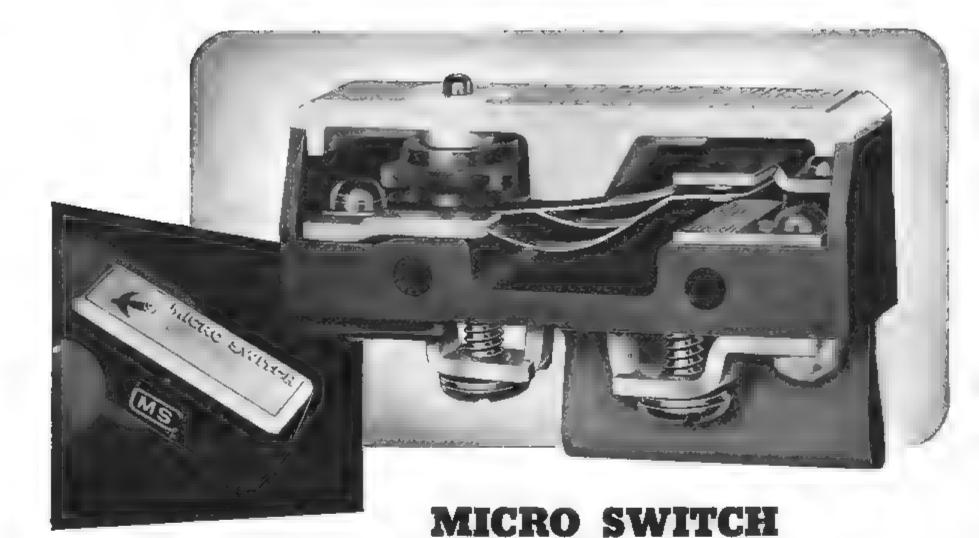

Most widely used precision snapaction switch in the world



The new Type "A" actuator is of cold rolled steel with cadmium plate floish. Movement of flerential is 03 "maximum, operating pressure is approximately 6 ounces, pre-travel is approximately ½" overtravel a approximately ½".



"ypa m series of panel mounting brackets after two
lengths of threaded stems for
easy positioning Operation
takes place in first 1 32" of
plunger travel. Overtravel
of "A" or "A" is provided,



Type I bracket has been widely used as throttle warning switch singly or in gangs. Operated by cams on throttle quadrant or dags on cables. A sturdy mount and actualor for general use as a limit switch.

Especially designed for aircraft, the Type R-31 Micro Switch has been successfully used on millions of aircraft installations which include all types of fighters, bombers, transports, commercial and private planes.

The cut open switch illustrates the basic Type R-31 M.cro Switch. The three blade beryllinm copper spring is the patented heart of the Micro Switch. Carefully hear treated, its one piece construction insures extremely long life...eliminates lost motion and friction between loosely coupled elements. Spring dimensions are accurately held to insure uniformity through millions of accurate repeat operations. Contacts move in the same direction as operating plunger so that its direct force is available to break contact welds which might result from accidental overload.

Outside leaves of the beryllium copper spring pivot in grooves of patented shape in 2 solid brass anchor. Operating planger is a highly polished, hard, stainless steel pin insuring long, trouble-free, accurate performance.

Deep, box type construction of the *molded Bakelite* case gives the rigidity necessary for accurate repeat performance over wide ranges of temperature and operating conditions. Coversare permanently secured to housings to prevent tampeting with accurate adjustment of elements.

All basic M.cro Switches are rated by Underwriters' Laboratories and Canadian Engineering Standards Association as follows: 10 amperes, 125 volts A.C.; 5 amperes, 250 volts A.C., 3 amperes, 460 volts A.C.

Contact reparation spacing shown is .070°. This relatively wide gap, pioneered by Micro Switch Corporation, has proven successful in switching big by inductive D C loads up to 45 000 feet altitude. For A C uses, contact separations of 0.0° to 0.20° are used successfully. Terminals shown are of the heavy duty screw type, standard on aircraft.

A few of the actuator brackets designed to accommodate the Type R-31 Aircraft Micro Switch are shown on this page. Their use permits fast and easy installation and makes for easy field re-accument without districting bracket






Type M82731A skeleton bracket has definitely controlled pretravel and overtrave — a total of 1/2" Meets Air Corps specifications for Types A-1 and A 2 switches.



Type M series of aluminum housings, one illustrated an complete with plunger actualor Can be seated against spiesh, dirt or oil. "A N" out let fittings may be straight a distribute to A5 desired."





in Type R 31 Micro Natich, send for Arci ift Catalog No. 71.

© 194



Ask any navigator, whose calculations have controlled the fate of trackless transoceanic flights, how he feels about aerial sextants. Invariably he il answer that a sextant is more than an instrument of precise measurement. It's something you trust — or don't. It has to do with air-instinct. Something known only to men who know the skies.

Ed Bolton, chief navigator of the far flung routes of the TWA Intercontinental Division says, 'Our navigators use Fairchild Aerial Sextants almost exclusively on all transoceanic flights. They are dependable, rugged, compact, accurate."

And rightfully so. For Fairchild Aerial Sextants were developed from a basic design suggested by the U.S. Army Air


Force to be compact, lightweight, easily handled . . . with a bubble that remains 'stable' . . . with automatic recording of consecutive sights during the entire sighting cycle of optional duration.


Fairchild leadership in the design and precision production of aerial operations instruments... which include aerial sextants, cameras, radio direction finders, lead computing gun sights... is the reward of an air-minded policy of engineering and building far beyond the stated basic specifications of any given problem. New York Office: 475—10th Avenue, New York 18; Plant: 88-06 Van Wyck Boulevard, Jamaica 1, New York





AVIATION, December, 1944

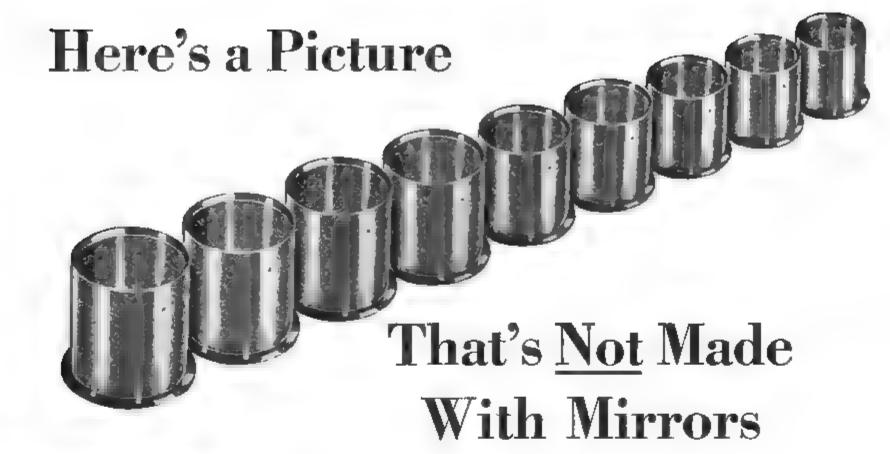

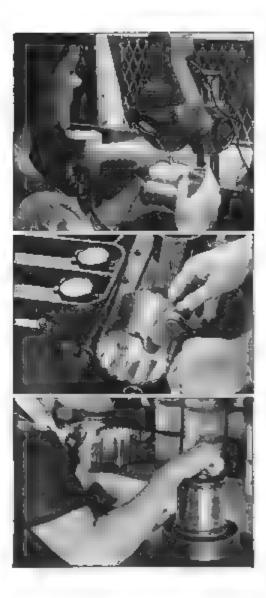

Like Tweedledum and Tweedledee, these Mallory Bearings look so much alike that they might be photographic copies of each other—eight reflections of a single bearing. As a matter of fact, they ARE alike; so much so that, even under precision tests, they show less than one-tenth of one thousandth of an inch variation.

It's a vital matter that these bearings—in appearance as well as fact—are uniform. They're used in the fastest military planes today: planes where tolerances are measured in split-thousandths, where uniformity and dependability are critical essentials.

Mallory Bearings, made by the Mallosil Process, measure up to these standards, which is why so many manufacturers have adopted Mallory Bearings for exacting uses. By bonding silver to base metal backings, the Mallosil Process permits large scale production of precision aviation bearings that meet the most brutal stresses and strains that fighter and bomber engines must undergo. Thanks to the control given by the Mallosil Process—and to rigorous inspection methods (some of which are illustrated)—Mallory Bearings attain practically one hundred percent uniformity.

Mallory Bearings give rich promise for the future: in commercial aviation, trucks, buses, machine tools, Diesel-powered engines and elsewhere. War production occupies our stage today. But we are looking ahead to tomorrow—and will be glad to discuss bearing problems and applications for peace-time designs.

*Reg. U S. Pat. Off

P. R. MALLORY & CO., Inc., INDIANAPOLIS 6, INDIANA



MALLORY

SERVES THE AVIATION, THE AVIATION-INSTRUMENT AND THE AVIATION - COMMUNICATION FIELD WITH WELDING TIPS, THE MALLOSIL* PROCESS—BEARINGS, SPECIAL ALLOYS, S. VIBRAPACKS,* CONDENSERS, ROYARY AND PUSH BUTTON

ELECTRICAL CONTACTS, VIBRATORS, VIBRAPACKS,* CONDENSERS, ROYARY AND PUSH BUTTON SWITCHES, ELECTRONIC EQUIPMENT, COMMUNICATIONS HARDWARE, RECTOSTARTERS*

AVIATION, December, 1944

Invest in America-Buy War Bonds



Revolutionary new design enables armored trucks, tents, sleeping bags and many other Crown Zippers to slide freely around sharp curves—slide faster, smoother!

Today, Crown engineers, working in the field with Air Corps, Ordnance and Quartermaster officers, have developed a zipper that is making history-a zipper that actually slides freely around sharp curves.

Tomorrow, when the last shot has been fired, this great new zipper feature will find many applications in the aviation field-for engine covers, built-in inspection slits that can be zipped open, baggage compactment openings-and for many other vital jobs.

But a Crown Zipper's ability to take curves is only one of many basic advantages it has over ordinary, old-style zippers. (See complete list below.)

That is why Crown Zippers are in action today throughout the world - on airplane gun turrets

military items where human life depends on instant,

Remember, when you turn to post-war Crown designers will adapt-or, if necessary, create-special zipper applications to meet special needs. Remember you can zip faster, further, more securely, with a Crown Zipper'






















ETIZE









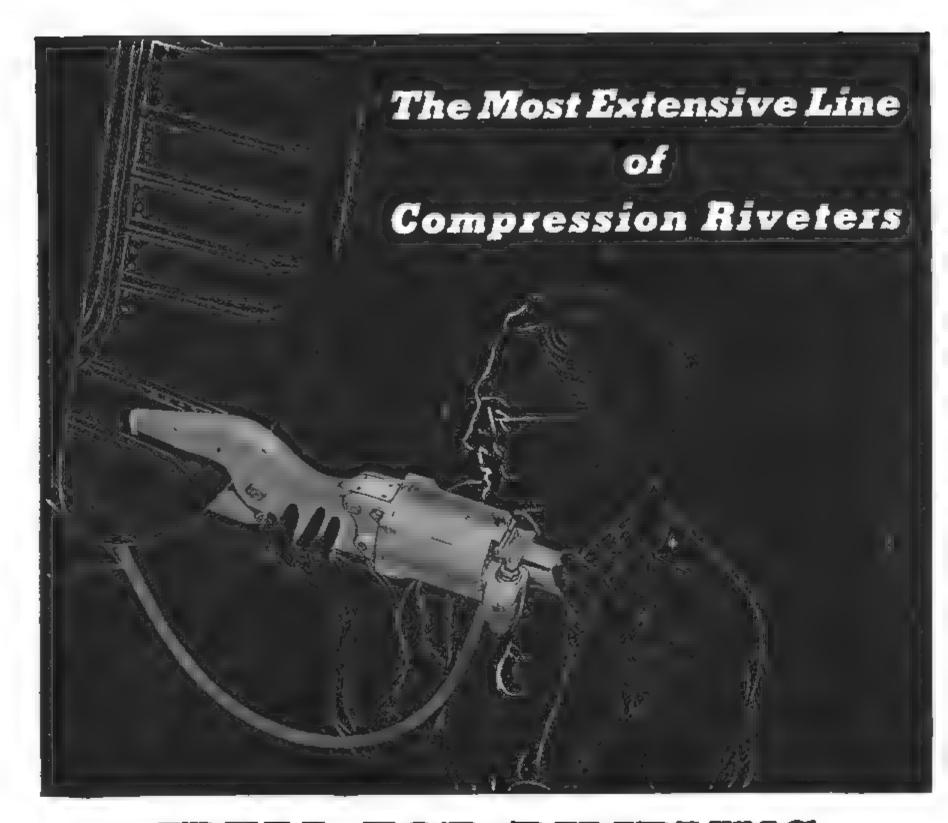


IDEAL FOR DIMPLING


CP offers the most extensive line of compression riveters - double purpose tools which are ideal for dimpling as well as riveting. They drive tight rivets with a single stroke and form a head of proper height. CP Compression Riveters - Dimplers are available with yokes of various shapes, sizes, reaches and gaps to meet individual requirements.

Chicago Pneumatic portable, semi-portable and stationary Compression Riveters cover a rivet range of 1/8" in Dural, aluminum, iron and steel to 14" in Dural, iron and steel and 5/16" in aluminum. For complete information, write for Catalog No. 564.







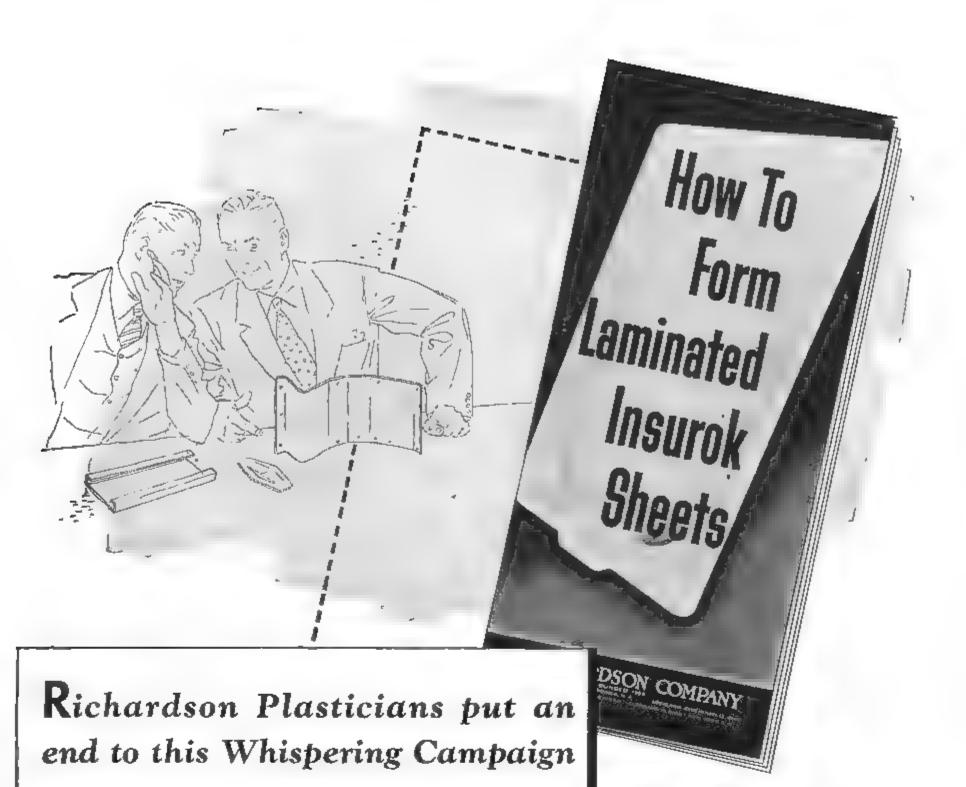

They've taken the mystery out of forming Laminated INSUROK plastic sheets! For actually it is a simple process... one you can do yourself if you know how. And here is a small booklet that puts you in the know... the A B C's of how to form laminated plastic sheets yourself.

It is as easy as this:

- A. HEAT the laminated sheet uniformly slightly below the blistering point.
- B. INSERT the heated sheet in the forming fixture and apply pressure.
- C, ALLOW part to cool and then remove.

Result . . . the shape is now permanent.

Laminated INSUROK plastic sheets for forming

have varied uses. They combine strength with lightness... are resistant to sudden changes in temperature... withstand the destructive actions of most chemicals, reagents, and solvents.

Write today for the booklet that tells all about forming laminated plastic sheets... "HOW TO FORM LAMINATED INSUROK SHEETS." It's FREE for the asking. Send for it on your company letterhead.

You may prefer to have the forming done for you. If so, the working knowledge and years of practical experience of Richardson Plasticians are at your disposal.

INSURCE Precision Plastics

The RICHARDSON COMPANY

NEW BRUNSWICK, N. J. FOUNDED 1885 INDIANAPOLIS I, IND. LOCKLAND, CINCINNATI IS OFFICE SETSOF OFFICE SESSED AS BUILDING, DETROIT MIGHIGAN NEW YORK OFFICE SESSED NEW YORK OFFICE SESSED



AVIATION, December, 1944



"This sounds like the old days when I used to hint to the folks about the things I wanted — like the electric razor that made me feel so grown-up just to think about!

"But this year — well, what I want comes in an awfully big package. What I want — and all the fellows I'm teamed-up with, too — is to see a few more B-29's around these parts!

"Yes, a B-29 costs a hell of a lot of money. \$600,000, they tell me! But you ought to see what one of those babies can do to the plenty-tough guys in front of us! And I'd hate to tell you what it costs not to have that kind of help. It costs — well, the way we reckon costs around here is in how many kids won't make the trip back home."

*

Let's forget that a War Bond is the safest investment in the world. Let's forget, even, that the more War Bonds you buy the more you help curb inflation, and build a firmer future for all of us. Let's remember only one thing: this war is far from over: the war in the Pacific is one of tremendous distances—and correspondingly great costs: yet a brutal adversary that is fighting savagely every inch of the way must be defeated. Let's help the boys who have that job to do by doing our job with War Bonds. Help shorten the war—with an extra Bond today.



Reprints of the above message, for poster use, will be gladly furnished authors charge.

AMERICAN FLANGE & MANUFACTURING CO. INC., 30 ROCKEFELLER PLAZA, NEW YORK 20, N.Y.

TRI-SURE PRODUCTS LIMITED, ST. CATHARINES, ONTARIO, CANADA



MERIAM

A New Altimeter Test Unit for Testing Altimeters and Rate-of-climb Indicators

THIS new unit is very compact, and simple to operate. It consists of chamber, integral vacuum pump, control valves, and electrical equipment.

It is complete requiring no other accessories for complete testing of altimeters when using a master standard altimeter.*

*A standard Meriam well type manometer can be furnished with scale graduated directly in altitude if required.

Among the many features of the Meriam Altimeter Test Unit are:

- Chamber designed for testing four instruments at one time.
- Internal instrument mounting plate removable from chamber for independent mounting of instruments.
- 3. Vibrator included which eliminates drag on indicating pointer of instruments.
- Heavy duty vacuum pump which will evacuate chamber to 2 inches of merevacuate chamber to 2 inches of mercury absolute or equivalent of 60,000 feet.
- Metering valve for accurate control of vacuum exhaustion and rate of vent.


THE MERIAM INSTRUMENT COMPANY

10928 Madison Avenue . Cleveland 2, Ohio

MERIAM-THE INSTRUMENT PEOPLE





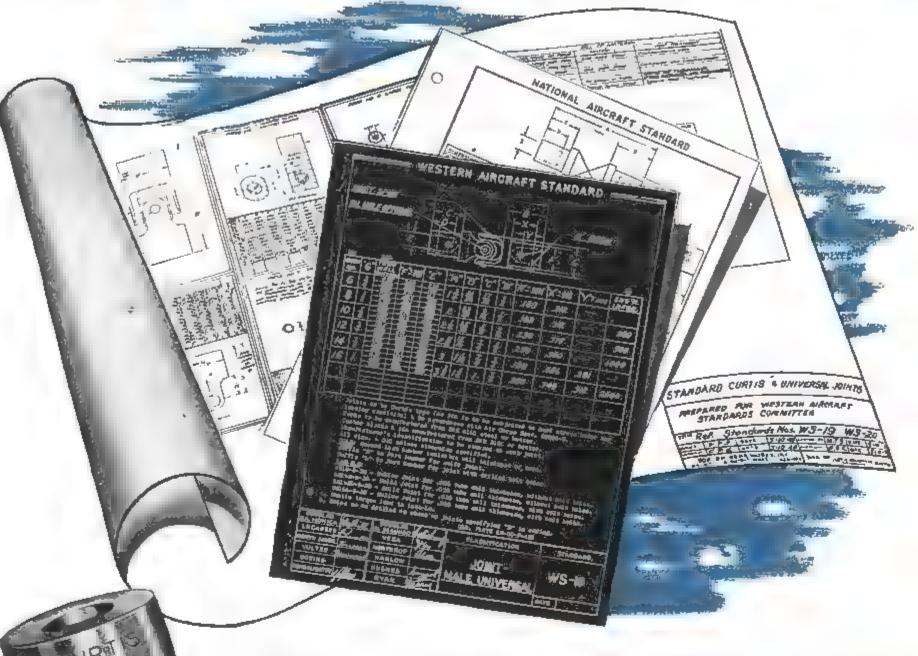

From Planning Board through production — Standard specifications for every part must be drafted and rigidly held to secure accuracy and quality in our fighting planes, trainers, bombers and transports. "Aircraft Standards Committees" in

"Aircraft Standards Committees" in 1940 found that Curtis Universal Joint "Standards" answered their needs.

Curtis "Standards" for Universal Joints, in use for many years, fill every requirement for engine controls — retractable landing gear — control flaps — auxiliary power controls — elevator spars or in any installation requiring out-of-line transmission of power or rotation of control shafting around corners or at angles. The Curtis "Standards" were the basis in establishing

"Aircraft Production Standards" followed by leading aeroplane manufacturers today.

Curtis Universal Joints are to be found in the thousands of planes used by all branches of the Armed Services in the four corners of the world. . . At home too . . . in the many machine tools where Curtis Universal Joints transmit power in multiple drill presses, grinders, milling machines, etc. . . . the Curtis "Standards" have proven that knowledge gained through years of experience in production can, and will, lick difficult problems.

This experience is yours for the asking . . . send us your universal joint problems. Curtis Engineers are at your service.




CURTIS UNIVERSAL JOINT CO. INC.

SPRINGFIELD, MASS. . BOSTON GEAR WORKS, NO. QUINCY, MASS., SOLE DISTRIBUTORS



Gits Oil and Grease Seals represent over thirty years of lubrication research.

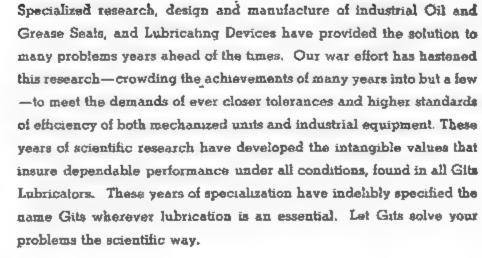

GITS BROS. MFG. CO.

1859 South Kilbourn Avenue - Chicago 23, Illinois exclusive for over 30 years

"MADE BY NATIONAL SCREW"

means





19th outlining procedures to be followed in establishing Quality
Control Rating for the National Screw & Mfg. Company The Air Technical
Service Command is pleased to advise that Quality Control procedures at your facility are such as to warrant approval. Therefore, the National Screw & Management for the Army Air Forces records as a Quality Control APPROVED" facility.


As a principal source of supply for aircraft fasteners, we have developed facilities for achieving tolerances formerly unheard of in bolts, nuts and screws.

There is only one way to insure rigid adherence to the quality required by the Air Forces, with a production of millions of parts daily. That is by a system of inspection that is complete and foolproof.

The excerpt reproduced above from a recent letter

of formal approval from the Air Technical Service Command indicates how well National Screw has achieved this goal.



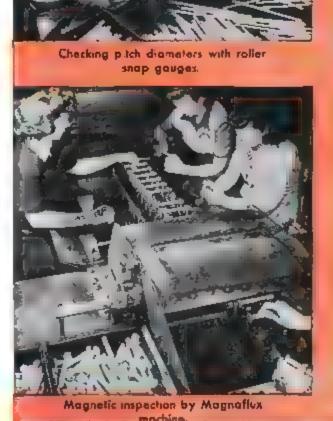

THE NATIONAL SCREW & MFG. CO., CLEVELAND 4, O.



LIKE MOST OF AMERICA'S AIRPLANES

INESE BEECHCRAFT TRAINERS CARRY

ACRAWATER LEATHER UPHOLSTERY

wherever leather upholstery is used in practically all of the leading war and transport planes made in America today. The reason: Lackawanna Leathers are tanned to the exact requirements of the jobs they have to do. For instance: Our Lite-Flite leather, tanned especially for aircraft, weighs only 2 oz. per square foat . . . yet it's sturdy, sound-absorbing and luxurious as only genuine leather can be.

ARMY E NAVY

THE Sackawanna Seather co.

"Agents: PACIFIC HIDE AND LEATHER CO.
OF AMORLES ... 716 E. WASHINGTON BLVD. * EAN FRANÇISCO... 50 HAWTHOUND STREET * MATTER.... 1424 YOTH AVE.



Shrinkage cracks in 2 cast aluminum motor housings.

ZYGLO* FLUORESCENT PENETRANT INSPECTION

Suppose that hereafter, in your castings all shrinkage cracks, hot tears, cold shuts and other surface discontinuities carry a shining signal light. Under such an ideal condition, as clients of the Magnaflux Corporation can testify, it is possible to maintain the highest standard of quality in any group of competing companies, and win leadership as well as reputation.

"Spot-lighting" such flaws is the actual result of installing the Zyglo Method. Four simple steps are performed rapidly on every part that comes off the production line. The method is non-destructive and all parts passing inspection can be used.

First, Zyglo penetrant carrying fluorescent material is flowed over the part; then after washing, drying, and dusting with developing powder, it is examined under "black light." Illuminated indications are brought out which can be interpreted by the experienced inspector—frequently resulting in correction of the cause.

Get the full story of Zyglo Inspection from a new bulletin now available. Write for it.


*ZYGLO... the Trade Mark of Magnaflux Corporation applied to its equipment, material and methods for fluorescent penetrant inspection.

MAGNAFLUX CORPORATION
5906 Northwest Highway, Chicago 31, Illinois

NEW YORK . DETROIT . DALLAS . LOS ANGELES . CLEVELAND . BIRMINGHAM





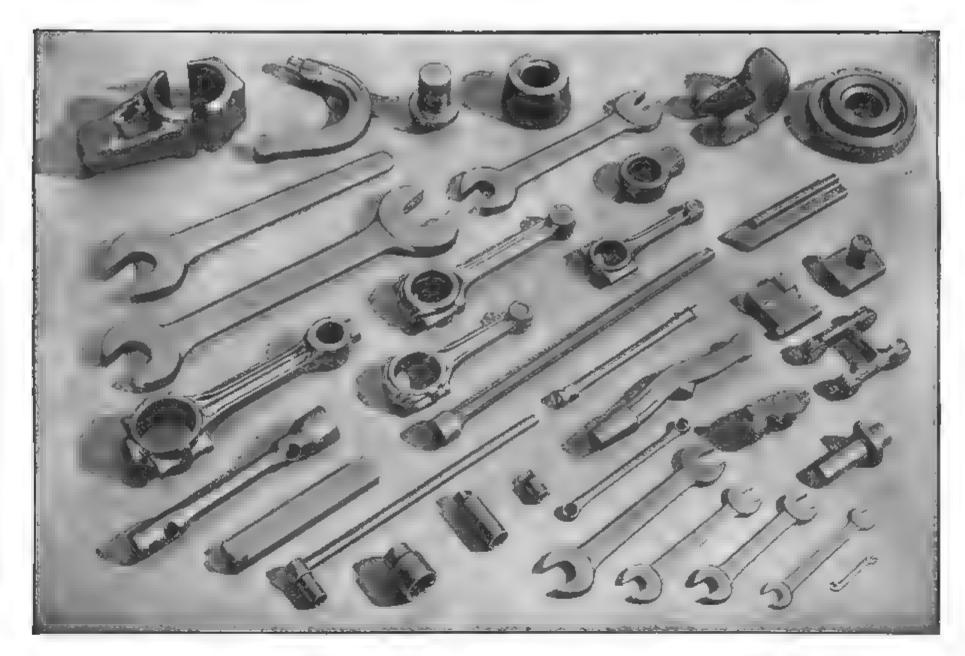

Herbrand PRECISION FORGINGS

Upset or Drop Forged--Any Shape or Size up to 200 lbs.

You who use forgings in war production work won't have a problem of faulty forgings if the job is being done by Herbrand. Our expert hammersmiths, who have made forging their life business, maintain uniform dimensions and close tolerances producing forgings which are free from defects.

Since our organization was founded in 1881,

Herbrand has never lost sight of the importance of producing quality products conforming to exacting specifications.

Today the counsel of the Herbrand engineering staff is available to help solve present war production problems, or for post-war planning . . . Your inquiries are solicited.



Increased Power and Constant Speed

... YET FITS MOTOR SPACE AVAILABLE



The requirements of a manufacturer of instruments called for a constant speed motor that had more power than a standard clock motor previously used, yet still fitted the original space allowed.

Holtzer-Cabot designed the special synchronous motor, illustrated above, which not only filled the performance and space requirements, but saved the manufacturer the cost of redesigning and retooling to take a larger motor, and also made it possible to service instruments in customers' plants which had the old type of motor.

The specialized business of Holtzer-Cabot is the designing and building of special fractional H. P. motors to meet special requirements

Although today our entire facilities are devoted to building special motors for military use, our motor development engineers will gladly discuss your postwar fractional H. P. motor requirements with you.

Typical Recorder Powered with Holtzer-Cabot Motor

Special Motors Designed to Fit the Application
HOLTZER-CABOT

Division of First Industrial Corporatio


Designers and Builders of Special Fractional HP Motors and Electrical Apparatus

125 AMORY STREET, BOSTON 19, MASSACHUSETTS . CHICAGO, ILLINOIS . NEW YORK, NEW YORK . PHILADELPHIA, PENNSYLVANIA

AVIATION, December, 1944 AVIATION, December, 1944

SAFETY... INSURANCE FOR



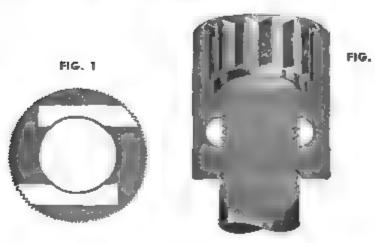

"UNBRAKO" INTERNAL WRENCHING and FLUSH-HEAD **BOLTS**

Our INTERNAL WRENCHING BOLT (B) and 100° FLUSH-HEAD SOCKET BOLT (C) fully meet the high degree of precision demanded by the aviation industry. They are made to tolerances so extremely close as to be practicable only by our long and extensive experience in precision work. The internal wrenching feature facilitates compact designs—a saving in weight, material and cost.

Over 40 years in business

TANDARD PRESSED STEEL CO.

Baston - Oetroit - Indianapolia - Chicago - St. Louis - San Francisco



A safety nut for primary connections in aircraft-officially approved. An absolutely dependable locking grip is achieved by means of two vulcanized fibre plugs (Fig. 1) inserted through the body of the nut. Fig. 2 shows how these plugs contact four threads of the bolt, gripping it firmly.

This design also permits maximum thread length in the nut. Heat-treated to a high degree of Rockwell hardness, the "Unbrako" can be used almost indefinitely before the torque falls below the Wright Field minimum.



AVIATION, December, 1944



found on land and sea airports.

and has plenty of power to move singlehanded the heaviest four motored bomber on the runway. The single rear wheel model has a drawbar pull of 2,500 pounds; dual wheel model, 4,000 pounds.

EASY TO HANDLE-The MOTO TUG is 46" high and 58" wide. It is low enough for driving under most wing and tail assemblies and in crowded hangars its 9'8" turning radius makes possible "hair-

SAFE TO USE-With the MOTO-TUG, safety is first. A spark arrester on the exhaust eliminates a

In the picture below, the Ford Tractor with Ferguson System is shown towing a light plane. Relieving heavy-duty units during traffic peaks is only one of many jobs it was designed to do.

With this tractor and attachments you will be surprised how far maintenance costs can be reduced. Attachments include a heavy-duty mower, front mounted sweeper, a blade terracer, scoop, loader, to mention only a few. These attachments are operated, hydraulically, with a finger tip control lever. The tractor operator is the only man needed.





• Up at the Yale and Towne Manufacturing Company in Stamford, Connecticut, craftsmen have been making the wellknown "Yale" locks and builders' hardware for many years. The enviable reputation enjoyed by this company is the result of their insistence for fine quality.

Now as a major contributor to the war effort, Yale and Towne are producing hydraulic pistons and cylinders. Constantly endeavoring to improve their already superior quality, they use the Brush Surface Analyzer in both laboratory and shop. With this instrument they are able to study surface finishes, accurately measured to one millionth of an inch (.000001") from chart recordings instantly made as the specimen surface is explored.

THE BRUSH DEVELOPMENT COMPANY

3443 PERKINS AVENUE . CLEVELAND 14, OHIO




Feather-Weight all-aluminum oil coolers and coolant radiators... made of Hydron extruded tubing... brazed by Clifford's patented method... represent "one of the greatest contributions in recent years to reduction in weight of equipment items for aircraft." So reports the Society of Aeronautical Weight Engineers in presenting Seal of Approval Certificate No. 44-16.

Battle-tested in two types of USAAF fighters, saving approximately 120 pounds in one and potentially more than 300 pounds in the other, Clifford Feather-Weights are now being developed in elliptical and oblong shapes for new warplane models.

How about Feather-Weights for post-war planes? Although our production is 100% in war work, our engineering department occasionally finds time to do a little looking ahead. Already we're in correspondence with several aircraft manufacturers who have an eye for the future . . . who can visualize the increased payload, speed, range, obtainable by replacing heat-deteriorating, heavy-weight copper with heat-treatable Feather-Weight Aluminum in oil coolers and coolant radiators. Maybe we can do some planning with you? Let's talk it over.

CLIFFORD MANUFACTURING CO. 562 I. First St., Boston 27, Mass.

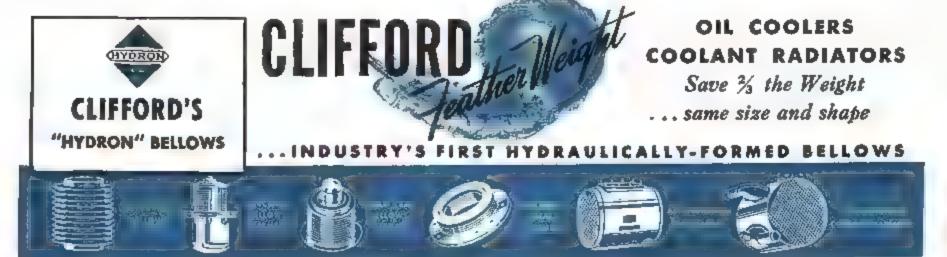



NOW IS THE TIME TO RE-EXAMINE YOUR AVIATION ADVERTISING PROGRAM



AVIATION is entering the most important marketing transition in its history. The selection of aviation advertising media must be more critical than ever before. With some 36 publications from which to choose, the keenest judgment and analysis must be exercised by the advertising buyer to select those that offer adequate coverage of the true buying influences of aviation. We believe the most rational approach is through a clear definition of the structure and buying functions of the aviation market.

Aviation's market structure is simple. It is divided into three, and only three, major divisions:

- 1-Military Aviation . . . calls for continuing coverage—for the military has always been and will continue for some time to be aviation's biggest dollar customer.
- 2—Air Transport... calls for more intensified coverage than ever as our swiftest-growing public carrier.
- 3—Personal Aircraft . . . calls for strong coverage of the key men who will sell and service planes, distribute parts and accessories, operate airports—the fixed-base operators, distributors and airport managers.

The functions of the industry are manufacturing, operation, maintenance and distribution.

Frequently misinterpreted as divisions, they are, in fact, functions within the three major divisions.

They are closely related and interdependent, So closely, in fact, that it is almost impossible to say where one stops and the other starts.

This interrelationship is of utmost sales importance to you. For in aviation the manufacturer must work closely with the operator, the maintenance engineer, the distributor and even with the ultimate consumer. No transport plane is ever designed by the manufacturer alone. The airline engineers always sit in. The same is true in military aircraft. And obviously the fixed-base operator has a vital stake in the design and engineering of the personal plane he will sell and service.

In the same way, operations and maintenance work as a team both with the distributor and the manufacturer.

This pattern repeats itself throughout your aviation marketing. You cannot in your selling separate the four functional buying influences, for all of them play a part in the purchasing of your products.

Here, then, is the key to the building of a sound and adequate aviation advertising program . . .

(over)



AVIATION

 for foundation coverage of aviation's multiple buying influences.

Aviation serves not just one, or two, but all four of the industry's buying influences . . . Manufacturing—Operation Maintenance - and Distribution.

For these four functions are interdependent and interrelated. The men of each of them exert a vital buying influence that affects all your aviation selling—whether to the military aviation market, the air transport market, or the personal aircraft market.

Researchers, designers, engineers and production executives are concerned not only with the building of airframes and components but also with the operation, maintenance and distribution of their products after they leave the factory. Conversely, operators, maintenance engineers and distributors exert strong influence on the designing and engineering of the planes they will later sell and service. Throughout all the functional activities you find a close intermeshing of interests.

That is why Aviation's editorial policy has for 28 years been the serving of all the industry's interlocking interests . . . Research, design, engineering and production. Operation, finance, distribution and maintenance in all its phases. Legislation and administration.

That is why Aviation maintains the largest staff of editorial specialists in the field of aeronautical publishing That is why Aviation has 42,000 paid subscribers representing all functions of the industry.

To you Aviation offers comprehensive advertising coverage of all aviation's buying influences—the FOUN-DATION MAGAZINE on which to build your aeronautical advertising schedule.



YOUR REQUEST will bring the whole story of "AVIATIONtoundation magazine on your aviation schedule."

AVIATION NEWS

. . . for intensive coverage of aviation's 10,000 key men.

The 10,000 paid subscribers of Aviation News offer you one of the most influential buying groups in U. S. industry today. They are the top executives of our aircraft builders, and of the plants that supply them with engines, propellers, parts, equipment, instruments and accessories. They are the military officials and civilian administrators who direct our government's huge and expanding interests in aviation development. They are the leaders and planners of U. S. airlines. They are the key distributors of tomorrow They are the men who control the buying decisions in the many, many businesses that have a vital stake in the future of aviation.

To these leaders, Aviation News supplies each week the informational background so essential in decision-making, in market-planning, in laying the groundwork for aviation's future.

Aviation News (the only aeronautical weekly) was created specifically to speed the news and its implications in fast, readable, interpretive reports to the men who are molding the postwar shape of aviation.

Every one of Aviation News 10,000 key audience subscribed to Aviation News within 10 months after its first issue. This is a circulation record without precedent in its field. For remember, Aviation News' subscription rate is \$5 a year, not the usual \$3. And its circulation is truly selective, subscription sales being carefully confined to the very top of aviation's management men in industry and in government. So swift has been the acceptance of this new-to-aviation journalism, that within its first year Aviation News has been accepted for membership in the Audit Bureau of Circulations.

To you Aviation News offers timely, direct and intensive coverage of the top men of the industry.

AIR TRANSPORT

• • • for intensive coverage of our swiftestgrowing transportation market.

In the span of less than 20 years a new, major transportation industry has been developed—bringing you huge new markets and marketing potentialities. Air transport has taken its place alongside the railroad, marine and automotive industries as one of our great public carriers of people and cargo.

Air Transport serves the builders and planners of this swiftly-growing industry—and serves them to the exclusion of all other interests. Among Air Transport's 10,000 paid subscribers you find the administrative heads, operation and line maintenance and overhaul executives, engineers, designers and their key supervisors and personnel—the financial and legal interests who back them—the military and government authorities who promote air transport expansion—the planners and builders of the \$800,000,000 program for airport and airway facilities—the transport manufacturing executives and the key men of thousands of manufacturing suppliers to the industry.

Within its first year, Air Transport has become the strong national voice of its industry. To the extent that air transport's key men have fully subscribed to its 10,000 paid (A.B.C.) circulation. This is a record of unusual significance (1) because circulation is carefully confined to airlines men, aircraft and parts manufacturing executives, military and government authorities and (2) because Air Transport's subscription price is \$5 a year rather than the traditional \$3

To you Air Transport offers direct and intensive advertising coverage among the builders of this specialized business.

McGRAW-HILL PUBLISHING CO., 330 West 42nd St., NEW YORK 18, N. Y.




YOUR COPY of "Aviation's 10,000 Key Men" is waiting. Write for it.



YOU'LL WANT all the facts. Ask for "The Builders of Air Transport."




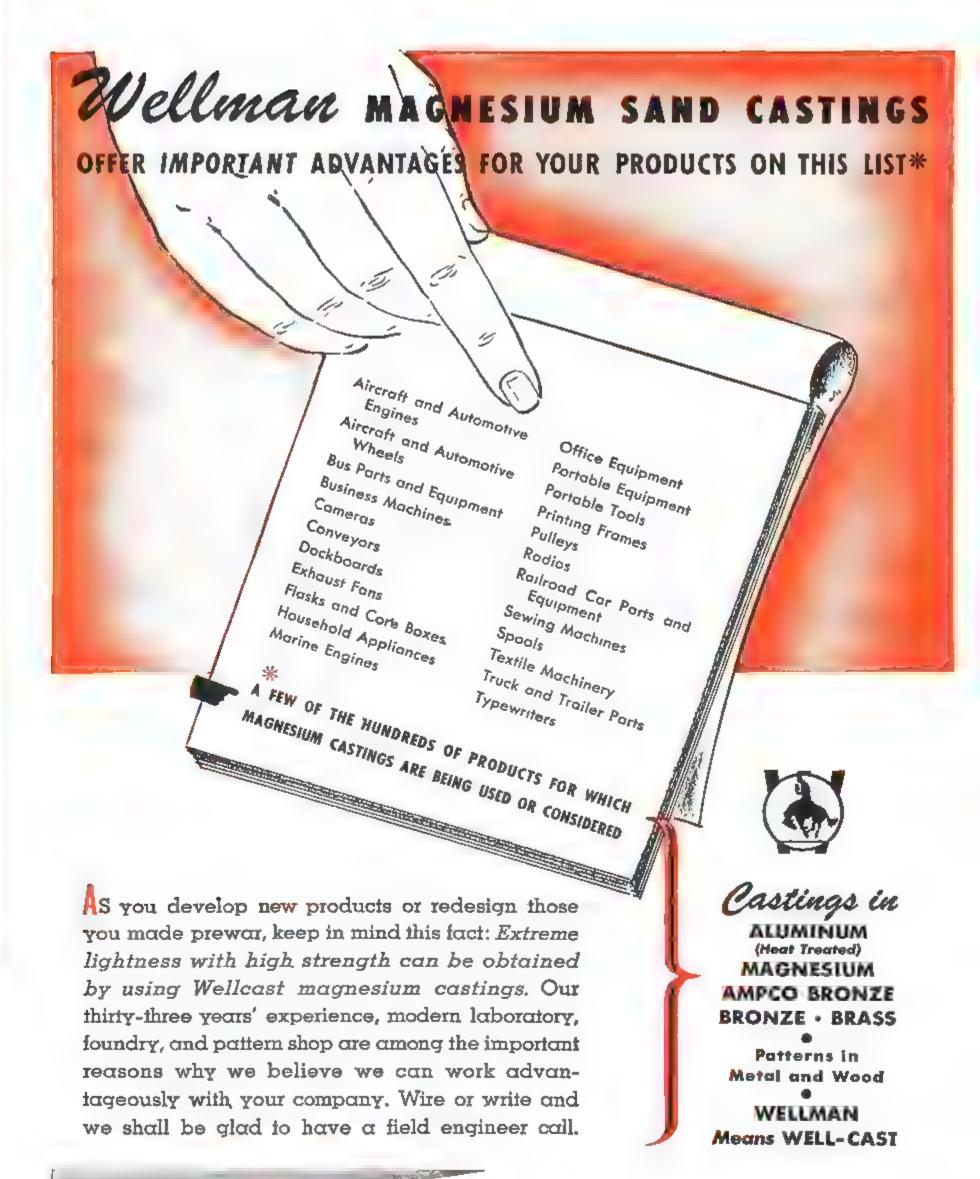



BRONZE & ALUMINUM COMPANY

REDUCES "BREAK-IN" TIME FROM HOURS TO MINUTES

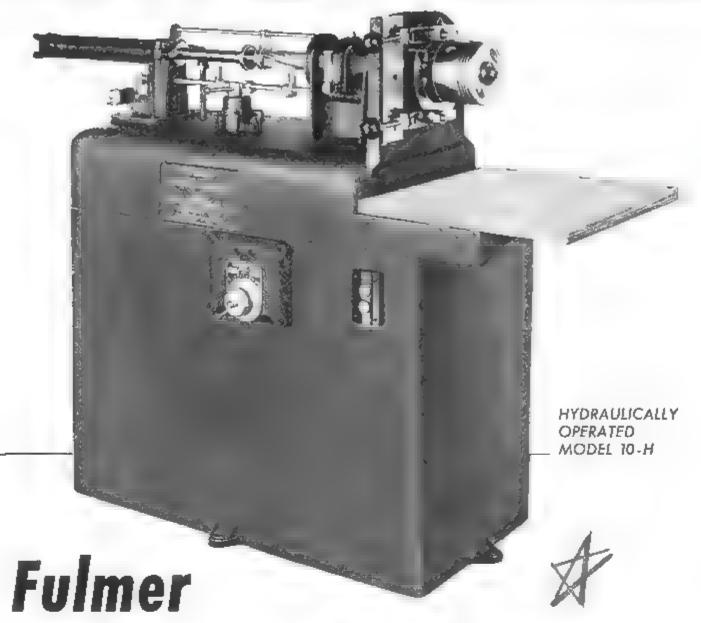

Piston Ring Lapper To "break-in" piston rings in an aircraft Only 10 to 25 strokes will lap in a con-

engine requires from 6 to 24 hours of test stand operation. The Fulmer Piston Ring Lapper reduces this time to a few minutes!

The hydraulically operated model illustrated is extremely flexible. It has a wide range of reciprocating speeds, extremely precise control and adequate power to handle the largest aircraft cylinders in use. The unit is self-contained with the base of the machine carrying the hydraulic tank, pump and motor.

The Fulmer Piston Ring Lapper is simple to operate. Widely used by the Army and Navy. Two models available: Model 10-H (illustrated above) for hydraulic operation and Model 10 for air operation.

ventional set of rings. No guesswork-

how rings fit the cylinders can be seen

before the engine is built up. No tearing

down engines because rings do not seal

properly. The engine can carry full

throttle from the start, with proper con-

Write Today for Complete Information

342

C. ALLEN FULMER CO.

1218 FIRST NATIONAL BANK BLDG., CINCINNAT! 2, OHIO

trol of oil,

V AIRCRAFT SERVICE EQUIPMENT

HONING MACHINES . PISTON RING LAPPERS . SPECIAL MACHINERY

Industrial Executive, **Engineer and Designer** should see this picture

- 1. A specially designed hydraulic machine forms metal bellows from one-piece tubes.
- 2. Fundamental applications of bellows are shown in animation...may suggest how you can profitably employ Sylphon bellows.
- 3. This portion of the film explains the operating principle of various types of temperature controls.

Simple as bellows are, words often fail to show the limitless design possibilities inherent in these versatile metal diaphragms. Too often many engineers have assumed that bellows only had application in a few fields, when actually they have been successfully applied to scores of designs in dozens of different industries.

Every


"The Story of Metal Bellows" is an interesting and informative sound film, vividly showing the basic application characteristic of a Sylphon Bellows. It shows just how a bellows converts pressure and temperature changes into controlled mechanical movement, and demonstrates graphically how this movement is harnessed to perform innumerable tasks.

This picture is one of the most thoughtprovoking industrial films ever produced. We are sure your organization will find

it stimulating. Let us know when it will be convenient to have this 28-minute sound film shown to your group, at no cost to you. 16 MM or 35 MM film

available.




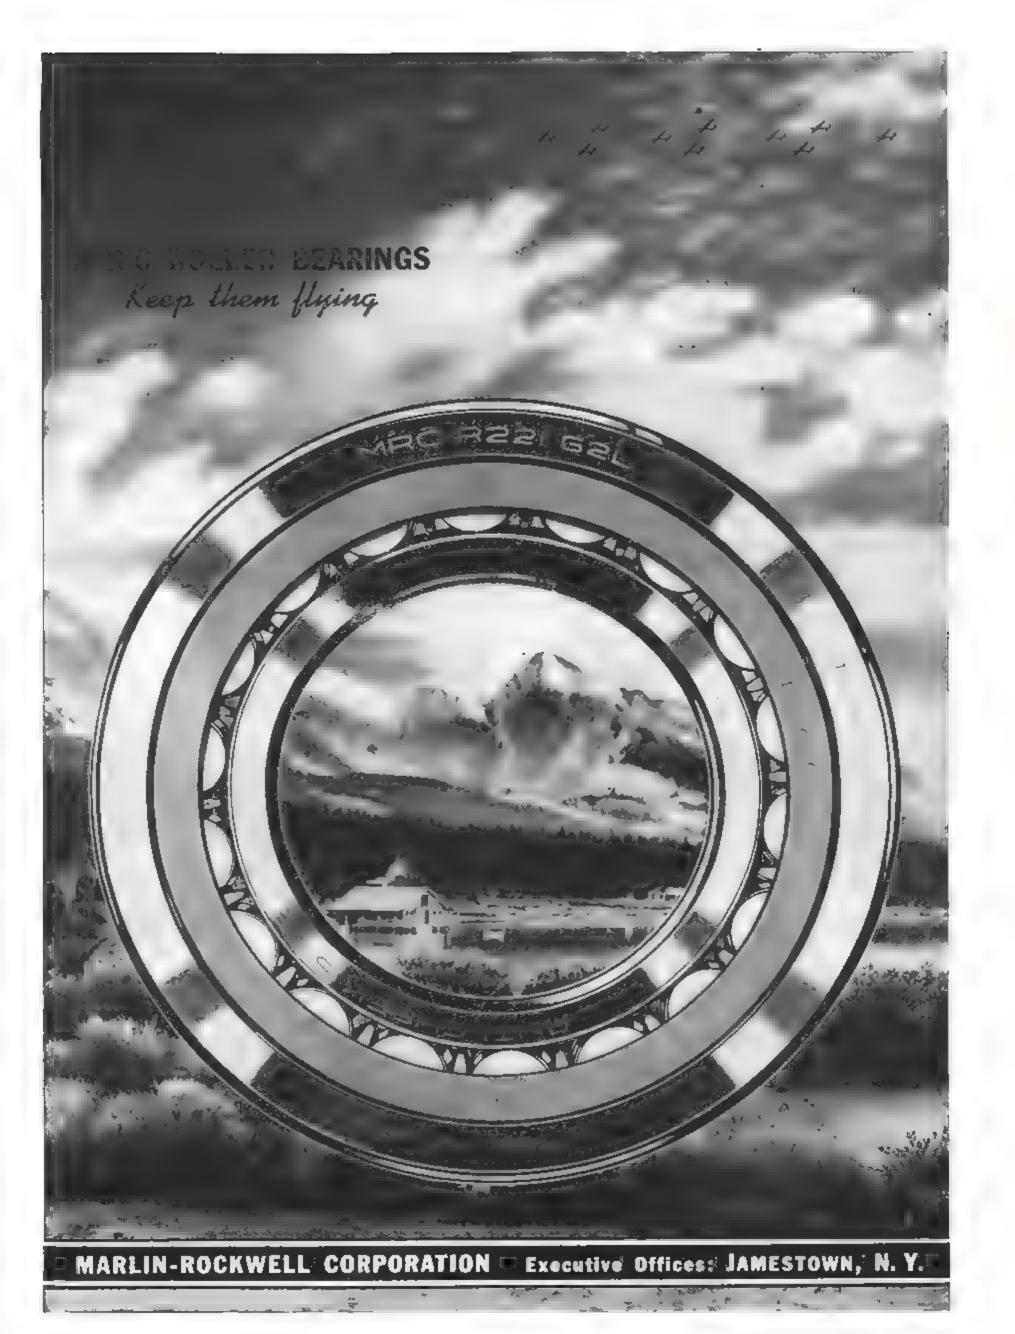

ENGINEERING FEATURES



NON-WELDED SADDLE



CORROSION RESISTANT



GREATER BAND STRENGTH





GREATER FLEXIBILITY



LIGHTER WEIGHT





IVE outstanding constructional features of "Aero-Seal" STAINLESS STEEL Hose Clamps are indicated above. The new mechanically interlocked saddle removes any doubts as to uniformity of welds at this vital point. Corrosion resistance is inherent with ALL-STAINLESS-STEEL parts. Stainless has greater tensile strength than carbon steel, producing greater band strength even though the band is thinner. The lighter, stronger stainless steel band has greater flexibility and the whole clamp is lighter in weight throughout with a gain, rather than loss, in durability and holding power. In addition, you get all the basic "Aero-Seal" features -- smooth and powerful

worm gear drive, compact housing, no loose parts, openable band, vibration-proof holding, wide range, long takeup, uniform pressure, no distortion of thin-wall tubing, and ability to hold high pressures without leakage. Remember - we originated the "Aero-Seal" design and offer you the further advantage of longest experience in the manufacture of this new and better type of hose clamp.

AIRCRAFT STANDARD PARTS CO.

1713 NINETEENTH AVE., ROCKFORD, ILLINOIS

Durable Paint Coats Require CLEAN-CONDITIONED SURFACES

DECARDINES have long been recognized

as ideal metal cleaners, their unusual merits as perfect conditioners have often been overlooked.

There is a grade of Deoxidine to meet your specifications for cleaning and conditioning.

The efficiency of Deoxidine is already well established: if you have not tried Deoxidine, the speed, economy, simplicity and effectiveness of its processes are easily demonstrated in your own plant and under your own working conditions.

AVOID PAINT FAILURES- Deoxiding cleans all metals, except zinc and cadmium, completely and destroys visible or invisible chemicals which, if permitted to remain, would cause premature paint failures-at the same time minutely etching and conditioning the surface, thus providing a most satisfactory bond for paint coats. In addition to properly preparing aluminum for painting, Deoxidine cleans it most acceptably in preparation for "Alrok"* coatings.

DEOXIDINES FOR VARIED USES-There are

types of Deoxidine for application with brushes, by immersion in suitable tanks or by spraying in power washers. Grades also of each of these types that adapt them to the removal of much or little rust and oil. There are processes worked out for the use of Deoxidine in large or small production and for big or little work.

The experience of ACP Laboratories and Technicians is at your service to advise the Deoxidine best suited to your needs.

* Reg. T. M. Aluminum Co. of Am.

Manufacturers of Inhibitors & Metal Working Chemicals



Note: West delivery to.

LER	777 (2) 57	PENNA.	Δί
	ants may address inquiries ich, Ltd., 728 East 59th St		A (

	nt Company, Ambler, Pa.
Peroline	Deoxidine
Name	Title
Company	
Address	





7E LOOK AHEAD to a nation of fliers. V Our youth will serve, as they always have, to keep America in the forefront of world aviation. Son will teach Dad.

With this growth, Safety will be a vital requirement. To see the runways, to be sure of the takeoff and the landing, to enjoy clear vision while cruising, Marquette Windshield Wipers will

help greatly toward safe flying and provide comfort to the pilot during inclement weather.

Many different models of Marquette Wipers are used on the aircraft of our Airlines, our Army Air Forces, and our Navy Air Forces.

Marquette wipers for future aircraft, including the planes of the private flyer, will be based on this experience.






PLAY SAFE! Specify

AIRCO-TWIN

THE MODERN "2 IN 1" HOSE FOR WELDING AND CUTTING



Airco-Twin Hose is strong and will withstand pressures many times greater than those required for welding and cutting operations. For easy identification in coupling, the acetylene line is red and the oxygen line is black.


OPERATORS PREFER AIRCO-TWIN HOSE BECAUSE.

- (1) It does not kink as do individual lines of hose.
- (2) It can easily be shifted about—less chance of entangling with other objects.
- (3) Compact—it is easier to keep out of the way of hot slag and sparks.
- (4) Saves time required to tape up individual hose lengths.

A further description of Airco-Twin Hose is available in our folder ADC 609-A. It can be obtained from the nearest Airco office, or if you prefer, address your inquiry to Department A, at the New York office.

* BUY UNITED STATES WAR BONDS *

In Texas: MAGNOLIA AIRCO GAS PRODUCTS CO. - General Offices: HOUSTON 1, TEXAS Offices In all Principal Cities

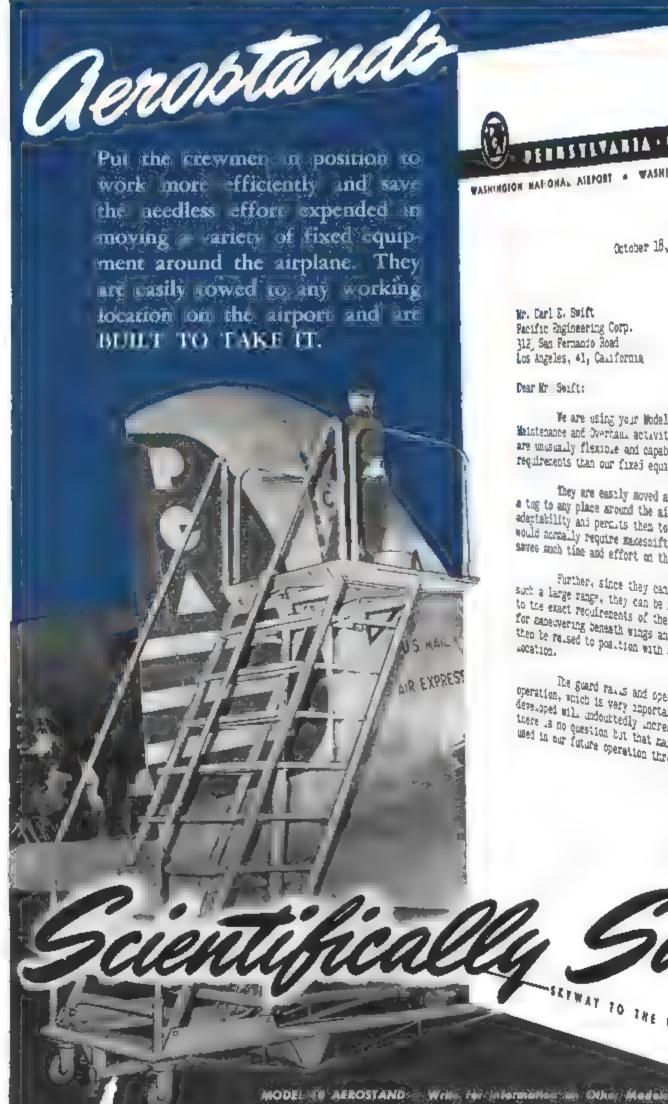

PERRSTLYARIA - CENTRAL - AIRLINES . WASHINGTON HAT CHAL ASERDST . WASHINGTON IS . DISTRICT OF COLUMBIA

October 18, 1944

Pacific Engineering Corp. 312 San Permando Road Los Angeles, 41, California

We are using your Wodel 10 Aerostands in our Airplane Maintenance and Overtain activities and have found that they are unusually flexione and capable of fulfilling many more requirements than our fixed equipment.

they are easily moved around the hangar or towed behind a tog to any place around the airport which further increases adentability and permits them to perform many functions that would acreally require macesouft arrangements. This flexibility saves such time and effort on the part of our personnel.

Further, since they can be raised and lowered through the transfer they can be loved into position and significant to the exact requirements of the joi to be performed and advanced for sacewering beneath wings and other low surfaces. They can then be reused to position with a minister are aminotes. The new


The guard rails and operating characteristics insure safe operation, which is very important. Her accessories now being there is no question but that many three of these units further and used in our future operation throughout our system.

PERSONAL TO THE AIGIDSA CILIER

PACIFIC ENGINEERING

DESIGNERS AND PRODUCERS OF SPECIAL EQUIPMENT

3123 San Fernando Road 🏺 Los Angelos 41, California 🐞 Telephone Albany [191]

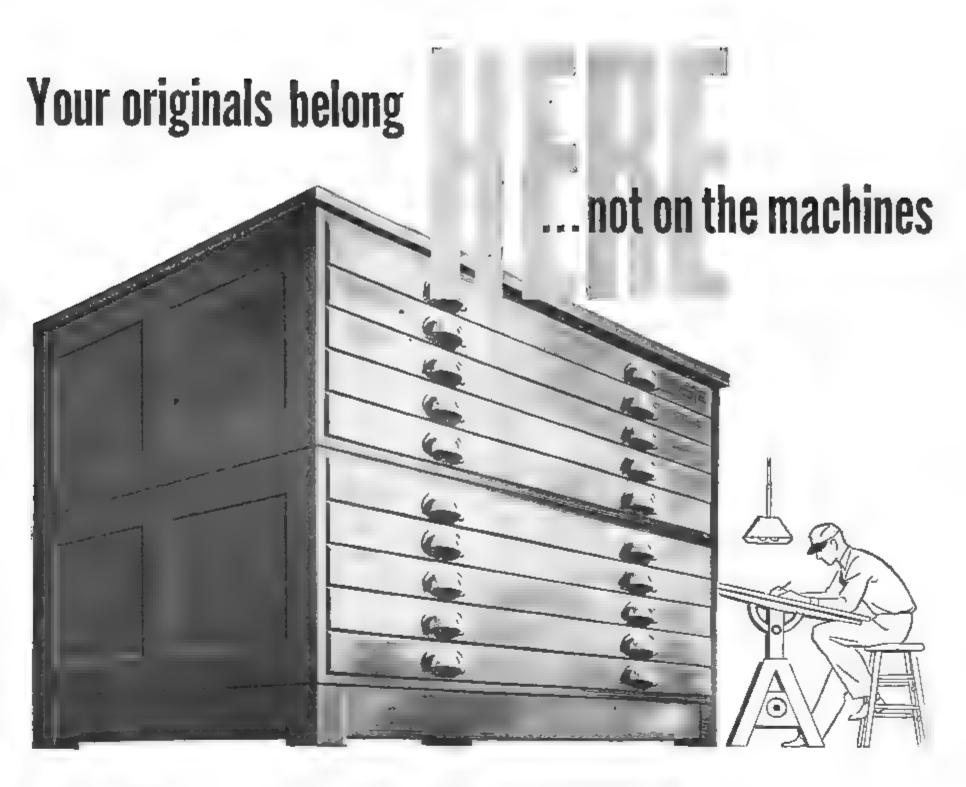

P ENCIL originals are precious, but even satisfactory shop prints. When they are from them get cloudier still.

So use your pencil originals only oncelines on PHOTACT Tracing Paper of Cloth. & Esser Co., Hoboken, N. J.

Then make all the blueprints, blue or when they are new they often give un- blackline prints or brownprint negatives you need from your PHOTACT Prints. They handled, they wear and blur. Prints made will be more legible than any made from the average pencil original.

For full information, write on your letterto make PHOTACT Prints with ink-intense head to PHOTACT Department, Keuffel




REPRODUCTION PAPERS AND CLOTHS





Drafting, Reproduction, Surveying Equipment and Materials Slide Rules. Measuring Tapes.





By effectively using natural air the paratrooper skillfully controls his speed and direction of descent. Compressed air, effectively used and properly controlled, does many tedious jobs for industry, saving time, labor and life or limb.

Air power is efficiently and safely handled with Schrader Air Control Products, a comprehensive line of modern air devices. Some of these products simply enable you to use air efficiently and conveniently, others boost production by eliminating slow operations. Still others reduce operator fatigue, or increase the safety of skilled fingers.

Whatever types of machines you are now operating, whatever you now make or plan to make after the war, you may be rewarded out of all proportion to cost by adding the power and versatility of air to new or war-worn machines.

For a specific example of the application of Schrader Air Control Products, look into the advantages of Schrader Hand-Operated Safety Control Sets, Foot-Operated Machine Control Sets, and Kick Press Control Sets. See your distributor or write to Schrader, Dept. H.



MADE BY THE MAKERS OF SCHRADER TIRE VALVES AND TIRE GAUGES



A. SCHRADER'S SON, Division of Scovill Manufacturing Company, Incorporated, BROOKLYN 17, NEW YORK



PROTECT SKILLED HANDS with Schrader Hond-Operated Safety Cantrol Sats. The compressed air operates the machine while operator's hands are kept at safe distance from the danger zone. Increase production by reducing four and fall gue. Adaptable



CHICAGO . DETROIT . ST. LOUIS . NEW YORK . HOBOKEN . SAN FRANCISCO . LOS ANGELES . MONTREAL

350 AVIATION Deem ber, 1944 AVIATION, December, 1944



OK'D BY X-RAY

Over every theater of war, skies are virtually darkened by overwhelming numbers of Allied fighters and bombers—tons of winged destruction attaining meteorlike speeds. In this air superiority lies the victory factor.


To determine absolute fitness of each vital part that goes into these fighting planes—insure stamina equal to the gruelling punishment they undergo—U. S. aircraft manufacturers depend on x-ray. Fast, accurate, and nondestructive—x-ray inspection provides visual evidence which can be correlated with physical tests—information of immeasurable value to aircraft designers and engineers. OK'd by X-Ray means that every essential casting and weldment is completely free of sub-surface defects—assures the world's best flying men the world's best fighting aircraft.

A complete line of G-E Industrial X-Ray Units is available—types to meet every aircraft inspection requirement. For complete information as to which unit is best suited to your needs, write or wire, today, to Department N812.

Inspection of propeller blades with a G-E Industrial X-Ray Unit anabled one plant to reduce inspection personnel almost 50%—releasing essential workers for other vital jobs within the plant.

Today's Best Buy 10 4. S. Was Bonds



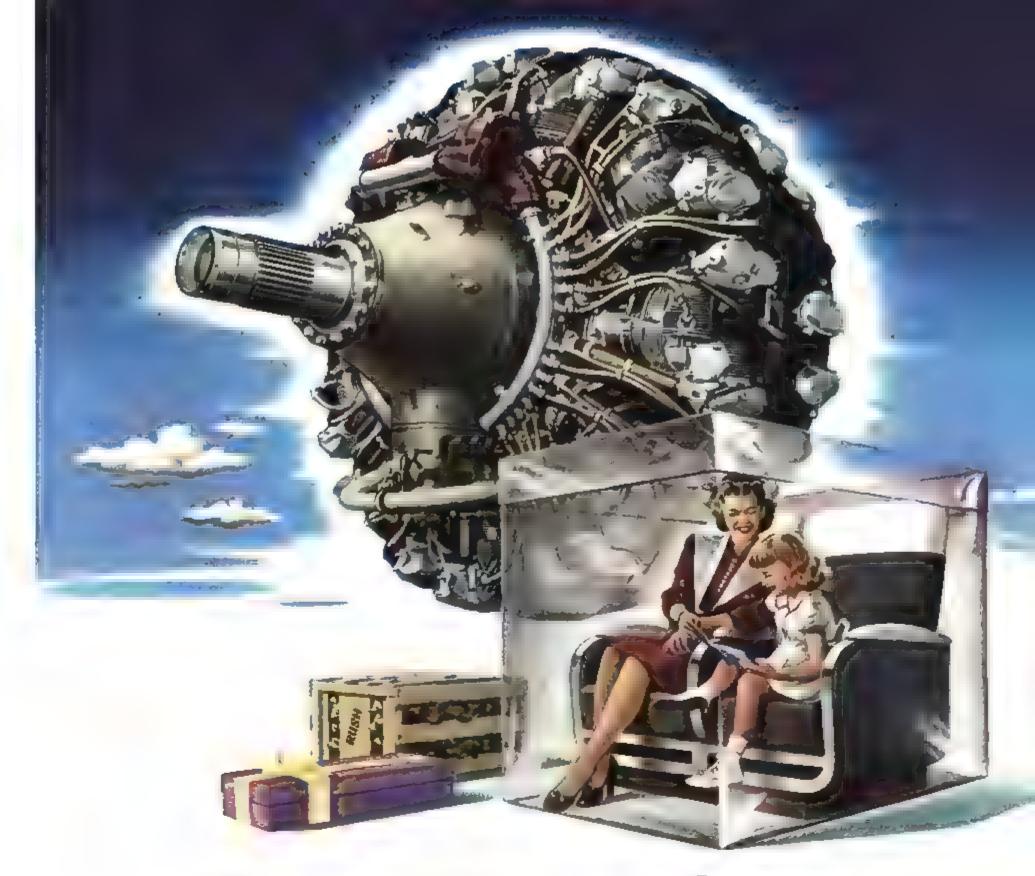

Faster and Fresher via Cyclones

Transportation of perishables by air becomes a highly interesting prospect as ton-mile costs shrink. Yet no commodity under consideration is so perishable as human vitality, which on extended trips wilts like lettuce or gardenias.

Faster, Cyclone-powered air transport gives passengers a wide travel advantage in distance covered before fatigue sets in. With still higher standards of commercial speed in sight for tomorrow, transportation to any part of the world will be possible with maximum saving of passenger vitality.

The accepted high-power engine for super-speed transport in such installations as the Boeing Superfortress, Lockheed Constellation, Curtiss CW-20E Commando and Martin Mars is the Cyclone 18, with a rating of more than 2200 horsepower. True to Wright tradition, the smooth-running Cyclone 18 is thrifty of fuel and maintenance, and offers operators a payload bonus of two extra passengers over comparable power plants. Wright Cyclones pay their way,

Cyclones Save 3 Ways

LESS WEIGHT—MORE PAYLOAD LOWER FUEL CONSUMPTION REDUCED MAINTENANCE




Aircraft Engines

Wright Aeronautical Corporation

4 Division of Curitis-Wright Corporation

Paterson, New Jersey, USA

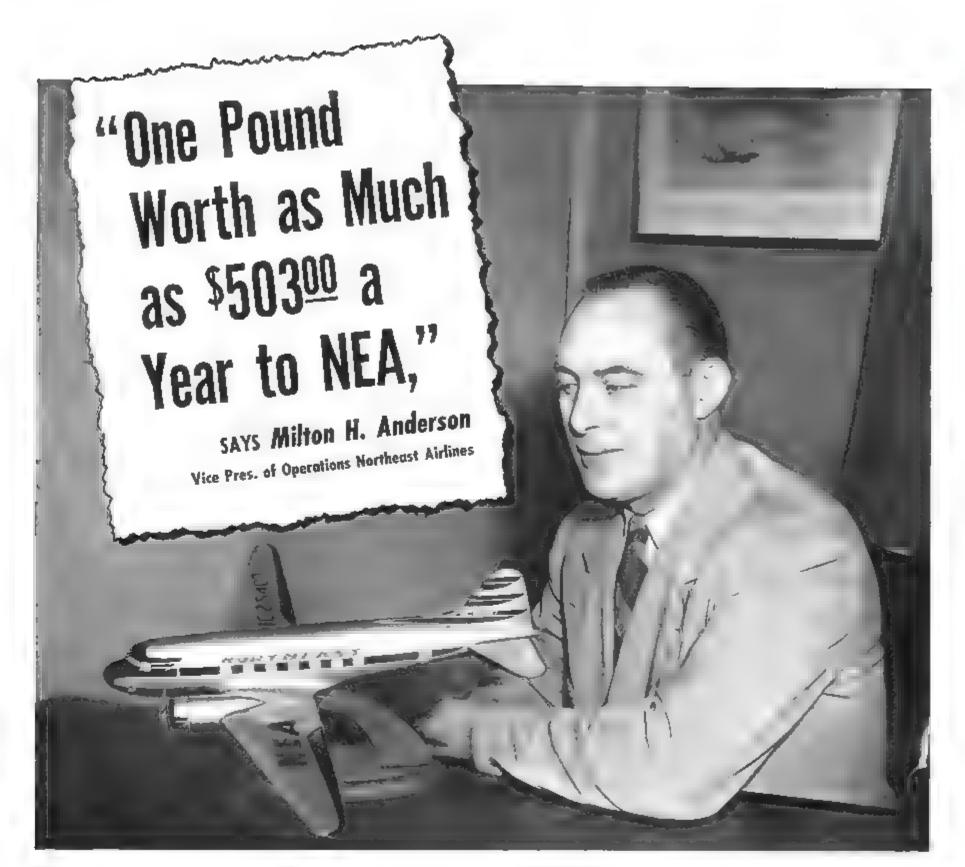

Our experience in New England over a period of years emphasizes the value of every pound of mcreased pay load. Each pound of unnecessary weight saved can mean that much more for passengers and cargo. For example, one pound of . Wartime standard nats on all types of excess weight on the Boston-New York run, operated with 24-passenger DC-3's on hourly schedules, could cost Northeast as much as \$503.00 a year."

Boots Nuts Save Up to 60 Lbs. Per Plane

BOOTS STEEL ANCHOR NUT

(W25 - 8-32) The comparable fibre nut is 151 2%, heavier than this all-metal, steel telf-locking out

Send for Free Weight-Saving Backlet

Actual weights of over 250 defferent seif looking auts used in aircraft, comprel ensisely re-

viewed for the convenience of aircraft designers, engineers.

operating and maintenance per sonner Copy will be sent you,

free, on request.

- Lighter Tougher, Boots step up cargo capacity
- Meet all specifications of government aviafron agencies.
- · Standard fastenings on ad post-war commerejai ships.
- planes it gliters, laumbers, transports
- · Can be used again and again-yet selflocking grip never sups
- * Outlast the plane

Motion Picture -- "All Work And NaPlay" -- 16 mm sound-30 minutes. Write for information.


SELF-LOCKING NUTS They Fly With Their Boots On_Lighte

Boots Aircraft Nut Corporation, General Offices, New Canaan, Cann., Dept. 1

Another -fluid heat Aircraft Heating Achievement . . .



Fluid Haat's Model SRH-100. Output. ,00,000 BTI per hour, weight only 24½ pounds. Diameter is 9 inches, length 27 mehes. Model SRH-50, delivers 50 000 RTU, weighs but 16 pounds, 10 ounces, measures 61/2 inches by 20 taches. Weights include all controls and accessories. Blowers available for ground operation, with transfer between flight and ground phase automatic



Fluid Heat's Model STH-15. Proportionately light-weight and compact, this model delivers 15,000 BTU per hour. All controls and accessories included, it weighs only 8 pounds. Dimensions are 3 inches by 5 inches by 18 inches. Used to defrost windshields and heat fighter-plane cockputs. THOUGH it delivers 15,000 BTU per L hour under flight conditions, Fluid Heat's Model SRH-15 Aircraft Heater weighs only 6 pounds, 14 ounces, complete with all controls and accessories. Ideal for single and two-place airplanes. Blower is available for ground operation. Transfer between ground and flight phase is automatic, assuring continuous service.

Built around a new heating principle of special advantage in aircraft heating, this super-light heater employs a vaporentraining process utilizing pre-heated combustion air. The process accomplishes combustion with an unusually low pressure drop, permitting operation at low ram pressures. It produces a completely suspended fire and therefore gives freedom from lead oxide formation. Flame retention is so positive that flame characteristics are the same from sea level to ceiling. Automatic compensation assures high combustion efficiency at all air speeds.

The same characteristics and outstanding lightness feature all models of Fluid Heat's complete line of aircraft heaters.

The 100,000 BTU unit, for instance, weighs but 241/2 pounds. The 50,000 BTU unit weighs only 16 pounds, 10 ounces. These weights include all controls and accessories.

Fluid Heat has, for sixteen years, led in the development and manufacture of autometic combustion and heat transfer equipment. Those years of heat engineering know-how are built into each light, compact, efficient Fluid Heat Aircraft Heater. You will want Fluid Heat Aircraft Heaters on planes you design, build or equip. Write for full information on this new heating achievement,

FLUID HEAT DIVISION Anchor Post Fence Co.

6750 Eastern Ave., Baltimore 24, Md.



EASIER, FASTER, LOWER-COST TOOLING

The combination of Fiberglas and specially developed, low-pressure resins has resulted in a material with many unique and mechanically important characteristics. Lightness, rigidity, dimensional stability, high impact strength and ease of fabrication are among the advantages particularly significant in the production of Fiberglas-reinforced plastic dies, jigs and fixtures.

The high cost of manufacturing metal dies is eliminated. Costly, time-consuming machining is avoided.

FABRICATING FIBERGLAS-REINFORCED PLASTICS

One of the techniques developed, by Douglas Aircraft engineers, for the fabrication of Fiberglas-reinforced plastic jigs is illustrated at the right:

No. 1. The male mold (or, if available, the actual part), backed with plaster of Paris, is placed on a corrugated metal table equipped with air valve for producing vacuum.

No. 2. The form block is covered with cellophane to prevent resin from sticking to the mold. Then the Fiberglas cloth laminations are trimmed to fit the form block... the low-pressure resin is rubbed into the cloth and the desired number of layers are built upon the form block.

No. 3. A rubber blanket is stretched over the mold.

No. 4. Air is evacuated. As the pressure is increased excess resin and air pockets are squeezed out of the laminates. The table is then rolled into the oven to complete polymerization of the resin at about 180° F.


No. 5. After curing and cooling, the form block is removed, flanges are trimmed, holes drilled, clamps installed to complete the tool.

All available fabricating data and additional information about Fiberglas products and Fiberglas-reinforced plastics will be furnished on request. Write: Owens-Corning Fiberglas Corporation, 1891 Nicholas Building, Toledo 1, Ohio. In Canada, Fiberglas Canada Ltd., Oshawa, Ontario.










Steps in the production of a 11g for spot-welding airpiane doors. Fiberglas-reinforced plastics are dimensionally stable, have extremely high impact strength and are nonconductive of electricity.

Photos courtesy Douglas Aircraft Co , Inc

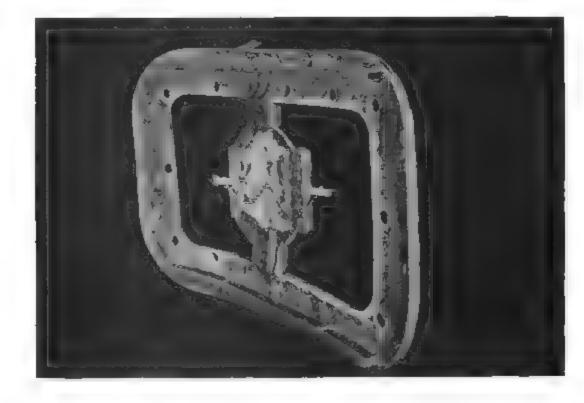



FIBERGLAS .. A BASIC MATERIAL



YOU see, that's our business . . . building things . . . all sorts of things.

Jones & Lamson is the oldest machine tool company in America and there is literally no industry (and few important products) to which Jones & Lamson engineering has not contributed, both in war and in peacetime production.

So you dream it . . . we'll help build it.

We'll draw up complete production specifications. We'll engineer the tooling. We'll specify, design, and create any special machine tools needed. We'll even plan the plant and its equipment.

You dream it.

We'll help build it . . . from the ground up, if need be.

These engineering facilities will become available to you as soon as conditions permit. Meanwhile, we solicit your inquiries.

JONES & LAMSON

MACHINE COMPANY
Springfield, Vermont, U.S.A.



Manufacturers of: Universal Turret Lathes • Fay Automatic Lathes • Automatic Double-End Milling and Centering Machines • Automatic Thread Grinders • Optical Comparators • Automatic Opening Threading Dies and Chasers.

AVIATION December 1944 AVIATION, December, 1944



SOUTH MERIDEN CONNECTICUT, U. S. A. CHANDLER-EVANS CORPORATION



CLEVELAND Top Quality FASTENERS

The Cleveland Cap Screw Company

2945 EAST 79TH STREET . CLEVELAND 4, OHIO

ALLOY AND AIRCRAFT PARTS DIVISION

MADE BY THE ORIGINATORS OF THE KAUFMAN PROCESS FOR GREATER STRENGTH AND ACCURACY



We are glad to announce that VARD INC. is now manufacturing electrically powered, mechanical actuators for aircraft.

This addition completes our line, as we have built hydraulic cylinders, valves, switches and fluid actuators for several years.

We are able with the facilities of our own foundries, machine shops, thread grinding, gear generating, honing and plating departments to produce these mechanical actuators almost in toto. Steel tubing, screws, wire, bearings and motors are the parts we do not make.

VARD facilities are always available to help design and build your special aircraft requirements.

MECHANICAL ACTUATORS



Now Manufactured by . . .



A BIG STAND FOR BIG JOBS

(SERIES 9 STAND)

High as a Dirigible -- Low as a Trainer -- For One or a Dozen Mechanics



With the addition of 3 foot intermediate sections the Series 9 Airepair platform height can be increased to 25 feet high enough to service a blimp or a dirigible. How can a mechanic be expected to do careful, accurate service and repair jobs standing on boxes and oil drums or rickety home-made stands? The Airepair line of factory-made stands are engineered and built especially for aircraft repair. Roomy, rigid, and portable, they are more serviceable than a "ladder" and require no maintenance. Heavy engine parts can be repaired right on the platform. The prop well permits checking and timing valves without the necessity of pulling the engine. More Airepair Series 9 Stands are now used for servicing the larger type planes than any other stand. Airepair is truly a generous stand for Big Jobs.



Wolfe & Mann_ MANUFACTURING COMPANY

AIRCRAFT EQUIPMENT DIVISION

28TH AND SISSON STS. * BALTIMORE 11 MD.



Vista, California. Integral Fuel Tanks in these giant ships, the largest mass-produced plane in Navy service, are sealed with Presstite sealing materials using the Rohr Tank Seal Process. This method of sealing integral tanks, developed by Rohr Aircraft Corp., using these

proven Presstite materials, represents the latest development in sealing tanks in large transport, cargo, and similar type planes.

Meeting the complex sealing requirements of the aircraft industry is only one example of Presstite's ability to originate and develop sealing compounds for specific requirements.

If your product or your manufacturing processes call for sealing or coating compounds, send your requirements to sealing specialists. We'll gladly work with you and your engineers in suggesting the most effective compounds to fit your needs.



PRESSTITE ENGINEERING COMPANY, 3910 Chouteau Avenue, St. Louis 10, Missouri

A Partial List of Industries for Which Presstite has successfully Developed Special Sealing Compounds:

For the Aircraft Industry:

Sealers for Integral Fuel Tanks Fuselage Seams Drop-off, Expendable Fuel Tanke Gun Turrets Synthetic Glass

AVIATION, December, 1944

Instruments Intercoolers Air Ducts Insulating Dissimilar Mctals

For the Refrigeration Industry: Sealers for Domestic and Commercial Refrigerators

Seaplane Floats

Bonding and Scaling Low Temperature Insulation in Refrigerated Rooms

For the Railroads:

Sealers for Insulating. Soundproofing and Weatherproofing of Railway Cara-Sealing Car Windows and Spot Welded Seams

For the Building Industry:

Roof Coatings, Caulking, and Waterproofing Compounds

For the Shipbuilding Industry

Insulation Adhesive and Sealers - Rust Preventive Compounds

For the Automotive Industry: Special Adhesives and Scalera.

Far the Construction Industry: Sealers for Jointing Sewer Pipes Sealers for Waterproof-

ing Excavation Work

Miscellaneous.

For Glazing Greenhouse Windows Extruded Caulking

Compounds Ammunition Paints Plus Many Special Products for the

Army and Navy

Our Engineering, Technical, and Laboratory facilities are at the service of any industry with a sealing problem,

Keep Your Production **Machines**



in Line... Like bombers running over their target



...keep them under VEEDER-ROOT "COUNTROL"

Daily production steers steady as a rock, straight in to its target of on-time shipments, when all machines in all production lines are kept under Veeder-Root "Countral." For "Countrol" is based on the facts in figures continuously supplied by Veeder-Root Devices on the performance of all machines and processes . . . figures which indicate whether capacity is being maintained, so that any needed adjustments may be made immediately.

Any aircraft orengine manufacturer can get Veeder-Root Counting Devices now, for electrical or mechanical operation on any machine, to speak in any language: turns, strokes, pieces, trips, lengths, volumes or any other units desired. And Veeder-Root "Countrol" is quick, easy, and mexpensive to install, without interrupting production. Find out how it can help your production to count for more than ever before

VEEDER-ROOT INC.

Hartford 2, Connecticut

In Canada Veeder-Root of Canada, Etd., Montres! In England: Veeder-Root Ltd. (new address on request)

AN APION Desember, 19:4




 Geared to the precision demands of war, Chicago Wheels have been a potent force in smashing bottlenecks -cutting down rejects-speeding production to an alltime high.

Constantly tested, constantly improved—Chicago Wheels produce finishes so perfect they pass exacting surface analyzer tests, so accurate they can be measured in micro inches.

Production of civilian goods will demand the same precision finishing methods.

Keep pace with Chicagos, the Wheels of Progress!

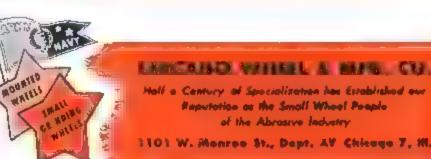

CHICAGO GRINDING WHEELS

Anything up to 3th in diameter in various grains and bonds, including FV, the sensational new bond with a pedigree.

CHICAGO MOUNTED WHEELS

Shapes and abrasive formulas to take care of every job of internal or external finishing.

TRY ONE FREE!

So you'll know what they can do, we will send a test wheel. Tell us material you'd like to finish and size wheel required. _____AyJ2____

Mounted Wheels.	Send Test Wheel. Size	
Mame		



with this New Steerable

Tor Many Years, Firestone Tires have been the ance. Beyond the controlled steerable range, simple

For many years, Firestone Tires have been the standard of safety for aircraft on the ground. Now, Firestone makes another contribution to greater ground reliability—a new steerable tailwheel strut assembly for light planes. It has a solid tire vulcanized to a plastic hub. Sealed-in lubrication requires repacking only at major overhaul periods. Tapered roller bearings carry vertical loads in the strut and in the wheel. Needle roller bearings in both strut and wheel take side thrusts. The steering mechanism has 75% greater cam area to insure maintenance-free perform-

ance. Beyond the controlled steerable range, simple rudder pedal operation permits automatic free swiveling action without gunning the engine or applying brakes. Throughout the entire steerable range, steering is positive and independent of tension in the rudder control connectors. The complete assembly is light in weight and low in price and the entire assembly or wheel only can be interchanged with present original equipment units. For prices and additional data write, wire or phone Firestone Aircraft Company, Akron, Ohio; or Los Angeles, California.

AVIATION, December, 1944

"ON A DIME Tail-Wheel

The bearings designed into this new assembly are the direct result of test experience with tailwheels made to comply usth specifications of the United States Navy for carrier-hased fighters. This is but one example of the quality of design and materials bush into this newest Firestone Aircraft product.


Por the best in muser, lesten to the "Voice of Prestone" with Rechard Crooks and Gladys Swarthout and the Perestone Symphony Orchestra conducted by Howard Barlow every Monday evening over NBC network.

Copyright, 1944, The Firestone Tire & Bubber Co.

FIRESTONE AIRCRAFT COMPANY AKRON. OHIO - LOS ANGELES CALIF.

THE PARTY PROPERTY OF THE PARTY OF THE PARTY

MAKERS OF LIAMRS VELON MIRCRAIN SUPPLIES

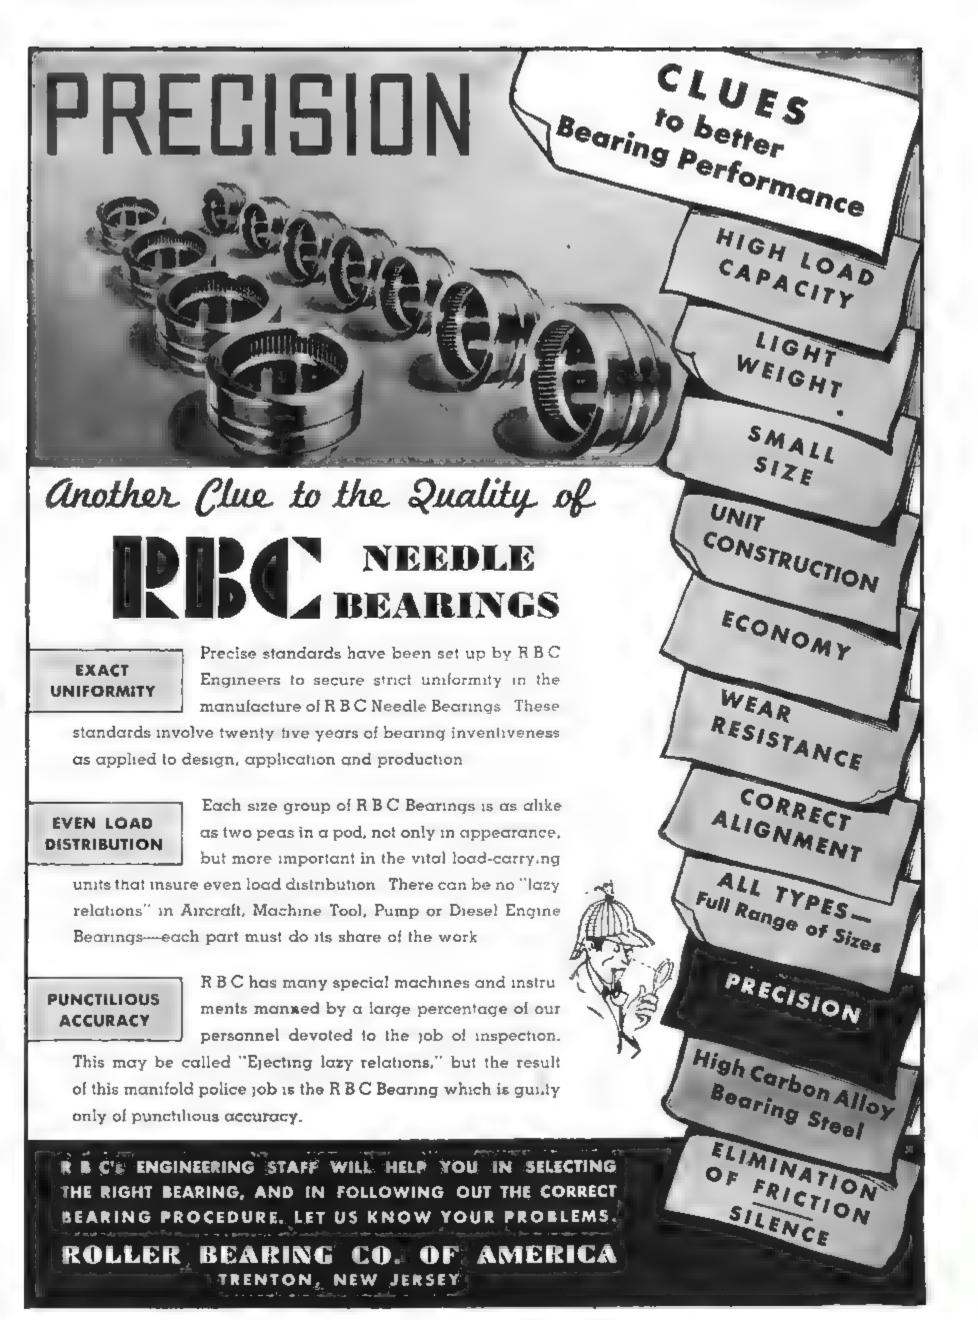



No matching wits with Messerschmitts, no bombing missions fraught with mischance and flak, no daring deeds that merit decoration, but a significant story in smudged service records.

With the war under way the AAF picked the Jacobs engine for twin-engine trainers to school the bomber pilots and bombardiers.

A pre-war engine, developed during the Depression years, the Jacobs had proved itself a simple, rugged engine that stood up for long periods in all kinds of work and weather, with little maintenance. No government money went into its development. Ready for production, thousands were ordered.

Army as good for 350 hours of flight time between major overhauls—long service shift for an engine handled by student pilots, taking more take-offs and more time at full throttle than engines used in any other type of flying.

As the flight hours piled up, it was found that the Jacobs was good for more than 350

AVIATION, December, 1944

hours; and the service period was extended again and again. Today, the service period of the Jacobs is as high as 1,200 hours—equivalent to 180,000 air miles of flight, not counting taxiing, and ground time.

Because it delivered more than three times the original specified service hours, the Jacobs not only speeded up training schedules, but also saved the AAF and the taxpayers millions of man-hours in shop time and maintenance.

Built to work, built to last . . . the Jacobs will mean more in peace than in war—when safety and low costs are essential to commercial flying.

The engine also certifies the ability of Jacobs to put extraordinary value into precision-built mechanisms... stands as a reliable guaranty of value on any product that will carry the Jacobs name plate. Watch for it, and you won't go wrong!... Jacobs Aircraft Engine Company, Pottstown, Pennsylvania.

JACOBS . Pottstown, Pa.

Aviation Maintenance Engineers

look like this . . .



because

parts made of HYCAR have these ...



RESISTANCE TO GASOLINE AND OIL

Hycar's resistance to petroleum products means that parts made from Hycar—gaskets, seals, hose, accumulator bags, and others that are exposed to petroleum products—won't swell, won't absorb petroleum and take on extra weight. Dimensional stability is assured. Maintenance and replacement time is practically eliminated.



RESISTANCE TO COLD AND HEAT

Hycar compounds can be made to operate in temperatures as low as -65° F. or as high as 250° F., maintaining elasticity and resilience at the low temperatures, refusing to soften at the high. Parts last longer—little or no maintenance required.



RESISTANCE TO ABRASION

Abrasion resistance is considerably better than natural rubber and most other synthetics. Wear—and hence maintenance—is negligible, even in severe service.

RESISTANCE TO COLD FLOW OR CREEP

Even at elevated temperatures parts made from Hycar have a minimum tendency to cold flow or creep after they take permanent set from the applied loads. Hycar stays on the job—maintenance time goes down.



LIGHT WEIGHT

The specific gravity of crude Hycar is 1.00, 15% to 25% lighter than many other synthetic rubbers. Correspondingly lighter in compounded forms, Hycar parts reduce overall weight, permit more efficient operation.

THESE AND OTHER PROPERTIES OF HYCAR,

such as high tensile strength and good elongation, may be had in a wide variety of combinations to meet specific service conditions. Thus the right part for the right place can be obtained. And when the part is right, maintenance becomes a very minor problem. If you need help in solving your individual application problems, just write our Technical Service Staff. Hycar Chemical Company, Akron 8, Ohio.



LARGEST PRIVATE PRODUCER OF SUTADIENE TYPE

Synthetic Rubber

Free-write for your copy of the new pocket-size Hycar Glossary of commonly used synthetic rubber terminology.



The Greater Safety, Convenience and Economy of Post-War Aviation Must Be Planned TODAY!

Today's flight of the imagination will be the commonplace of tomorrow—and we at AIR COMMUNICATIONS believe that now is none too soon to plan for the great "Air Age" ahead. That's why AIR-COM engineers are busy adapting the science of electronics to air communications to serve aviation today and tomorrow.

Precision-built AIR-COM Products continue to serve America in the warplanes that are blasting open the road to victory.



The war's end will find these tested and proved AIR-COM Products — together with other AIR-COM developments — ready to assure greater safety, Tonvenience and economy for all types of private planes and for the giant commercial freight and passenger transports of the air.



Cooperative Engineering Available-AIR-COM engineers have the "know-how" and experience. Let us help you solve your engineering problems of the future.



AIR COMMUNICATIONS, INC.

KANSAS CITY 8, MISSOURI

Designing. Enginneering and Building for Victory...and the Future



...To Engineer A New Product!

This little self-locking nut plate is typical of Solar's challenging spirit which, fifteen years ago, brushed aside tradition to give the world the first really safe method of venting dangerous airplane gases-the Solar stainless steel exhaust manifold.

Two years ago there was a desperate need for self-locking nut plates for military plane production which would sustain high temperatures. Solar met the emergency with SOL-A-NUT ... a stainless steel

nut plate developed with Solar initiative on different principles of design and construction

SOL-A-NUT is simplicity itself - now that it is finished. But back of it are months of hard work and original thinking - of research and design - of material tests-trials in use-re-design and further tests.

It is not a simple matter to engineer new products, particularly those made of stainless steel and used where high temperatures prevail, or hot gases, acids and corrosion are encountered. This is the field in which Solar's experience and knowledge are

> at their best. Consult Solar on your problems. Address "Management".





There's a new way to kill fire on the Glenn L. Martin JRM-1. For the first time production models are being equipped with built-in methyl bromide extinguishing systems. Walter Kidde & Company is proud to have scored this important first on the new production model of the great


Methyl bromide, the new Kidde fire-killer, is a vaporizing liquid type of extinguishing agent which is extremely fast and effective against engine fires. Another important feature is the system's extreme lightness in weight . . . considerably less than other types of built-in systems. The new Kidde system is simple in design and operation.

For many months Kidde engineers have been busy in the development of a methyl bromide method, now perfected. This is not just an extinguishing system for the world's biggest seaplane. This new Kidde equipment means a new step forward in air safety!

Methyl bromide fire extinguishing gives great promise for today's military planes and commercial air transports. Walter Kidde & Company is prepared to discuss installation and performance data with interested manufacturers. Write us, on company letterhead, for full details on this new extinguishing method.



WALTER KIDDE & COMPANY, INC., 140 CEDAR STREET, NEW YORK 6, N. Y.

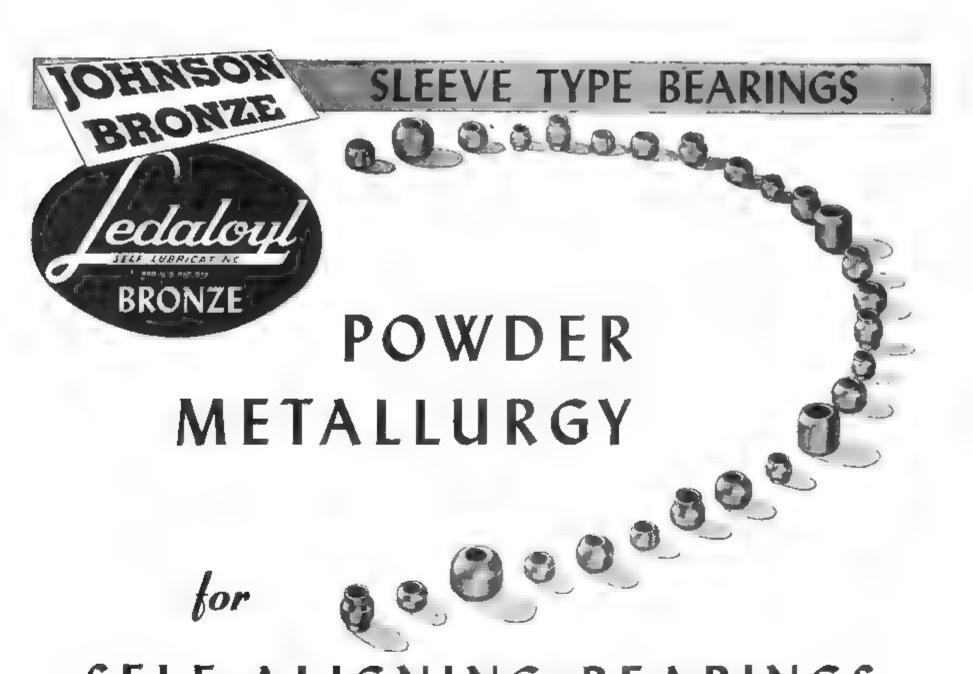

SELF-ALIGNING BEARINGS



BEARINGS

Cast Branze Bearings
Cast Branze Graphs ed
Sheet Branze Bearings
Sheet Branze Bearings
Sheet Branze Babbilt Bearing
Steet and Brabbilt Bearings
Seet and Branze Bearings
Cedatoys
Self-Lubrica ing Bearings
Electric Motor Bearings
Automobile Bearings Automotive Bearings Branze Bors Branze Castings

Any Type

Any Size

Any Quantity

 Before the development of the science of powder metallurgy, the many advantages of self-aligning bearings were often outweighed by the extra cost involved in producing them. This was due in great part by the intricate machining operations necessary. Now you can secure self-aligning bearings made from Johnson LEDALOYL Bronze . . . the newest development in powder metallurgy. This method of making bearings eliminates all machining, provides accuracy, and adds the extra advantage of self lubrication

Designers of products for the future will do well to consider the use of Johnson LEDALOYL Bronze. This is true not only for bearings but for other small, intricate parts. Johnson LEDALOYL is made from pre-alloyed bearing bronze, and parts properly designed and installed will usually outlast the motive unit. In some cases, the self lubricating quality enables manufacturers to seal the bearing in place, thus eliminating the necessity of further lubrication and lubrication fixtures.

A Johnson Sales Engineer will gladly help you decide which applications you have that are best suited for LEDALOYL There is one located as near as your telephone. Why not call him in -TODAY?

DISTRICT SALES OFFICES: Atlanta · Boston · Buffalo · Chicago · Cincinnati Cleveland Dallas Detroit Kaneas City · Los Angeles · Minneapolis · Newark New Castle · New York · Philadelphia Pittsburgh . St. Louis . San Francisco . Seattle

620 S. MILL STREET

NEW CASTLE, PA.








INSTRUMENT CO. INC.

HUNTINGTON, L. F

NEW YORK

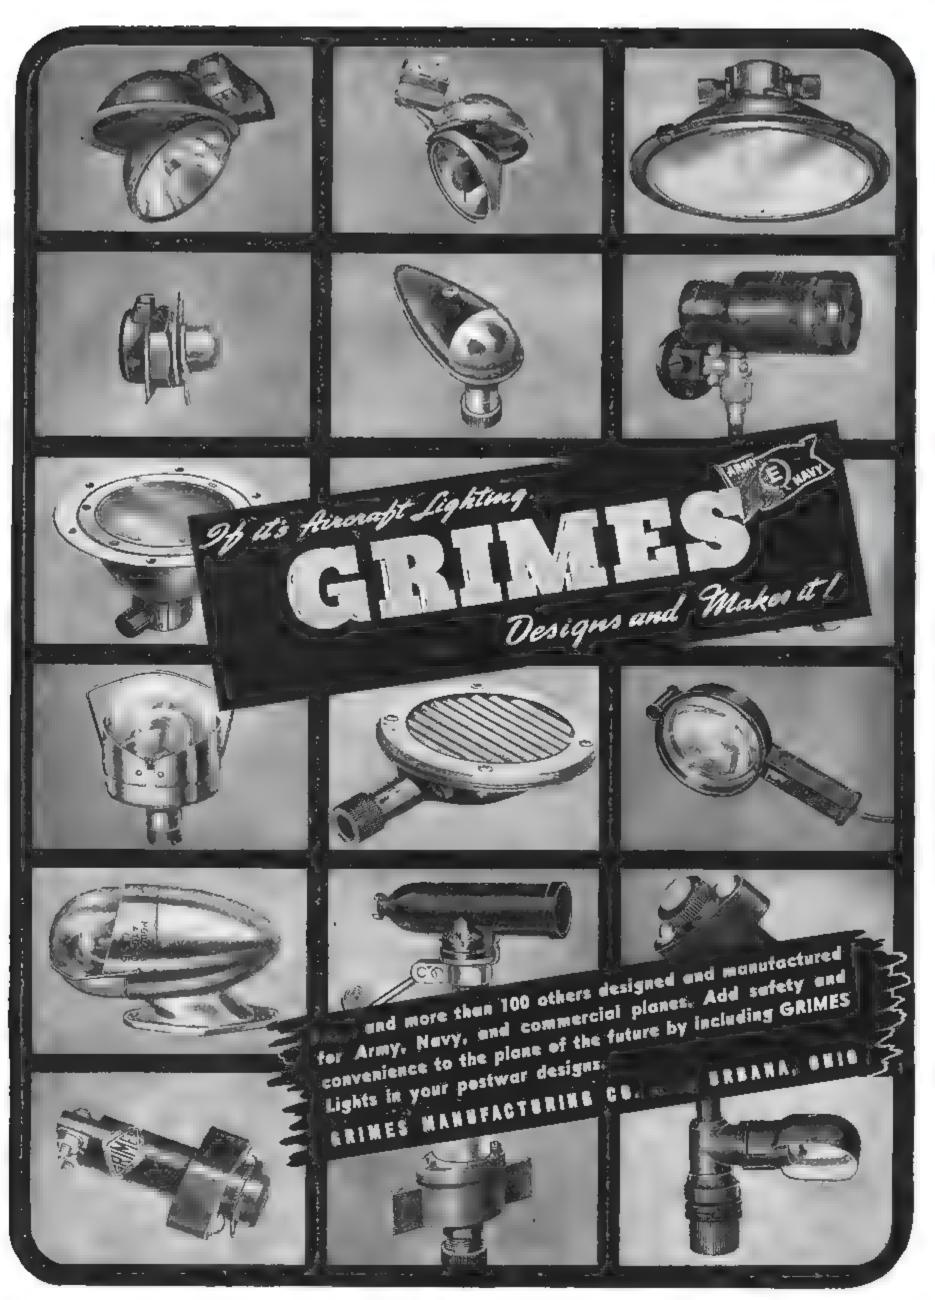



—and right now is the time to learn all about Republic ELECTRUNITE Aircraft Tubing and what it can do for you.

The table above, giving ELECTRU-NITE analyses, sizes, and gauges demonstrates the wide line of topquality tubing available from a single source of supply—Republic Steel and Tubes Division. (Handy pocket-size cards bearing this table are yours for the asking.)

The use of countless thousands of feet of this tubing for wartime aircraft construction has demonstrated its consistent uniformity in wall thickness, diameter, concentricity,

BUY WAR BONDS AND STAMPS

—THEN KEEP THEM

ductility, strength, weight and smooth surface—and its easy workability and weldability. It has been proved sound in every respect both by performance in service and by FARROWTEST — the most accurate commercial method for testing tubing.

ELECTRUNITE Tubing meets standards of the U. S. Army Air Forces; The Bureau of Aeronautics,

U. S. Navy; The Civil Aeronautics Administration; and the Aeronautical Material Specifications (AMS) of the Society of Automotive Engineers. Write us for further information and as many size range cards as you need.

REPUBLIC STEEL CORPORATION STEEL AND TURES DIVISION - CLEVELAND B, OHIO

Berger Manufacturing Division

Gulvert Division Niles Steel Products Division
Union Drawn Steel Division Truscon Stee. Company
Export Department. Chrysler Bidg., New York 17, N. Y.



STAMPINGS OF QUALITY







Casual words those, stamped on a shipping order. But it took Union Oil research chemists many months to make them possible.

For it is one thing to protect an engine against outside conditions but it is quite another to seal internal surfaces against corrosion.

The fact that Union Oil Company's Stop Rust B is used by leading Pacific Coast aircraft companies for processing engines for storage and shipment is definite proof that this compound successfully meets all requirements for internal rust prevention.

Stop Rust B forms a non-drying, non-hardening film which adheres to metal for indefinite periods completely sealing every surface against rust. Engines protected with Stop Rust B may be placed in service immediately without special cleaning or servicing, as it mixes readily with all commercial fuels and lubricants

In addition, Stop Rust B is a detergent as well as a rust preventive, and engines operated on the proper mixture of lubricating oil and Stop Rust B remain clean and free from sludge. Stop Rust B contains an active ingredient to neutralize any acid residues which may be left in the engine from fuel combustion. Stop Rust B meets specifications AN-VV-C-576a and is used in ac-

cordance with instructions governing processing of aircraft engines.

For a supply of this revolutionary rust preventive-or any other of Union Oil's quality aviation products-phone your local Union Oil Company representative, or write Union Oil Company, 617 West Seventh St., Los Angeles 14, Calif.


STOP RUST B



381



3 HP Motor
8 cylinder Pump
Unloading Valve
Accumulator and Reservoir

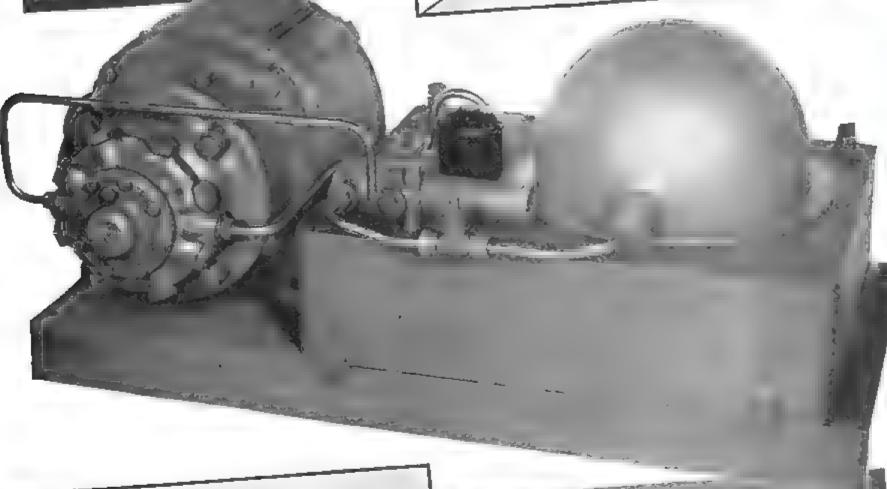

A small compact unit for machine tools, hydraulic presses and test equipment


Quickly and easily installed to smooth reliable hydraulic operations up to 3000 p.s.i.

Specifications and Engineering Data on Request



Hydraulic Division

420 Lexington Avenue, New York 17, N. Y. Factories: Watertown, N. Y.

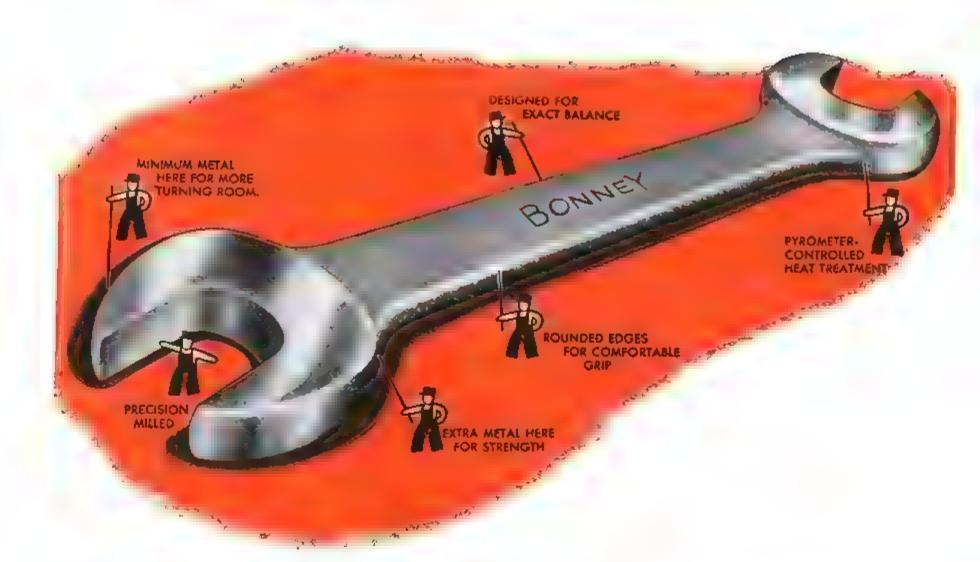

It's Easy to See Why They're Better...

It's a funny thing about wrenches. You use them all day long. They're the most important tools in your kit. You know which ones do the job best—which ones last the longest. But chances are you never stop to think why.

When you take a good look at a Bonney Wrench, it's so easy to see why it's better.

The openings in a Bonney Engineers' Wrench, for instance, aren't just milled—they're precision-milled. They fit the nut exactly—no slipping, no forcing. The jaws are tapered to give you more turning room. They're reinforced with extra metal at the

points of strain. The handles are rounded for an easy, comfortable grip. And something you can't see—to make Bonney Wrenches the strongest and toughest on the market, each one is given our special pyrometer-controlled heat treatment.

We put a lot into Bonney Wrenches because we want you to get a lot out of them.


If you do not already have a Bonney Engineers' Wrench Set, ask your nearby Bonney distributor or jobber to order one for you now. All Bonney Tools are sold exclusively through distributors and jobbers from coast to coast.



AVIATION December, 1944 AVIATION, December, 1944



will deliver peacetime power for YOU tomorrow



FOR POSTWAR POWER
Andover Engine alone weighs
just under \$2 pounds.
With generator and adapter
only 116 pounds.

THIS auxiliary power unit, developed originally by Andover for use in military aircraft, has made a consistent record of dependable service not only on Uncle Sam's B-29 bombers but also on many other types of multi-motored airplanes.

Now Andover has ready for peacetime American industry a compact power unit which offers unlimited possibilities in every application for a portable source of power.

It can be used with generators to supply electric power on demand; it can readily be adapted to operate any mechanical apparatus where compactness and portability are desired and... of course... economy.

It can be easily mounted and transported. Indeed, its versatility will simplify operations in many peacetime industries.

Our informative booklet "Andover Auxiliary Power" may suggest how this motor can help you in the coming era of peace and expansion...yours for the asking.



WHOLLY-OWNED SUBSIDIARY OF ANDOVER KENT AVIATION CORPORATION



. . With His Aeronca Program For A Small Airport!

"Anyone can build an airport", Joe told the City Fathers, "but here in Centerville we want our airport to be a paying proposition! I've given a lot of thought and study to this problem, and I'm convinced that Aeronca has the answers. The Aeronca program is based on 16 years of leadership in the personal plane business, and includes lessons learned by scores of successful Aeronca airplane dealers operating from small airports."

No wonder the Council unanimously agreed when Joe concluded, "I think we ought to get all the facts from Aeronca right now!"

Plan—today—to make the small airport in your community a profit-maker. Find out about Aeronca's complete program. Fill out and mail the coupon without delay, and lay the foundation for your success in post-war aviation'

Small Airports Can Pay! Get These Important Books Now!



Al Bennett, Director of Sales, Aeronca Aircraft Corporation, Middletown, O. Please send me the illustrated booklets checked below. I enclose 10c for each booklet.

HOW TO MAKE SMALL AIRPORTS PAY WITH AERONGA WHY YOU SHOULD BE AN AERONGA DEALER

Address

City and State

H-C

Answering some HELICOPTER QUESTIONS

The past century has witnessed the development of the telegraph, electric light, telephone, automobile, airplane, radio and many other industrial marvels, which are still in the process of transforming living conditions throughout the world. And today there is wide enthusiasm over another revolutionary development-the helicopter . . . and wide curiosity concerning its future possibilities.

Therefore it is timely to publish a sincere and factual appraisal of the helicopter and an informed statement of the part it may play in future progress. As one of a dozen or more substantial and conservative industrial organizations engaged in helicopter development—the oldest in the rotary wing field-Kellett Aircraft Corporation accepts this opportunity to present some helicopter facts and to state the opinions of its management and engineering staff on the future of the helicopter.



Today, in the United States, a half dozen or more different helicopter types are flying. To the best of our knowledge, helicopters are flying in no other country, and only in the United States is effective research and production being carried on. This is largely due to the sponsorship received from our military services during the war period.

WHAT CAN HELICOPTERS DO?

The helicopter, as a matter of normal flying operation, can rise straight into the air from a standing start; land in the same way, hang motionless in the air at low altitude over a given point for as long as the pilot wishes; fly backwards as easily as your automobile reverses; move directly sideways; fly safely inside a large auditorium.

ARE HELICOPTERS EASY TO FLY?

The men who pilot helicopters today are carefully trained, experienced men. Flying a helicopter is not a job for a novice. Many controls must be coordinated and the pilot must



ARE HELICOPTERS SAFER?

It has not yet been demonstrated that a helicopter is any more safe or less safe than other aircraft. Conventional airplanes have established impressive records for safety.

WHO WILL USE HELICOPTERS?

It is our belief that helicopters will have their first important usefulness in fields where

other forms of transportation cannot serve. In many situations the helicopter will introduce important savings of tune, manpower and money. For instance, in the spraying of agricultural crops, inspecting and servicing of cross country oil pipe lines and electric transmission lines, forest and shore patrol; prospecting; in mail and passenger service to areas otherwise inaccessible by air.

WILL HELICOPTERS BE FAST?

As aircraft, helicopters today are not very fast. To a world which accepts 400 m. p. h flight as commonplace, they may never become "fast" aircraft. BUT the helicopter's as-acrow-flies travel is much faster than automobile or train transportation, and even faster in some cases than the combination of land and plane travel which present-day air transport entails. The practical helicopter will not require a trip to an airport as a necessary preliminary to a flight.


WHAT ABOUT HELICOPTER CAPACITY?

Helscopters are still in the medium-power, cabin class. It may be some time before a type will develop which will cruise more than a few hundred miles without refueling or which will carry more of a load than a sedan.

HOW RAPIDLY WILL HELICOPTERS BE PERFECTED?

As in the case of the airplane, development of the helicopter is a matter of engineering. The present day airplane is the result of many millions of engineering-man-hours over a period of years. The present-day helicopter is the result of several hundred thousand engineering-man-hours over a investment can be made.

possess excellent skill and judgment. However, these "experiod of years -inconsequential as yet, compared with the perts" are otherwise average individuals and one or two of engineering applied to the airplane of today. Over the years them had never had experience in flying before they stepped to come, additional millions of engineering-man-hours into helicopters. It is reasonable to expect that "ease of must be expended in order that the helicopter shall make its flying" will be improved with further engineering developmaximum contribution to progress. How soon that goal is reached depends on the rapidity with which the engineering ments WHAT WILL HELICOPTERS COST? Helicopters, if they could be purchased on the market **KELLETT HELICOPTERS** today (which military requirements will not permit), would Kellett Aircraft Corporation has been a designer and builder be more expensive than the most costly automobile. Engines, of rotary wing aircraft for fifteen years. We have confidence intricate transmissions, control mechanisms and rotor blades in our ability to provide after-the-war helicopters which will require special design and construction methods. Helicopbe practical for many commercial uses. We look forward to ters are likely to be costly for some time to come. Of course, widening fields of service-along with other aircraft manuif the efficiency of mass production and the competitive facturers-in a better, happiet, more air-minded future. enterprise system are permitted to have their effect, the cost Kellett Aircraft Corporation, Upper Darby (Philadelphia), Pa. KELLETT OLDEST ROTARY WING AIRCRAFT MANUFACTURING COMPANY AVIATION, December, 1944 AVIATION, December, 1944

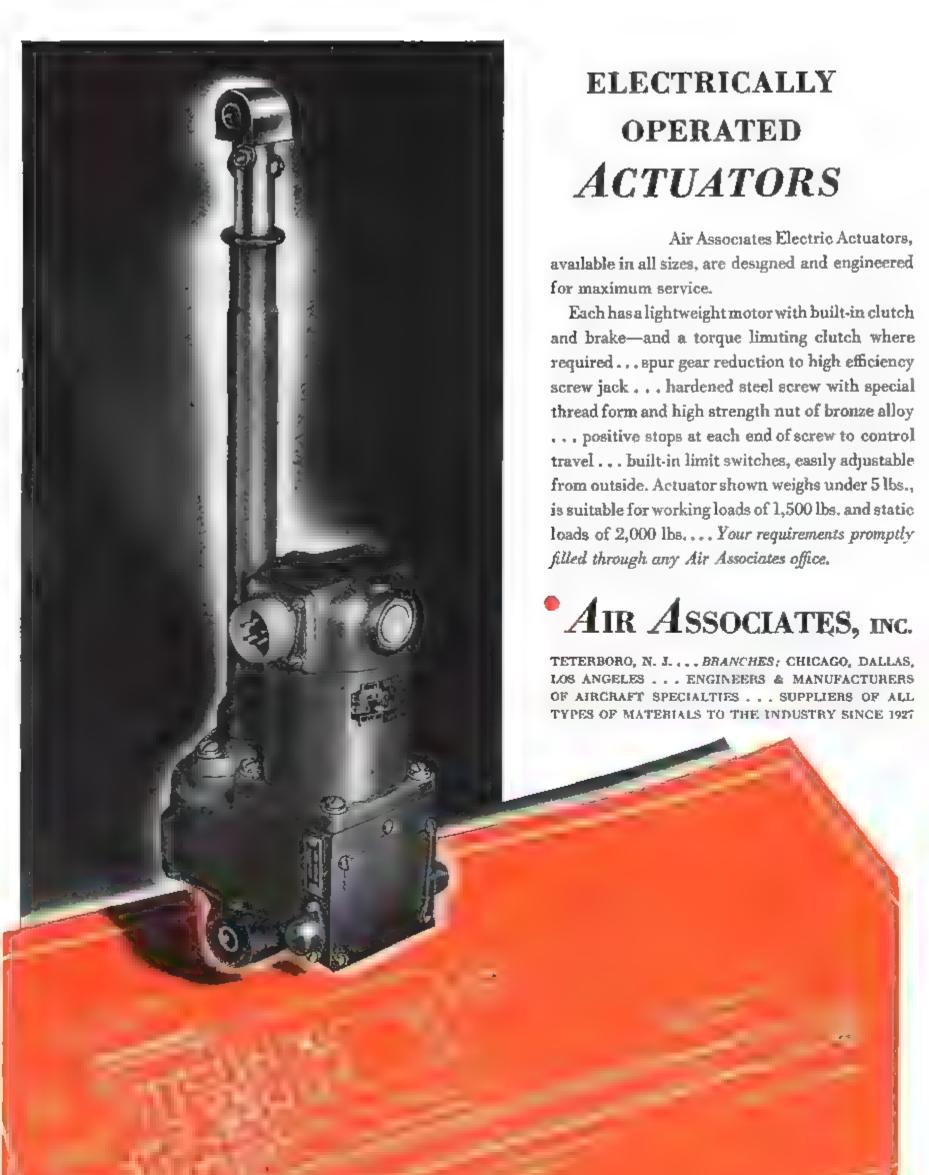

Typical Jobs



ofter grading ho ds a .0002" limit necessary for













Roller Bearing Outer Roce Finish improved from 12



noved - 220 pieces per hour Better finish and





Arcraft Volve Toppet Boller








PARTS LAST LONGER


When Honed on the SUNNEN PRECISION HONING MACHINE



There's a good reason for these results, too. This machine has an amazing record for accuracy. Straight, round holes are produced with a guaranteed accuracy of .0001". Accuracy has been held to .000025" on hardened steel jobs. A super-smooth finish of from 2 to 3 micro-inches provides a better working surface.

A new base and pump assembly, recently introduced, has improved results still further. The pumping unit provides a constant flow of honing fluid that acts as a coolant, carries away cuttings, and keeps the abrasive stone in sharp cutting condition.

There are many other reasons why the low-cost Sunner Precision Honing Machine will give you a finish that makes parts last longer. Get complete information by calling a Sunnen engineer to your plant-or write for free bulletin.

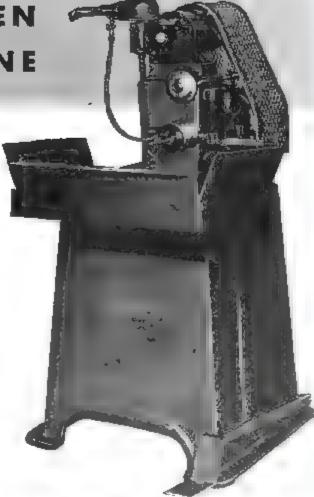

The coveled Army-Navy "E waves over the Sunnen plant, evidence of the important part Sunnan equipment is proying in the war effort.



SUNNEN PRODUCTS COMPANY · 7942 Manchester Avenue · St. Louis 17, Missouri

Conadian Factory: Chatham, Ontario

AVIATION, December, 1944





FOR AIRCRAFT ENGINES...AN AIRCRAFT SPARK PLUS

Above all else, By Spark Plugs are built to be reliable.

flying hours per plug-but reliability of per-

Their advantages include economy of flight operation and more

formance is the big consideration. For this they

were designed by aircraft spark plug specialists, and

each BG plug is inspected and tested many

This inbuilt reliability is one of the

times during its manufacture.

for many, years.

reasons why BG Spark Plugs have been

standard airline equipment

so that you can be sure yours are reliable,

136 WEST 52ND STREET, NEW YORK T9, N. Y.

Manufacturers of both mico-insulated and ceramic insulated aviation spark plugs

Contractors to the United States Army, Navy and Coast Guard and Aircraft Engine Builders



Plomb makes the most complete as-

sortment of this type of wrench - 18

opening sizes from 5/16" to 1-7/16";

fengths from 3-1/2" to 19".

Silentbloc in Your New Blueprints Means a Better Product...Lower Costs





PATENTED CONSTRUCTION gives engineered performance. Silentbluc consists of outer metal sieeve into which rubber ring is forced under high pressure and inner shaft, "shot" through rubber Radial compressive force of clon-



SILENTBLOC Mounting gives engineered control of vibration in motors and

corrects for misalignment of hinges, shafts, bearings Improves operation, cuts

DEFORE you approve any D blueprint, check the improvements you might make with General Silentbloc mountings, bearings and bushings.

If you have a problem of vibration, shock load or noise, a Silentbloc mounting can be engineered for your specific needs.

If your equipment has oscillating parts, a Silentbloc rubber torque bearing can simplify construction and give trouble-free operation without lubricants.

You can improve performance and cut production costs with Silentbloc rubber bushings that correct for misalignment of shaft supports or bearings

General Silentbloc parts can be made any size, to carry loads of ounces to tons, using any kind of


metal and rubber. Skilled General engineers can design a Silentbloc to give the exact performance you specify.

Silentbloc has been proved in use on automotive, industrial, marine and home machinery. electrical equipment, aircraft and other products. Silentbloc belongs in your new-product blueprints.

It Will Pay You to Know More About Silentbloc

For factual booklet, write The General Tire & Rubber Company, Dept. 85, Wabash, Ind.





THE GENERAL TIRE & RUBBER CO.

Mechanical Goods Division, Wabash, Indiana



provides strength for dependable pressure lines

Seamless steel tubing is being given wider and wider acceptance in industry as pressure, fuel and fluid lines. Engineers recognize the added strength embodied in solid steel walls. Other obvious advantages include light weight due to thin walls, freer passage of fluids, easier shaping and resistance to fatigue.

Today Michigan pressure tubing is playing a major role in America's war weapons and on the machines used to produce them. Tomorrow Michigan pressure tubing will fill a wide range of needs in peace-time industry. The many years of experience accumulated by Michigan Seamless Tube company are at your disposal.

AIRCRAFT

MECHANICAL

STRUCTURAL



MICHIGAN SEAMLESS TUBE COMPANY

SOUTH LYON . MICHIGAN



AVIATION, December, 1944

A DISTINGUISHED NEW NAME for A DISTINGUISHED OLD SCHOOL, A NAME THAT, IN THE SUPREME TEST OF WAR HAS COME TO SIGNIFY A NEW HIGH STANDARD IN AVIATION TRAINING





FORMERLY CURTISS-WRIGHT TECHNICAL INSTITUTE

When Major C. C. Moseley, president of Cal-Aero Technical Institute, was selected by the Army Air Forces as one of nine civilian school operators to conduct the radical experiment of training Army Air Force pilots in civil schools, the name "CAL-AERO" came into existence. So successful did the plan prove that the Army went entirely out of the business of giving primary training, and ultimately 64 such schools, the majority of them patterned after "CAL-AERO," sprang up throughout the nation. At the same time and under the same personal supervision of Major C. C. Moseley, the great school which had trained thousands of civilians as mechanics and engineers since 1929, and that hereafter will be known as CAL-AERO TECHNICAL INSTITUTE was training 7,500 Army Air Force ground crew members. It was the first school-and for a long time the only school-in the west, to be selected by

With an unmatched and unparalleled record of efficiency and safety in training more than 20,000 Army Air Force pilots; more than 1200 having been decorated for valor; together with this school's record of training Army Air Force technicians, all under the personal supervision of Major C. C. Moseley since 1929; it was but natural in planning for the post-war period that these schools come under the distinguished name of "CAL-

Honored by citations for distinguished service in training these men for the Army Air Forces, together with continuous service in training civilians for the production front, CAL-AFRO TECHNICAL INSTITUTE emerges larger, stronger and finer than ever before, on its own airport, Grand Central Air Terminal, in the heart of Southern California's grant aircraft industry

So, to you men who look forward to a career in AVIATION, you will find the best to be had in the way of specialized training in Aeronautical Engineering and Master Aviation Mechanics, at "CAL-AFRO" Technical

Today, as in the past, civilian students continue to pour into this school from many states and foreign countries, despite the difficulties of war time travel. In one recent week, two students from far south India and three from far north Iceland arrived simultaneously. Latin America and China both are heavily represented, Returning service men, anxious to fit themselves for an outstanding place in the golden age of Aviation, which is certain to follow the war, likewise are enrolling upon discharge.

What this school has done for its graduates, it can do for you. Write or mail coupon today for full information about the possibilities of a post-war aviation career.


Flight training is restricted to Army Air Force Cadets for the duration.

THIS TOWER OVERLOOKS AVIATION'S MOST DISTINGUISHED SCHOOL OF AERONAUTICS FORMERLY CURTISS-WRIGHT TECHNICAL INSTITUTE

GRAND CENTRAL AIR TERMINAL 1226 AIRWAY, GLENDALE 1, CALIFORNIA (LOS ANGELES COUNTY)

UNDER PERSONAL SUPERVISION OF MAIOR C. C. MOSELEY, PRESIDENT AND FOUNDER, SINCE 1929

ON OUR OWN AIRPORT - IN THE HEART OF THE AIRCRAFT INDUSTRY

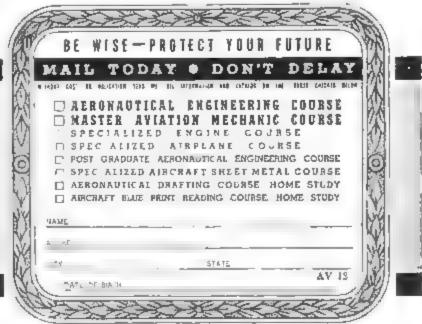



(Left) Close-up of straddle milling operation on fins for impellers of geared aircraft superchargers. Tolerance on the sides of the fins is critical as to finish and dimensions. (Right) Actual photo of a Gulf Service Engineer consulting with Superintendent on results secured with Gulf Cut-Aid on this precision machining job.

ULF CUT-AID PROVED SUPERIOR to 12 other brands of cutting oil we tested for straddle milling aluminum alloy supercharger impellers," says this Superintendent. "With this revolutionary new cutting oil, we get 10% greater production and 50% longer tool life than with the cutting fluid we used previously."

This is one of hundreds of war plants that have increased production and tool life on precision work by using the proper Gulf Cutting Oil for each particular job requirement.

Gulf performance-proven cutting oils have established records on the toughest steels and most punishing schedules that the armament and aircraft industries offer. You'll find them helpful in improving production and tool life now and in paring costs below competitive levels in the postwar period.

Let a Gulf Service Engineer show you why Gulf Cutting Oils are ideal for many of your machining jobs. Write, wire, or phone your nearest Gulf office today.

AVIATION, December, 1944



GULF OIL CORPORATION · GULF REFINING COMPANY

Division Sales Offices: Boston · New York · Philadelphia · Pittsburgh · Atlanta New Orleans · Houston · Louisville · Toledo

Federal Telephone and Radio Corporation ≥ Newark 1, N. J.



Constant testing of these instruments under flight conditions ... in the air or on the ground ... is possible with Federal's regulated-voltage power supply.


Designed to replace unwieldy storage batteries normally used for this purpose, this light-weight Federal power supply converts 115-volt alternating current into a closelyregulated, filtered direct current for the accurate testing of electrical instruments and other aircraft accessories.

This is only one of the many types of all-purpose power supply units powered by Federal Selenium Rectifiers ... another example of Federal design and manufacturing leadership . . . and another good reason why you should consult Federal first.




SNAP-ON TOOLS CORPORATION, 8020-L 28th Ave. . Kenosha, Wisconsin

Dependable all around duty assured

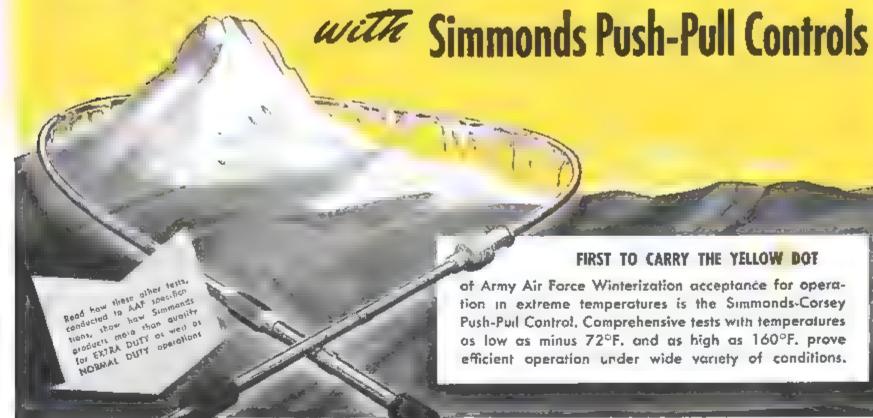


FIRST TO CARRY THE YELLOW DOT

of Army Air Force Winterization acceptance for operation in extreme temperatures is the Simmonds-Corsey Push-Puil Control, Comprehensive tests with temperatures as low as minus 72°F, and as high as 160°F, prove efficient operation under wide variety of conditions.




STATIC STRENGTH: In this test Simmonds push-pull control successfully withstands tensile and compressive forces of 400 lbs. Credit simpulication of design, improved linkage




PRECISION CONTROL: Motion between tension and compression is negligible Before endurance test average— 046"; after—.082 . Simmonds are precision built controls


your nearest 5 mmonds office.




ENDURANCE: Cycled 30,000 times under stress, as illustrated, Simmonds controls are not affected in any way, and can be expected to outlast the life of unit served.



DEFORMATION: AAF specifications call for loads ranging from 10 to 50 lbs Allawable average deformation is 140" Simmonds contrals overage only 083"



EFFICIENCY: Input-output rotio of control is measured at various temperatures in insulated chamber Rusult average efficiencies are twice the AAF requirements



CORROSION: Simmonds controls meet AAF specifications for corrosion resistance with standard cadmium plated or anodized surfaces Tube ends are rubbar sealed.

30 Rockefeller Plaza,

New York 20, New York

Branch Offices, Dayton . Washington . Hollywood . Montreal

INQUIRIES concerning Wor Contracts or Post-War problems involving

push pull control equipment are invited. Our service and neers will furnish you gladly with analyses and recommendations. Telephone or write to

SIMMONDS EQUIPMENT FLIES WITH EVERY TYPE OF ALLIED AIRCRAFT Automatic Engine Controls - Posh-Pult Controls - Spark Plugs Hydrau ic Accumulators - Hydraulic Fuses - Chronometric Radiosondes Self-Aligning Rod-End Bearings - Fosteners and Clips of Specialized Design

Manufacturing Plants: New York * Vermont * California



DEPENDABLE quality and unerring precision are two "musts" in aircraft valves and fittings. Today Kohler Co. manufactures many of these important parts on a quantity basis for the Army and Navy Air Forces and for leading aircraft builders.

Kohler, with its 71-year tradition of quality, is well equipped to furnish the kind of workmanship required to meet rigid Army-Navy specifications. Proof that it does is the fact that Kohler manufactures aircraft valves and fittings under a Class "A" quality rating assigned by the War Department.

Complete facilities at Kohler, not only for forging, but also for machining and anodizing, eliminate the necessity for subcontracting, and put us in a position to make prompt deliveries.

A new, complete catalog of all Kohler Aircraft Valves and Fittings is now ready for distribution. Just mail a postal to Dept. A-12 for your FREE copy. Kohler Co. Established 1873. Kohler, Wisconsin.

* BUY UNITED STATES WAR BONDS *

KOHLEROFKOHLER


PLUMBING FIXTURES AND FITTINGS . HEATING EQUIPMENT . ELECTRIC PLANTS


Standard in the Aviation Industry WITTEK

Aviation Hose Clamps

Type FBSS Aviotion Hose Clamp

ame of the Wittek Aviation Hose amps used on the 2,000 H.P. Proti Whitney engines that power the Curtiss C-46 Commando

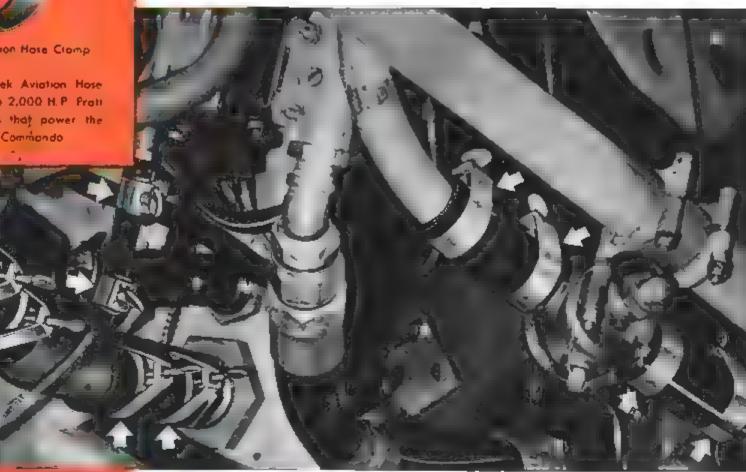

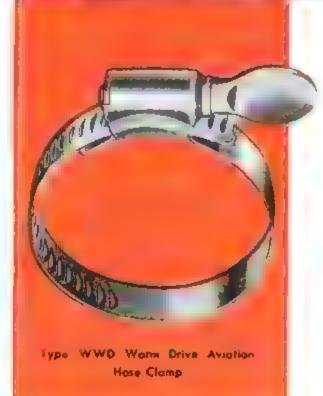

Wittek now offers two distinctly different aviation hose clamps complying with the requirements of specification AN-FF-C-406A.

Type FBSS—is manufactured in the standard AN-748 sizes and incorporate a bridge extender which provides uniform sealing characteristics. This is the most effective type hose clamp for all applications in which an adjustable clamp is not necessary.

Type WWD-a worm drive stainless steel hose clamp which, because of its wide range of adjustment, is the most effective clamp for uses where a clamp capable of accommodating various diameters of hose is necessary.


These two Wittek Aviation Hose Clamps are made from stainless steel, and combine the superior physical qualities of that material with the well-known Wittek qualities of superior service and high dependability. There is a Wittek Hose Clamp to meet every requirement of the Aviation Industry. Write for new descriptive catalog.

War Bonds for Victory







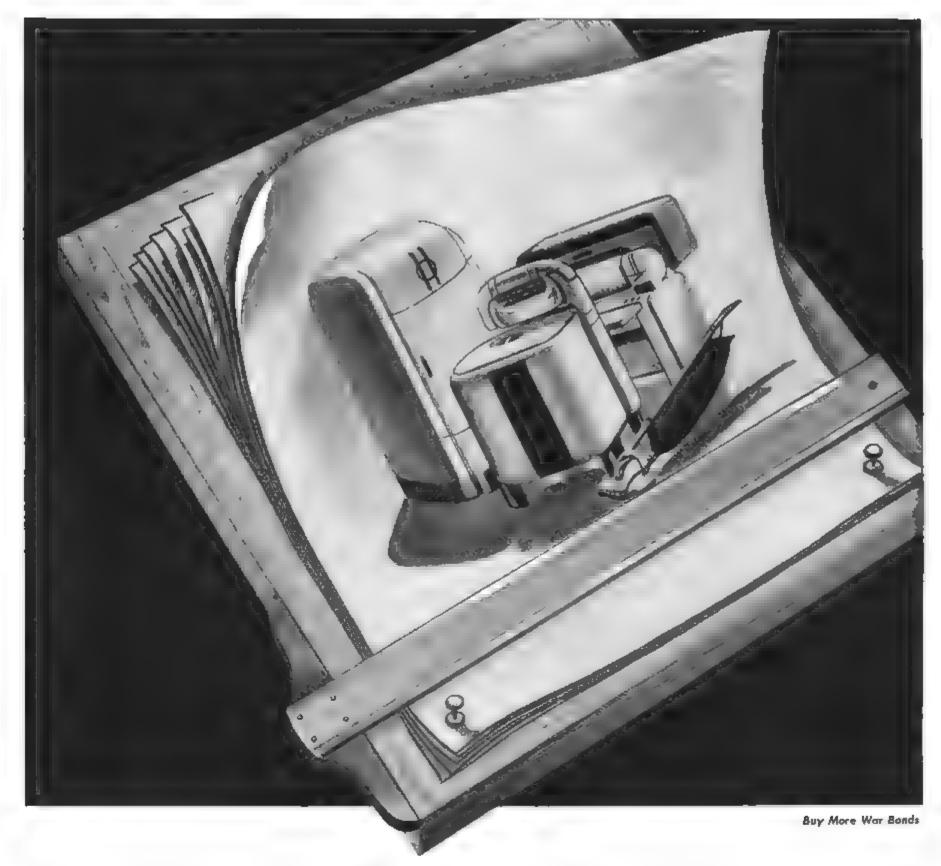

It's not too soon to write "Allied Precision" into your postwar plans

Even if your postwar products are only in the drawing board stage, we want to show how Allied Products Corporation might help you right from the start.

For years Allied has been famous for its precisely made steam-heated plastic molds, sheet metal dies, R-B interchangeable punches and dies, and other vital production tools. Now, it has won new distinction through the excellence of millions upon millions of hardened and precision ground wartime parts. Among the varied shapes and sizes, are airplane engine and gun parts finished to within limits of two ten-thousandths of an inch.

Soon, the hundreds of skilled craftsmen responsible for

Allied Precision—the amazing machinery of modern mass production—and a practical, mature business experience will be available to the producers of peace-time goods. Here is a "pool of precision" for manufacturers seeking a dependable, economical source of outstanding tools and parts. Won't you write us today?

"IT'S AN ALLIED PRODUCT"... Allied Products Corporation and its divisions, Richard Brothers and Victor-Peninsular, in Detroit and Hillsdale. Mith gan also make. Jigs and fixtures, cold forged parts, cap screws and other special products.

ALLIED PRODUCTS

Department 16, 4614 Lawton Avenue, Detroit 8, Michigan

AVIATION December 19:4

Lhinking about reconversion?...

Reconversion may mean headaches to many engineers and production men. To you who are thinking about these problems now, consider industry's new production tools—the applications of electronic tubes and what they are doing today.

FOR EXAMPLE...



a midwestern manufacturer of heavy equipment saves \$15 a ton in hardening steel bars by elertronic control... a saving of \$6% over conventional methods.

FOR EXAMPLE ...



in another plant, shells are accepted or rejected electronically, eight different tests for accuracy completed in split seconds, at a rate of one shell a second. FOR EXAMPLE . . .



a maker of hand grenade fuses prevents disastrons and costly explosions by checking the exactness of the powder charge with electronic tubes

The profitable application of electronic tubes is legion. A look around your plant may disclose ways to save you worry, get increased production and create more profits. It may be in electronic induction or dielectric heating, in welding control, in motor speed control, in inspection, in counting, sorting, weighing. Can you save money or not by putting electronics

about an operation of this kind and need help, let us know. Write Westinghouse Electric & Manufacturing Co., Lamp Divi-

sion, Bloomfield, New Jersey.

Westinghouse


PLANTS IN 25 CIT ES OFFICES EVERYWHERE

Quality Controlled Electronic Tubes

For industrial tube replacements, remember von can get quick local service from your nearest Westinghouse distributor.

WESTINGHOUSE PRESENTS John Charles Thomas . Sunday 2 30 EWT, N.B.C. & Ted Malone . Monday, Wednesday, Friday-10-15 EWT Network

UNIONMELT WELDING

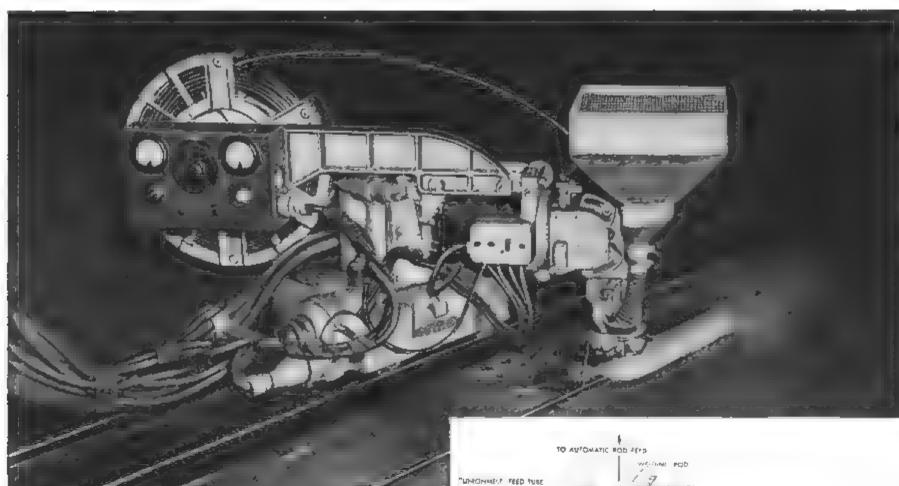


Linde's Automatic Electric Process

UNIONMELT electric welding joins steel of any commercially used thickness at speeds up to twenty times faster than similarly applicable methods. Because the process is automatic, it produces uniform welds of unusually high-quality with minimum dependence on the manual skill of welding operators.

The flexibility of UNIONMELT welding has led to its application for a wide variety of work—for heavy and light material, for repetitive operations or single jobs, and for shape-welding as well as for straight-line and circumferential welding.

Metal-fabricating shops of all kinds can profit by using the Unionment process for either fabrication or repair work. If you are interested in learning more about this process, or in discussing its possibilities for any particular application, please write to us.

BUY UNITED STATES WAR BONDS

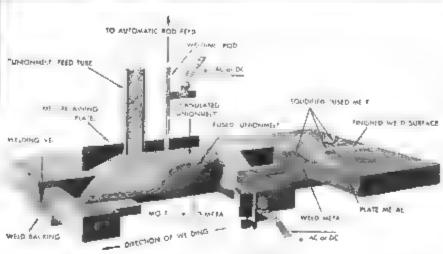

HOW IT WORKS

- I A special granulated material known as UNIONMELT is laid down along the seam to be welded so that it covers the end of the welding rod.
- 2. Heat, generated by passing an electric current through the UNIONMELT composition between the welding rod and the parts being welded, progressively melts some of the UNIONMELT so that it forms a protective blanket over the weld area.
- Underneath this molten UNIONMELT composition, metal from the rod and from the place edges are fused to form the weld.
- The molten Unionment cools and solidifies behind the welding zone and, on further cooling, contracts and detaches itself.

The process of welding electrically beneath a mineral melt by the method illustrated is patented.

The Linde Air Products Company

Unit of Union Carbide and Carbon Corporation

General Office, 30 E. 42nd St., New York 17, N. Y.
Offices in Other Principal Cities
In Canada: Dominion Oxygeo Company, Limited, Toronto

LINDE OXYGEN PREST-O-LITE ACETYLENE UNION CARBIDE OXWELD PUROX PREST-O-WELD UNIONMELT APPARATUS OXWELD AND UNIONMELT SUPPLIES

The word 'I monme to is a registered trade-mark of The Lode Air Property Company




Self-Acting Variable Pitch Propeller Means Wider Horizons for Private Flyers

flyers of tomorrow will have "new wings" . . . wider horizons. With Aeromatic, you can use shorter fields or strips for takeoff or landing . . . cruise farther and faster per gallon of fuel. That means greater range . . . more places to come from and go to . . . more get-up . . . more go . . . more fun.

Aeromatic gives you those things by giving you variable-pitch performance every foot of the way . . . and giving it automatically. At all times, from start of your take-off run to the end of your landing

Thanks to the unique Aeromatic Propeller, private run, Aeromatic knifes through the air with just the flyers of tomorrow will have "new wings" . . . wider right pitch or size of bite . . . gives you peak engine horizons. With Aeromatic, you can use shorter fields performance with each revolution.

Completely self-contained and self-acting, controlled by natural forces, Aeromatic Propeller requires no instruments . . . no controls . . . nothing additional for the pilot to watch or do. Used today for military aircraft from 100 to 450 HP, Aeromatic will soon be available for your private plane. Meanwhile, engineering and performance data are available to you and to manufacturers. Don't hesitate to write.

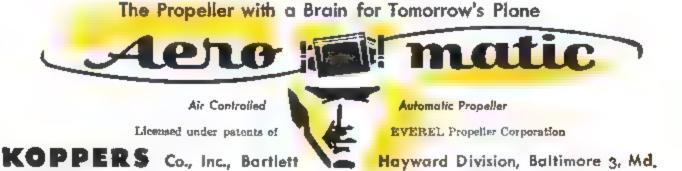




Your New Product may need the Magic of Electrical Control

TAKE another look at that new product your designers are planning. It may be that Automatic Electric control devices can make it function better—at lower cost. It's worth checking into.

To help designers perfect new developments—or improve old ones—Automatic Electric offers this unique three-point service:

- Technical advice by experienced field engineers, who know the "how" and "why" of control technique.
- A complete range of relays, stepping switches, and other control units—time-proved products readily adapted to your needs.
- 3. A design and manufacturing service for complete engineered

Ask our field engineer for a copy of our catalog of control devices. He will be glad to show you how they can serve you.



Here are jobs that can be done easier and better with Automatic Electric control devices

Automatic Selection and Switching of Circuits • Time, Temperature and Sequence Control • Counting and Totalizing • Inspection and Sarting Operations • All Types of Electrical and Electronic Control.






AUTOMATIC ELECTRIC SALES CORPORATION

1033 West Van Buren Street • Chicago 7, Illinois

In Canada: Automatic Electric (Canada) Limited, Yaranta

PARTS AND ASSEMBLIES FOR EVERY ELECTRICAL CONTROL NEED

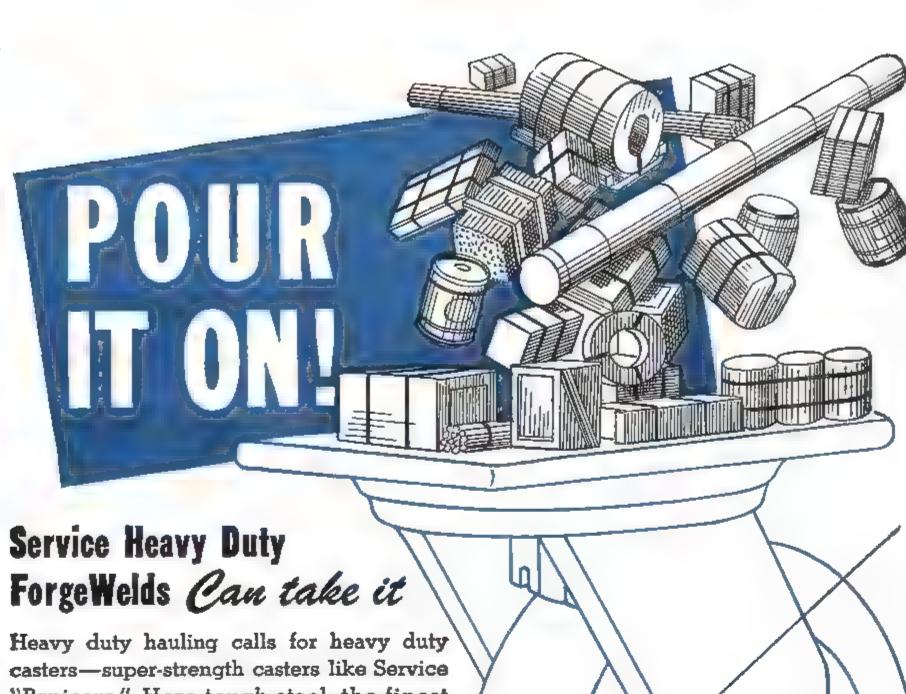

Heavy duty hauling calls for heavy duty casters—super-strength casters like Service "Bruisers." Here tough steel, the finest bearings and sound design are combined into casters that will stand day after day of rough and tumble service. A set of four under trucks and trailers will handle 16,000 lb. loads.



Display at REW YORK POWER SHOW Madion Square Bardons Hov. 27 to Ber. 2

Top plate and King bolt forged from single piece of SAE-1048 steel • Double ball race swivel in machined raceways of 230 Brineil • Hyatt or Timken roller bearings • Wheels of iron, steel, molded plastic, or rubber.



SERVICE CASTER & TRUCK DIVISION OF DOMESTIC INDUSTRIES, INC.

505 N. Brownswood Avenue, Albion, Michigan
Eastern Factory 434 Somerville Ave., Somerville (Boston) Mass.
Toronto, Canada, United Steel Corporation, Ltd., SC&T Co. Division

TRUCKS, CASTERS AND SPECIALLY DESIGNED LIFTING AND HAULING UNITS

Write, wire or phone for bulletins.


Deficient of the second of the

A REVOLUTIONARY METHOD FOR REMOVING EMBEDDED TOOLS



DRAFTO'S SIMPLIFIED DESIGN AND OPERATION MEAN QUICKER
REMOVAL OF EMBEDDED TOOLS---WHERE AND WHEN NEEDED

Save TIME MATERIAL MONEY



Removal of embedded tools by Drafto's "vibrating are" principle preserves delicate threads and contours in dies and production pieces—saves work that formerly had to be scrapped. The Drafto Disintegrator is compact, portable, easily handled. Disintegrator head operates in any position. Anyone can use it. Engineering representatives will demonstrate, in your own plant — on your materials.


... \$295⁰⁰

DRAFTO CORPORATION

1938 WALNUT STREET
COCHRANTON, PENNSYLVANIA
Telephone Cochranton 30

Representatives in key cities

AVIATION, December, 1944

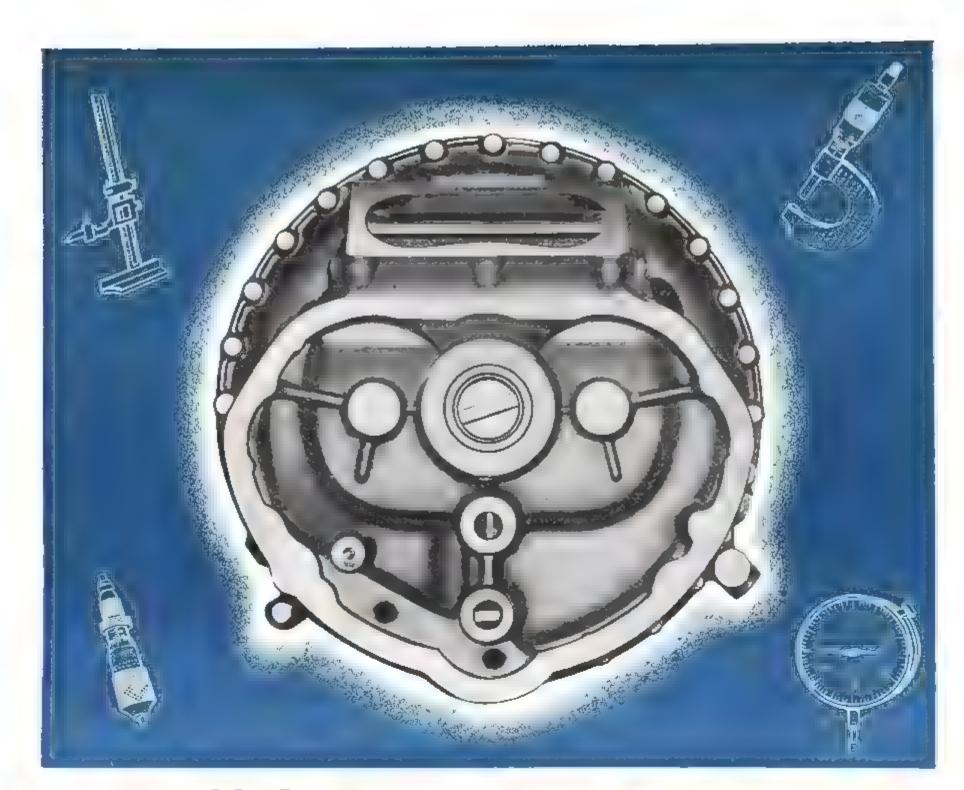

Buffalo Precision Patterns

Pictured is another intricate casting made from a Buffalo Precision Pattern.


As an integral part of one of America's most famous fighter plane engines, this casting must be dimensionally accurate to within one-thousandth of an inch and must measure up to the strictest requirements for metallurgical soundness.

At Buitalo Pattern Works, we have been specializing in precision patterns for over

half a century. Our skill and wide experience with metals, structural design and practical fabrication are sound reasons why we have been privileged to develop extremely difficult patterns for many of America's leading companies.

We invite you to consult us concerning your present or post-war pattern problems. Get the benefits of "Buffalo" precision. Write or wire Dept. B today for complete information.



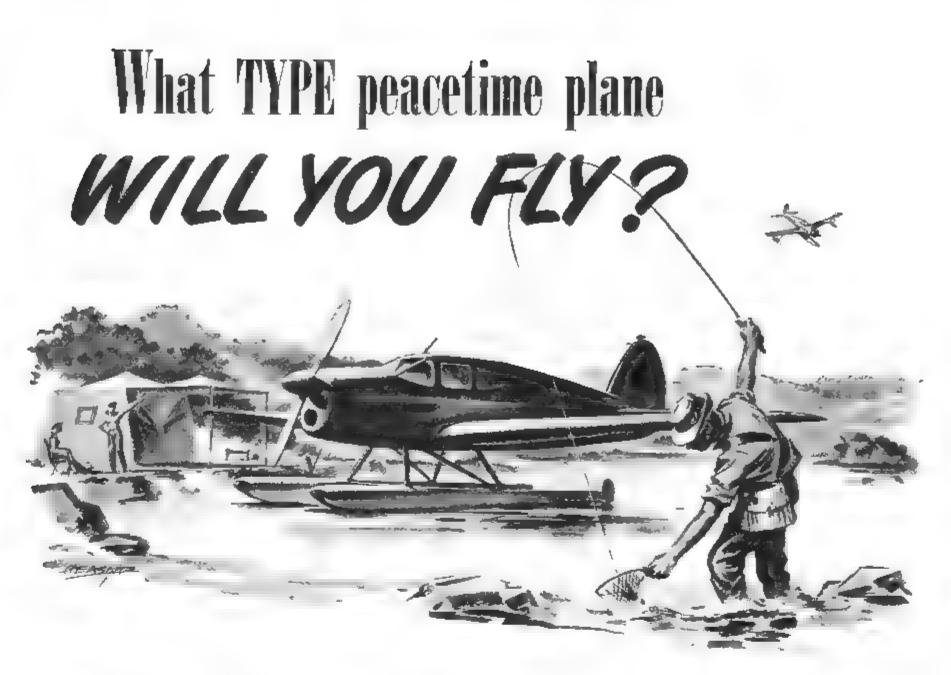

LANDPLANE? SEAPLANE? AMPHIBIAN? FLYING BOAT?

Check your choice on this popular "Aircraft Quiz"

PICTURE yourself (after the war) on a seaplane holiday trip to your favorite lake-trout for breakfast - far from the crowded highways -- back to nature at 150 or 200 mph, spending your time on solid enjoyment instead of creeping through the traffic lanes! Or perhaps you're thinking of a nice little amphibian, or a neat twin-engined cabin plane to set down like a thistle on wheels!

When you come to Question 14 on the provocative Bellanca Aircraft Quiz you'll find seven different types of aircraft to choose from and check, with room to


write in more. Question 15 reads, "How will your post-war plane be used?" Here nme answers invite your study, and you can list four additional uses. These and many other Ouiz questions have started thousands of Americans thinking ... and they help straighten out your thoughts on the one plane that will serve you with most satisfaction and greatest economy.

Bellanca engineering will have a bearing on that item of economy, too. Builders of outstanding aircraft since the first Bellanca cabin plane flew non-stop from New York to Berlin in 1927, Bellanca engineers are now giving their best efforts to winning the Victory with precision-built warplane armaments and components. But they're planning to convert all this skill and experience to your post-war plane, too - and they'll welcome vour ideas!

We want you to be among the many who are filling out this purposeful and constructive Aircraft Ouiz. It's free, you know—and in addition we'll send you later our report summarizing all the answers! The Quiz covers engines, range, speeds, construction, wings, landing gear, controls, props, capacity, and other aircraft features. Just send your name and address - get the Quiz by return mail!...Bellanca Aircraft Corporation, Dept. S.3. New Castle, Delaware,

BELLANCA



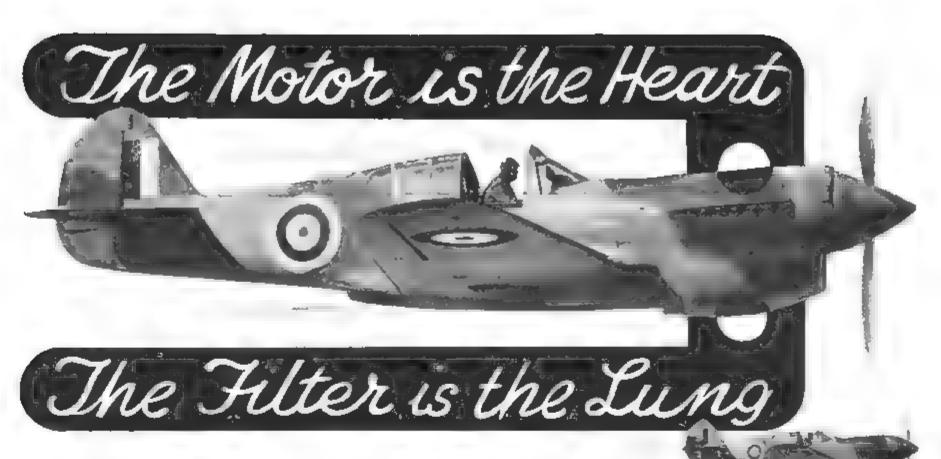

As everybody knows the human heart turret mechanism and hydraulic retractions the control motor through which, able undercarriages. Vokes Filters are of in popular language, every drop of blood (often clogged up with waste and impurities) is brought into contact with the lungs there to be purified and recirculated through the system to energise muscles and stimulate nerves. This con- Filters in many forms of industrystant purifying of the blood-stream is to mention one particularly—the proessential to the healthy functioning of vision of filters for tractors operating all parts of the body.


" feed " the heart of the aircraft the motor or engine must be freed from impurities to ensure maximum rehable performance. Vokes Filters are the lungs which ensure clean air and clean oil being dehvered where it is required. They clean all the air and all the oil all 3 000 models of their various filters and the time keeping up a sustained filtration efficiency of 99.9 per cent. of all ings to secure sustained maximum fildust particles to 0.00004 in diameter.

Vokes Air and Oil Filters are fitted to aircraft flown in all battle areas by the Filter to any size or capacity for any R.A.F., also Dominion and American Air Forces. Not only do Vokes Filters sult and co-operate with the firm who service all types of engine, radial or in line, but they are also used for gun this vitally important work.

course used on test-bed equipment in the world's most famous zero-engine producing works.

American engineers have for a long time adopted Vokes Air, Oil and Fuel usually in conditions where dust and In the same way the air and oil that sand storms are a perpetual menace. As on the battle fields where sand played such havor with tanks and tractors, so in agriculture Yokes Filters with their easily cleanable or replaceable parts prove invaluable.

Vokes have actually produced over supply the necessary housing and ducttration efficiency. Vokes are ready to produce any type of Air, Oil or Fuel industry. It will surely pay you to conare original proneers and specialists in



VOKES VEROVEE FILTER FLEMENT



VOKES OIL FILTER FOR AIRCRAFT

VOKES FILTRATION & SILENCING CO. INCORPORATEDA 101, Park Avenue, New York, & VOKES (CANADA) LTD., 1123, Bay Street, Toronto, Canada.

Contractors to British and Dominion Governments.



VOKES FLAME TRAP SILENCER FOR ATRURAFT

DESIGNERS PATENTEES & MANUFACTURERS OF AIR OIL & RUEL FILTERS & SILENCERS

HOW TO CUT THREADS IN THE NEW



ARE YOU PLANNING TO USE NEW MATERIALS AFTER THE WAR?

Experimenting in the threading of materials that are new to you can be an expensive, time-wasting process.

Magnesium, aluminum, various plastics, and other materials which are being used more and more widely require individual threading shop practices. The Greenfield Tap and Die Corporation has had wide experience in threading all kinds of materials and is ready to help you select quickly and efficiently—the propositive ading tool and gaging setup for your product.

SIMPLY CALL "THE GREENFIELD MAN" - THROUGH YOUR GREENFIELD DISTRIBUTOR.



GREENFIELD TAP and DIE CORPORATION . Greenfield, Massachusetts



QUENCHED AND TEMPERED

NICKEL STEEL

FORGINGS COMBINE

EXCEPTIONAL DUCTILITY HIGH TENSILE STRENGTH

Composition and Typical Properties of Normalized Quenched and Tempered 24% Nickel Steel Rods

Description P	Melt Yield Pt. No. #s per Sq. In.	Tensile Strength #s per Sq. In.	Elong. % in 2 ln.	Reduc- tion in - Area %	ANALYSIS					
					Cor.	Мапд.	Phos.	Sul.	Sil	Ni
Main Rad	92900	110000	25 0	64.4	.31	.76	.027	.026	.25	2.75
Main Rad	86500	104500	25 5	65 6	.32	.86	.034	032	.29	2.69
Main Rod	86360	104400	26 0	64 8	.32	.86	.034	.032	.29	2.69
Main Rod	87850	102350	26.0	66.2	.31	.89	.037	.025	.32	2.69
Front Rod	86000	102250	25 0	67.3	.29	.82	.035	.027	.24	2.71
Front Rod	83900	104250	25 0	66.1	.29	.82	.035	.027	.24	2.71
Front Rod	86850	104250	27.0	66.1	.32	.86	.035	.025	.30	2.65
Front Rod	89500	107050	25.5	65.6	.32	.86	.035	.025	.30	2.65
Back Rod	89500	107650	25 0	62.7	.30	79	.030	.025	.22	2.71
Back Rod	87500	306450	25 0	65.4	.29	82	.035	.027	.24	2.71
Back Rod	87000	105600	25 0	65 4	.29	.82	.035	.027	.24	2.71
Back Rod	88150	104850	26 C	66 8	29	.82	.035	.027	.24	2.71

Specimens Taken from Mid-Section of Prolongations of the Forgings

The above table compiled by the American Locomotive Company shows the chemical compositions and mechanical properties of some normalized, quenched and tempered nickel steel front, main and back rods recently produced as replacement rods for locomotives being speeded up and rebalanced. These values are typical of replacement rod forgings recently tested by that company.

Quenched and tempered nickel steel forgings provide high tensile strength and ductility, combined with unusual toughness and high fatigue strength-qualities which tend to obviate breakage and assure long, trouble-free service when employed in heavy duty machinery and equipment.



Catalog "C" makes it easy for you to get booklets and bulletins on industrial applications of Nickel, metallurgical data and working instructions, Why not

send for your copy today? * Nickel THE INTERNATIONAL NICKEL COMPANY, INC., 67 Wall Street, New York 5, N.Y. AVIATION, December, 1944



Industrial users of WILCO Products will find the increased facilities, the new products and techniques developed by WILCO for war service of great advantage to their own postwar products.

Every

MANUFACTURING

CUSTOMER

Will Benefit

As the Hourglass indicates . . , with the coming of peace, many WILCO products now making for precision performance in airplanes, ships, tanks, guns and instru-ments of the Army and Navy will play an equally important role in meeting civilian needs for hundreds of useful and reliable products.

The demand of all branches of the service for Thermostatic Bimetals and Electrical Contacts has motivated many WILCO developments of great potential value to postwar industry. New products added to an already extensive line; increased facilities for refining and fabricating precious metals: greatly extended rolling mill facilities these new additions and improvements. now devoted principally to the war effort. will prove equally helpful to manufacturing customers in meeting their peacetime production and marketing problems

WILCO PRODUCTS ARE: Contacts-Silver, Platinum, Tungsten, Alloys, Sintered Powder Metal. Thermostatic Metal-High and Low Temperature with new high temperature deflection rates. Precious Metal Callector Rings for rot_ting controls. Silver Clad Steel. Jacketed Wire-Silver on Steel. Copper, Invar, or other combinations requested. Rolled Gold Plate. Special ma-

THE H. A. WILSON COMPANY 105 Chestnut Street, Newark 5, New Jersey

Branches, Detroit . Chicago



Thermometals—Electrical Contacts Precious Metal Bimetallic Products



WHEN Howard R. Hughes set a new round-the-world record in 1938, he clipped the previous record to less than half. And he experienced the odd sensation of apparently gaining on time. For on Hughes' big silver monoplane the sun set and rose five times during the four days' flight.

This was also the fastest round-the-world ride ever taken by Exide Batteries, which have been used in so many history-making flights. On the Hughes flight, Exide Aircraft type batteries were used for starting, and for furnishing current for landing lights, navigation lights, and instrument lights. They also furnished the major portion of current requirements for radio broadcasting, and were in reserve for emergency power in case of generator failure.

Today, Exide Aircraft Batteries are in daily service throughout the world on our mighty bombers, hard-hitting fighters and other aircraft. Pilots, engineers, and ground crews have learned from many successful missions that they can always count on Exides for dependability, longlife, and ease of maintenance.

61.6

A ROUND-THE-WORLD EXIDER WRITES

Interesting letters are received daily from some of the more than 1400 Exiders in the Service. One of these letters says in part:

"No matter where you go, you'll always see Exide Batteries on the job. In Australia 1 saw them advertised, and in Egypt I saw them in use. Keep up the good work. We are proud of what Exide is doing in the war."



THE ELECTRIC STORAGE BATTERY COMPANY, Philadelphia 32

Exide Batteries of Canada, Limited, Toronto

HYDRAULIC KWIKIOZ VALVE

Single Seat Balanced Shut-off Valve—Never Affected By Back Pressure Whether Open or Closed


Typical A-P Control development for the aircraft industry, the KwiKloz Valve offers new advantages in hydraulic testing systems and aircraft hydraulic system lines. A balanced valve, with a single seat, it permits easy and INSTANTANEOUS closing against a maximum pressure of 1500 lbs. p. s. i.

It is more efficient, has fewer parts, is smaller, lighter, and uses less material. Can be quickly changed for clockwise or counter-clockwise operation. Corrosion resistant parts, heat treated, ground, and accurately polished. Outside dimension, 2½" x 2% " x1½"; made to take connections per AND-10050 specifications or pipe tap.

> For KurKloz Bulletin and Catalog of A-P Aircraft Controls . . check and return this coupon .

HYDRAULIC KwiKloZ

VALVE

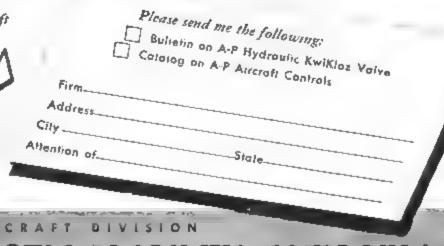

2484 North Thirty-Second Street . Milwaukee 10,

AVIATION, December, 134: AVIATION, December, 1944



for Peace and Good Will



Bonds—is the duty of every peace-loving American. In that way he gives a practical Christmas Gift . . . a guarantee to the entire world . . . for Peace and Good Will

Use U.S. Super-Positives
U.S. HAMMERED PISTON RING CO., INC.
STIRLING, NEW JERSEY, U.S. &






Delco-Remy Aircraft Electrical Equipment

Over coastline, forest country and plains, auxiliary "eyes" of the armed forces peer earthward—eyes of the Civil Air Patrol. The job they are doing is an unselfish routine of volunteer air hours, tedious tasks, courier service and assembly maneuvers . . . essential to national security, and contributing much to the progress of aviation in years to come.

More than half of Delco-Remy's facilities are now engaged in the manufacture of electrical units, precision parts and products for the aircraft industry. The efficiency and dependability of Delco-Remy electrical equipment in military planes of all types qualify it for service in cargo ships, airliners and the private planes of the future.



IVISION, GENERAL MOTORS CORPORATION

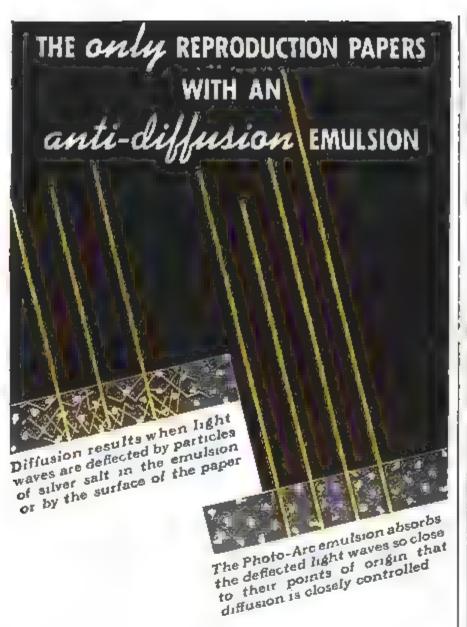

Light-diffusion closes up lines in a negative, spreads them in a positive print. It causes poor definition, lost details, fuzziness. In the past, diffusion could be avoided only by achieving exactly the right exposure,

The new Photo-Arc emulsion reduces diffusion — reduces it so decidedly that full, non-critical exposures can be made. Lines are clean and sharp. Greater density, greater contrast, greater legibility are assured.

PEERLESS PHOTO-ARC REPRODUCTION PAPERS

The only silver emulsion reproduction papers which can be handled and processed without dimming lights

The only such papers which can be run in any kind of continuous blueprint machine



420

Send for literature giving full information


Manufactured only by

PEERLESS PHOTO PRODUCTS, INC.

Dept. 12b, 50 Broadway, New York 4, N. Y.



RELEKET Ondustry Ontroduces to Industry The 250 KV X-ray Inspection Unit

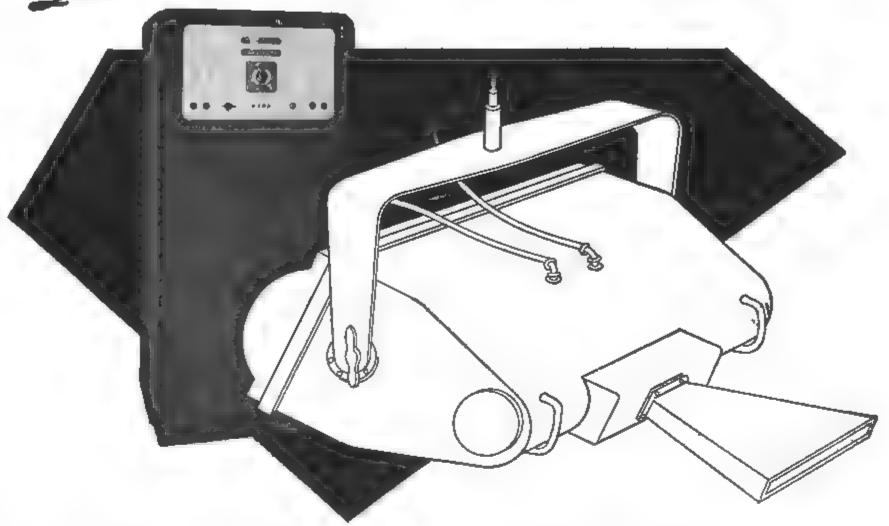

More Simple * More Dependable * More Efficient

Here's an important new industrial X-ray unit that has plenty of power and penetration to cover the widest range of inspection requirements—yet it is the easiest-to-operate X-ray apparatus produced today. Whatever can be done automatically is done automatically—the element of human error has been eliminated to the greatest possible extent. The machine does more—the operator does less—and you get better results.

A self-contained tubehead, with built-in oil cooler, eliminates separate transformers.

Stepless push-button control provides infinite kilovoltage selection.

Power is instantly and automatically shut off at maximum tube rating.

Pilot lights indicate—not only when there is trouble but shows where the trouble is.

Automatic safeguard permits radiation of X-rays only when cooling water is flowing.

Line compansator is adjustable while unit is in operation.

Constant milliamperage provided by inductive filament regulators and filament compensating transformers.

This 250 KV unit can be built into one of KELEKET'S radiographic production cabinets, can be furnished on hand truck, or mounted on either stationary or mobile jib crane.


These and many other individual features make the 250 KV machine the easiest, smoothest-running inspection unit available to Industry today. No other industrial X-ray unit will accomplish as much for you with the simplicity, dependability and efficiency that KELEKET'S 250 offers. Get all details from your KELEKET representative, or write us direct.



THE STANDARD OF THE AIRCRAFT INDUSTRY






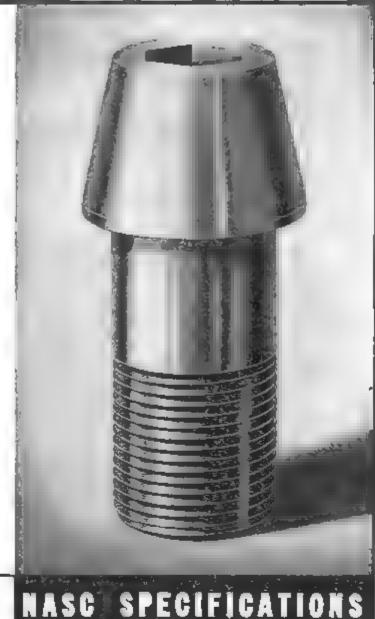

HOLO-KROME INTERNAL HEX WRENCHING BOLTS

The BETTER Fastening Method

QUICK & POSITIVE TIGHTENING DUE TO INTERNAL WRENCHING



Solve that seemingly difficult fastening problem by specifying Holo-Krome Internal Hex. Wrenching Bolts. The experience of Design and Production Engineers prove this to be the better fastening method . . . Uniform precision and a finer quality is assured because of the Holo-Krome patented manufacturing process of Completely Cold Forging . . . To be sure—specify "HOLO-KROME" and Save WEIGHT—SPACE—TIME.



Compressibility

(Continued from page 175)

straight at the wing root. Special emphasis has also been given to the length of the fuselage aft of the trailing edge of the wing to minimize fuselage drag.

Wing

The wing forces and moments also change as a result of compressibility effects. With increase in speed or Mach number the resultant of the lift forces tends to shift toward the trailing edge of the wing. Accordingly, care should be given to the design of the wing trailing edge as a result of this shift in loading. The leading edge of the wing should be very rigid as a result of the increase in pressure. It is extremely important to make the root section as thin as possible, and effort should be made compatible with the installation of machine guns, gas tanks, and landing gear not to exceed a maximum thickness of 12-14 percent.

In this respect, propeller slipstream effects will tend to increase the local speed over the wing immediately behind the propeller.

Wing Dive Flap

In dives at Mach numbers above 0.82, the greatest increase in diving moment, resulting from compressibility, tends to nose the plane down, and control becomes difficult until an altitude of approximately 12,000 ft. is reached. Neither elevator nor full tab motion is very effective, although the full tab deflection will raise the altitude at which pullout is possible, by a few thousand feet. The pullout, when it occurs at approximately 12,000 ft., is relatively sudden and sharp, and excessive load factors may be developed. The solution to this condition was the installation of a dive flap. With this flap a controlled pullout can be achieved at any altitude and Mach number (Figs. 8, 9, 10, 11, and 12).

Propeller

The propeller problem is very important since the propeller's primary purpose is to convert engine horse-power into thrust. A blade section presents the same problem as does an airfoil section, but it involves more difficulties in that we have rotational as well as forward speed. As a result of these two speeds, the problem of compressibility is much more severe.

The general trend of present-day propeller design is toward wider blade chord to alleviate the effects of compressibility on the blade section. Various propellers have been tried on the P-47 to increase the rate of climb performance. The original propeller had a somewhat narrow chord distribution.

with result that climb performance was sacrificed. Tests with wider blade chord propellers have increased the rate of climb considerably.

With the introduction of more horsepower and improved turbosuperchargers which increased the critical altitude of the plane at which maximum horsepower can be maintained, six-bladed dual-rotation propellers have been tested to determine their effect on stability, high speed, and rate of climb. The results, to date have been discouraging. More development and research work will have to be devoted to the dual-rotation problem.

Engine Cowl

The engine cowl is very much like an airfoil section in that it has a leading edge radius. The redistribution of forces on the cowl are similar to that of the wing. Care should be taken to avoid sharp curvatures at the leading edge of the cowl, in much the same way as with an airfoil section.

Wind tunnel experiments show that the shock wave is not limited to a particular point on the airfoil but moves within a given neighborhood of points. This phenomenon is called by some the "dancing" shock wave and immediately suggests an uncertainty factor in our theoretical setup. The dancing phenomenon may be quite similar to the Uncertainty Principle in quantum mechanics, where a single wave function of a given type for a free particle corresponds to the physical condition in which the momentum and the energy are exactly known, but the position of the particle is unknown,

The aeronautical engineer should probably content himself with certain "band" values rather than exact values of the aerodynamic forces and moments in the subsonic region of flow Flight tests have indicated that compressibility effects are not as severe as predicted by theory (Fig. 13). This may be partially explained by the fact that we have not evaluated the influence of viscosity with the attendant boundary layer. The boundary layer probably serves as a cushion and thereby tends to alleviate conditions, since the temperature within the boundary layer is several degrees warmer than the air outside this layer.

In conclusion, these and many other problems challenge our imagination without as yet yielding more than a tantalizing guess as to their real nature. Furthermore, it should not be forgotten that speeds above that of sound are near and cannot be dismissed much longer (Figs. 14 and 15). For the man who wants problems of immediate practical interest to tax his powers to the utmost, compressibility is a happy hunting ground.



MAILING LISTS THAT WORK...

McGraw-Hill Industrial Mailing Lists are a direct route to today's purchase-controlling executives and technicians in practically every major industry.

These names are of particular value now when most manufacturers are experiencing constantly increasing difficulty in maintaining their own lists.

Probably no other organization is as well equipped as McGraw-Hill to solve the complicated problem of list maintenance during this period of unparalleled changes in industrial personnel. These lists are compiled from exclusive sources, based on hundreds of thousands of mail questionnaires and the reports of a nation-wide field stail, and are maintained on a twenty-four hour basis.

investigate their tremendous possibilities in relation to your own product or service. Your specifications are our guide in recommending the particular McGraw-Hill lists that best cover your market. When planning your ladustrial advertising and sales promotional activities, ask for more facts or, better still, write today. No obligation, of course,

McGraw-Hill Publishing Co., Inc.

DIRECT MAIL DIVISION

930 WEST 42nd STREET NEW YORK, 18, N. Y.



You'll be up in the air after the war - flying your own

plane when the plans of tens of thousands of sportsmen, business men and aviation enthusiasts for private flying become a reality. Hallicrafters radio telephones for use in your own plane will fit right into those plans. They'll give you greater safety and freedom in the skies. To keep pace with fast breaking developments in aviation, Hallicrafters will be ready with the finest, most dependable twoway radio telephone communications equipment you can get.



THE HALLICRAFTERS COMPANY, MANUFACTURERS OF RADIO AND ELECTRONIC EQUIPMENT, CHICAGO 16, U.S.A.

424

AVIATION, December, 1944



Bros.' production line by the hundreds of thousands.

"Aircraft quality" gears were developed to meet the exacting demands of the powerful Pratt & Whitney engines. Light weight and tremendous strength-the ability to stand high speeds and heavy loads, and yet assure long life were essential. Despite extremely thin sections, "aircraft quality" gears must carry tooth loads far in excess of values customarily considered safe design and must operate at pitch line velocities that can be measured in miles per minute.

These unique qualities of Foote Bros. "aircraft quality" gears offer many advantages to manufacturers of equipment requiring the transmission of power. Right now in the drafting room and experimental laboratories of many of these manufacturers-designs for tomorrow's peacetime machines are being denew developments that otherwise would be impractical.


To aid your engineers in determining the advantages which "aircrast quality" gears will bring to your product, our engineering department is now developing an engineering manual which should be in the hands of every designing engineer-every production man-facing problems of power transmission A copy will be sent on request as soon as it is ready.

FOOTE BROS. GEAR AND MACHINE CORPORATION Dept G, 5225 S. Western Blvd.

This informative product en- . gineering manual on air-craft quality gears contains data on a new and revolutionary type of precision gear. A copy will be sent to you on request as soon as it is ready.

FOI	TE BROS
Better Power Tr	ansmission Through Better Bears

FOOTF BROS. GEA 5225 V. Western Blv Please send me 'Aircraft Quant	d. (b.cago a copy of	9, III the Engineers	Dept (og Bulleun	Ġ	
Name					
Pasition					
Сотрану . ,	, .			+ h	**
Address	*	+ > 1 4			
City			State		

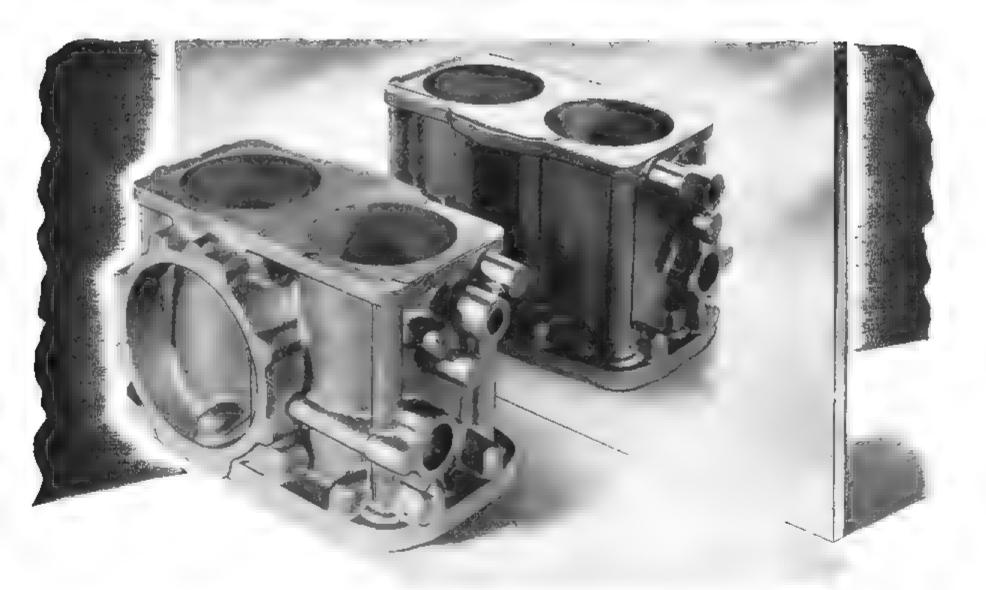

With Permite PERMANENT MOLD Castings the MILLIONTH is the image of the FIRST

TURN OUT a million Permite Aluminum Alloy Castings by the permanent mold process, and the millionth will not only look like, but it will be like the first. For the permanent mold casting method employs the same metal mold for every casting poured. Dimensional variations in the castings are entirely eliminated.

Permute Permanent Mold Castings also duplicate your design with greater precision than sand castings. The rigid metal mold shapes castings accurate to \pm .010". (Accuracy to \pm .030" is standard with sand castings.) And greater tensile strength is produced by the more rapid cooling inside metal walls.

As a result of permanent mold precision, you have less metal to remove. Often, you have fewer surfaces to finish. You may be able to specify thinner cross-sections, saving metal and weight

Aluminum Industries has been making permanent mold aluminum castings for nearly 25 years. To our casting experience we add a thorough knowledge of aluminum and its alloys.



Our engineers will be glad to make recommendations on how Permite Permanent Mold Aluminum Castings may help you reduce your production costs. Submit your requirements without obligation.


ALUMINUM INDUSTRIES, Inc.

Chicago: 616 South Michigan Ave. Detroit: 809 New Center Building Los Angeles: 324 North San Pedro St. New York: 9 Rockefeller Plaza

PERMITE ALUMINUM ALLOY CASTINGS



"Right On The Nose"

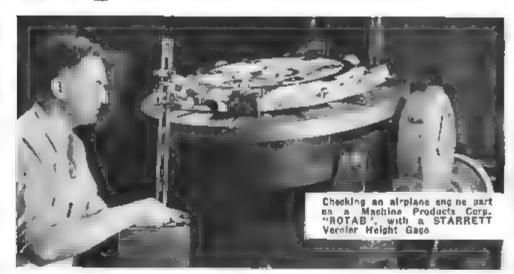

with a STARRETT Vernier Height Gage

Starrett Vernier Height Gages and Calipers, Starrett Micrometers, Dial Indicators and other Precision Measuring Tools check countless aircraft, engine and parts operations with the dependable accuracy that has won the confidence of every craftsman in the industry.

Ask your mill supply distributor for Starrett Tools.



THE L. S. STARRETT CO.

World's Greatest Toolmakers
Precision Tools , Diel Indicators.. Ground Flat Stock
Hacksaws.. Metal Cutting Bandsaws.. Steel Tapes

ATHOL, MASSACHUSETTS, U.S.A.



Use Norgren Re-usable Couplings: Replace old hose in a few seconds reusing the old coupling—it's really reusable if it's a Norgren. Simple, Sure, Quick, Economical. Can be applied and reapplied as often as necessary. In either round or hex ferrules, all sizes.

Write for complete data and prices, C. A. Norgren Co., 220 Santa Fe Drive, Denver 9, Colo.





For Your Bookkeeping Department, Service Department and Stock Room

PLUS

A Complete Service for Designing and Producing...

- CARBON INTERLEAVED *PULLOUT FORMS
- COMMERCIAL CHECKS
- PAYROLL CHECKS AND SYSTEMS
- MODERN BUSINESS STATIONERY
- DISTINCTIVE ADVERTISING LITERATURE
- FORMS OF ALL KINDS

*Potent Applied for





1866

The REYNOLDS & REYNOLDS Co.

DAYTON, OHIO

WORLD'S LARGEST PRODUCERS OF UNIFORM ACCOUNTING SYSTEMS FOR DEALER ORGANIZATIONS







RESEARCH SHOWS LETTUCE CAN BE SHIPPED BY AIR FOR ONLY 334c MORE PER POUND

Airborne lettuce sold readily at 5c per head premium in four Kroger stores in Detroit. Test shipments flown from the great Salinas-Watsonville growing areas in California to such cities as Detroit, Cleveland, Chicago. Milwaukee and Pittsburgh showed the cost to be approximately 3% c per pound more than surface transported lettuce.

THE AIR CARGO LANES OF TOMORROW are being explored today by the Edward S. Evans Transportation Research of Washington in its factual analysis of cargo potentials for all types of carriers.

A recent study of airborne lettuce—conducted jointly by the U. S. Department of Agriculture and the Evans Research—shows that this commodity, representing nearly 7% of all perishable shipments in 1943, can be flown from Western growing areas to Eastern metropolitan markets with a freshness and at a price that win the patronage of the consumer.

"Picked yesterday, eaten today" is a powerful sales appeal, first dramatically demonstrated at the Evans-sponsored Inter-American Air Cargo luncheon held in Detroit, March 23, 1944. Here, tree and vine-ripened fruits and vegetables flown from two continents, five countries and four states were served within 24 hours after picking.

The public, growers, wholesalers, retailers and airlines all will benefit from the basic research—initiated by Evans—in hauling perishables by air from growing areas to industrial markets with manufactured products for return flights. Important, too, is the study's consideration of contract carrier economies.

Evans will continue to blaze the trail in transportation research.





DETROIT 27, MICHIGAN




... to build a BOMBER

Airplane structural specifications call for a multitude of pipe and tube bending operations in which Swan Specializes among them engine ring mounts, landing gear forks, exhaust manifolds, carburetor insert tubes, directional finding loops, oil lines and hydraulic lines. Swan Engineering handles these and other close-tolerance pipe and tube bending jobs on a production basis, meeting rigid delivery dates. Swan's specialized plant facilities and modern streamlined production methods have effected savings in time and money for an impressive list of America's foremost plane manufacturers. Consult a Swan technician on your bending requirements! Our engineering department welcomes your special enquines.

BENDING IS OUR BUSINESS SWAN ENGINEERING COMPANY,

744 Frelinghuysen Avenue



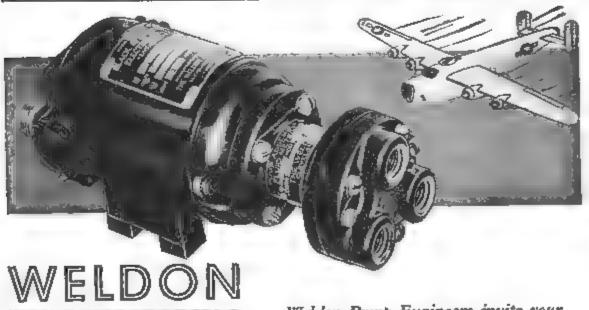

FLUID METERING PUMPS


Weldon Pump Engineers invite your inquiries on problems involving

ACCURATE METERING OF SMALL VOLUMES OF

WATER FUEL OIL ALCOHOL

LUBRICANTS HYDRAULIC OIL CHEMICALS GASES



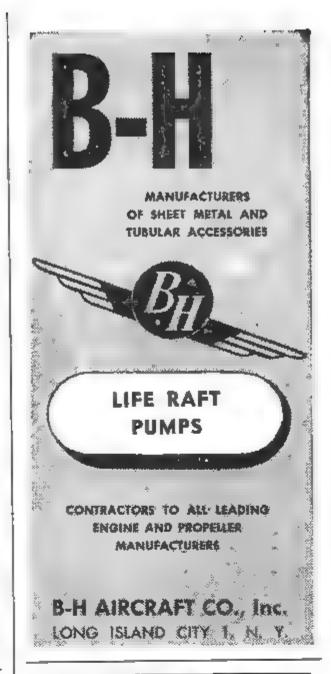



The excellence in design and the sturdy construction you find in our Tubular Micrometers is the result of over thirty years of service to the industry. Today Tumico Micrometers enjoy the world wide acceptance of discriminating work-

Prompt Delivery!

The Tokular Micrometer Company iti James, Minnasoto, II. S. Ad





light to DRIVE BY light to FLY BY

Sixty million lamps must be right. When a company starts by manufacturing a few thousand lamps and year by year, increases production to meet demands for over sixty million lamps annually, the lamps they make must be good. That's TUNG-SOL's history. Today, you find TUNG-SOL Lamps giving satisfactory performance in cars, in trucks, in tanks and in planes throughout the world. When you specify TUNG-SOL Lamps you are ordering lamps of proven quality.



TUNG-SOL AIRCRAFT LAMPS



TUNG-SOL LAMP WORKS INC., REWARK 4, R. J., Spies Offices: ATLANTA, CHICAGO, DALLAS, DENYER, DETROIT, LOS AKGELES, NEW YORK, PRILADELPHIA. ALSO MANUFACTURERS OF ELECTRONIC TUBES AND CURRENT INTERMITTORS

HERE ARE FACTS about PLASTIC TUBINGS



For a detailed addition to your reference library, write for this 20-page bound file of technical product information sheets, including test reports, detailed dimension tables and charts.

Published by Irvington, pioneers in flexible extruded plastic tubings, it illustrates and gives use data on several widely employed types. These include:

IRV-O-LITE XTE-30-a general purpose tubing resistant to weathering, moisture, acids, alkalies, oil

IRV-O-LITE XTE-130-similar to XTE-30, but suitable for use at somewhat higher temperatures

TRANSPLEX-transparent tubing thru which colored and marked wires, or fluids, are easily distinguish-

HYFLEX-a tough, resilient tubing with excellent resistance to abrasion and other physical abuse

IVI-REX-an alternate for rubber in many mechanical applications, especially where flexibility at extremely low temperatures is required.

Each of these Irvington tubings possesses high dielectric and tensile strengths; all are useful as electrical insulation over wires, terminals or groups of wires.

For your copy of this helpful data file, simply write on your business letterhead giving position or title-or, for special information on problems to which plastic tubing may be the answer, outline briefly the function to be performed and approximate operating conditions.



IRVINGTON VARNISH & INSULATOR CO.

IRVINGTON 11, NEW JERSEY, U. S. A.

Plants at Irvington, N. J. & Hamilton, Ontario, Canada Representatives in 20 principal cities



The Thor PRS-10 Pneumatic Rivet Squeezer is the most powerful machine of its size on the market. Having a rated capacity for driving 1/4" aluminum, Dural of soft fron rivots, it can also be used for dimpling, pressing and similar operations. It is available in three stylesfor "C" type yoke and with alligator laws of 1-1/2" or 2-1/4" reach.

its balance in conjunction with properly located throttle lever, and its finely graduated control, enable the operator to properly align the plunger or anvils over the rivet before applying the final squeezing stroke.

The design is streamlined, completely enclosed, air-actuated power and return strakes aliminating springs; full roller bearing construction. No strains are transmitted to the aluminum casing, which serves only as a locating medium and housing for the powe transmitting mechanism.



Portable Pneumatic and Electric Tools

INDEPENDENT PNEUMATIC TOOL COMPANY



600 W JACKSON BOULEVARD, CHICAGO 6, ILL. **Branches in Principal Cities**


For complete technical data and prices write today for Bulletin No. P-1232.

AVIATION, December, 1944

R vet Squeezaz

of 21/2" reach.

with Alligator Jaws

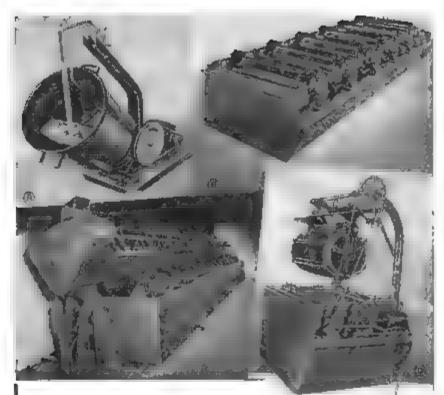

- A. The Udylite Handiplater
- B. Multiple Cylinder Horizontal Barrel
- C. Udylite Automatic Barrel Plating Machine
- D. Udylite Horizontal Barrel with Hoist
- E. The Udylite Multi Purpose Barrel



Specify UDYLITE Equipment for Bulk Finishing of Small Parts

In metal finishing equipment the name UDYLITE stands for the best. Udylite's complete line of equipment for the metal finishing plant is practical and dependable—designed by engineers who are thoroughly aware of the problems and requirements of the trade.

If you require specially designed equipment not found in our standard lines our experienced engineering staff will gladly help you work out the proper answer to your needs.

The respect for UDYLITE equipment is nationwide—the advantages of Udylite's unique "continuing service" in your own plant are worth your consideration.

Your inquiries are invited

THE UDVITTE CORPORATION

SEEL PAST SEARS SOULEVARD & SETTOIR IS, MICHIGAN.

"REPRESENTATIONS IN ALL PRINCIPAL SITTES.



No. 65R—Perfect threads on 1" to 2" pipe with one set of dies



• Start your post-war right—with a threader you'll enjoy using. No bother changing dies in this product — spin it up, spin it down and it's set for micrometer perfect threads on 1", 11/4", 11/2" or 2" pipe. A quick turn of gauge plate sets workholder, no bushings. Threads with surprisingly little effort. High-speed steel dies; rugged steel-and-malleable construction. Ask for it at your Supply House.

THE RIDGE TOOL COMPANY, ELYRIA, OHIO



Productor TO SERVE THE EXACTING STANDARDS OF AMERICAN INDUSTRY!

Meeting Your Product Requirements

Acadia Synthetics are engineered for end use! Whether your need is for resistance to air, light, petroleum, ozone, age—or for properties that are found in natural rubber, and some that are not—Acadia has synthetics to meet these requirements in any combination! Name the characteristics, or combination of characteristics you desire—Acadia has a synthetic compound for your product!


Acadia engineers are prepared to help you determine the Synthetic Rubber compound best suited to your needs for products of war or of peace—without obligation on your part.

Write today for full engineering data on Acadia Synthetic Products.



An important item in molded synthetic rubber shapes in mold design. Acadia's engineering and technical stall have the necessary know how" to design efficient and precise molds.




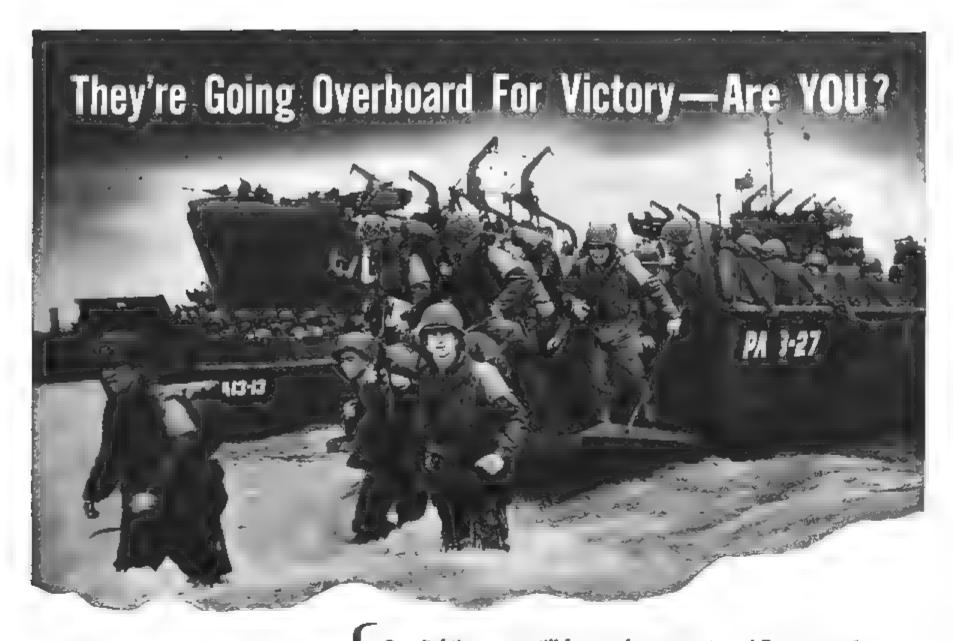

USE 8-POINT PLAN FOR AN OVERBOARD DRIVE IN THE 6th WAR LOAN!

NOV. 20th TO DEC, 16th

Our fighting men still have a long way to go! But-your plantwide selling of the 6th can do much to shorten their embattled miles-lessen the price they so willingly pay for victory! Join the coast to coast parade of patriotic firms that are assuring an "overboard" showing in the 6th by following through on every point in the 8-Point Plan.



Right at the start, establish a Quota for each department - and every employee.

Arrange frequent Meetings of Captains, highlighting importance of their work effective sales methods-and need for painstaking study of Treasury Booklet, Getting The Order.



Make definite Assignments to those best equipped to arrange music, speeches, ra.l.es, competitive progress boards and meeting schedules,

Issue Individual Pledge Cards—made out in the name of each worker and providing for both cash and installment purchase.


Resolicit! This is the secret of "overboard" War Bond subscriptions, Your State Payroll Chairman has a special Resolicitation Plan for you to put into action near the end of the campaign.

Give generously of your Advertising Space to drive home the War Boad story.

AVIATION, December, 1944

The Treasury Department acknowledges with appreciation the publication of this message by

This is an official U.S. Treasury advertisement-prepared under auspices of Treasury Department and War Advertising Council

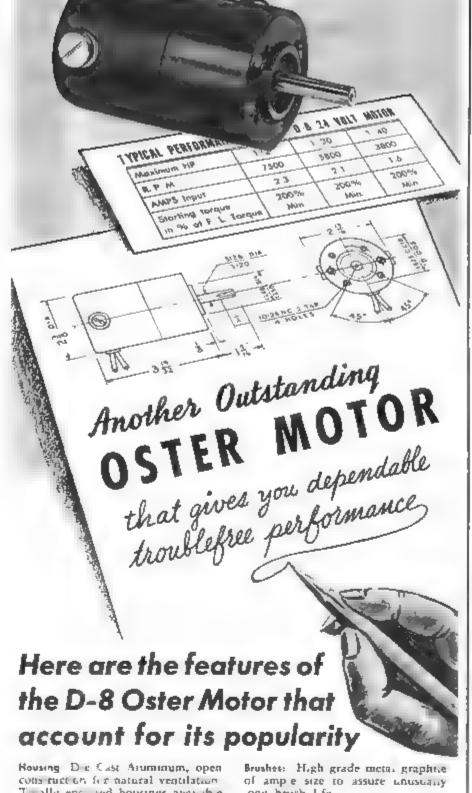

Tirally enc. sed housings available with reduced motor ratings

Finish: Black Anodized

Waight I pound, 14 nunces.

Bearings. High quality single shielded ball bearings lubricated with grease sund for any specific appleation bearing housings fitted

Mounting: Standard 11/4" Dia gir



long brush life

Windings Available in shunt, series and spirit series reversible, 12 and 24 V, ntermittent and continuous duty. Also furnished with series

Temperature Rise 55° C Maximum frame temp, rise at rated load.

Modifications Special shaft exten-sions mounting armingements, leads, etc . . also furnished for opera-tion in high ambient temperatures and high altitudes.

All data and ratings

expect?


Let us help you fit this or other Oster Motors to your requirements.

John Oster Mfg. Co.

get the facts on

- · freedom of the air
- · new air routes, airlines, and air-
- · the possibilities of sky-freighting
- the aviation of the future

This book gives a concise and logi cal presentation of the new developments and problems we can expect in connection with tomorrow's aviation world. Specific examples illustrate the progress that has been made in each direction, the difficulties encountered, and the efforts being made to iron them out. Here-in practical language and realistic terms- are the steps



by which aviation will arrive at its real maturity.

THE COMING AIR AGE

By R. M. CLEVELAND

Director of Aviation Advertising, New York Times; and L. E. Neville, Editor, Aviation 410 pages, 51/2 x 8, illustrated, \$2.75

Beginning with a discussion of the probable status, both technical and financial, of the industry when the war ends the book goes on to discuss the geography of the air age, freedom of the air, airlines of tomorrow, and sky freighting. The giant superplane the helicopter the rocket ship, and new power sources as well as the more usual craft, are described. Finally the effect of the air age on education is treated from both the national and international viewpoints

Answers these vital questions:

How much of our present aviation equipment can be used for policing, occupation, and ferrying supplies? What is the safest way to dispose of the surplus?

What problems of fuel and finance stand in the way of the establishment of world air trade?

How much control of the air can be ceded without impairing the trading value of each nation's air space?

How will the emergence of the landlocked world trade port alter the distribution of population? The helicopter situation—how much can we really

		_				
	McGRAW	HILL	ROVA	L cou	PON	N
	McGRAW-HILL BOO	OK CO., 330 W	V. 4#nd 81	., New 1	York 18,	N. E
	Send me Cleveland a exam nation on appr cents postage or re orders.)	ova! Ir 10 d	ays I wir	l send \$	2 75. plu	ia lei
:	Zan.6		+ 1			
	A dress					
	City and State					,
	Pos tion				•	
	Compan; (Broks sent	on approval	η Un ted	States		12-4

AVIATION, December, 1944

Don't Risk Solder Failure Because of WRONG FLUX



Be Sure with KESTER

- Chemically and physically correct flux is imperative for tight. permanent solder bonding. Oxides on metals must be dissolved and the solder must alloy with the metals in a way to prevent
- Different solder bonds demand different fluxes. One flux will not do for all, if soldered connections are to resist shocks, vibrations, bending, twisting, contraction and expansion without failure.
- Delicate electrical connections, for example, demand a flux that is a poor conductor, that is non-corrosive, and that has no tendency to collect moisture, dust or other foreign matter. Seams of various design each require a different flux. So do spot saldering operations. And there are correct fluxes for al. of the myriad materials used in industry


Kester makes them all!

- Kester Fluxes protect you against solder failures due to improper flux. They represent 45 years of practica, experience with solder and fluxes, and extensive laboratory research. Kester has pioneered many important flux improvements. The complete line includes the right flux for any solder job
- · You can be sure with Kester Fluxes sure of tight, permanent solder bonding Kester engineers are at your service.

* BUY WAR BONDS *

KESTER SOLDER COMPANY 4206 Wrightwood Ave., Chicago 39, Illinois Bastern Plant Newark, N J Canadian Plant Brantford, Ont.



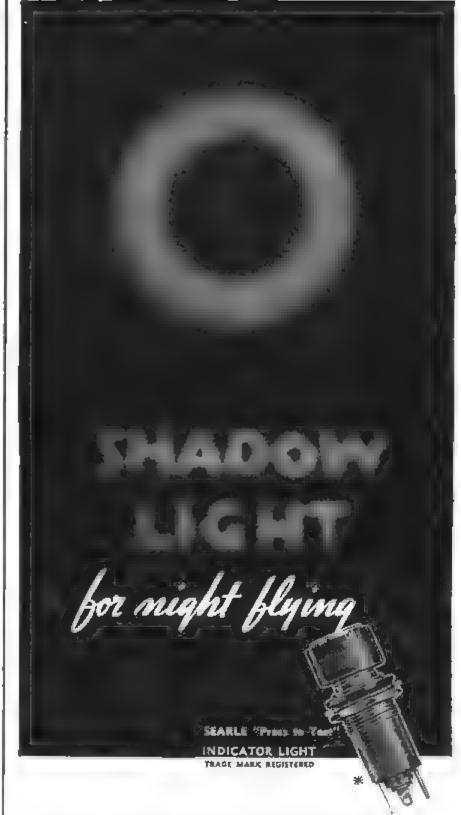


The pilot's vision remains at all times completely unaffected by a Scarre Indicator Light Its positive dimning adjustment for night flying makes the Searle highly preferred. Ray diffusion is so complete that absolutely no intensity remains, but rather a pale, shadows phosphorescence This is a patented feature found only in Searle lights. Other Searle advan-

tages are its volume light for daytime flying, its unique construction which permits use of either screw-base or bayonet type bulbs, both of which are easily and quickly discharged by mere fingertip pressure, when necessary. Available with jewels of any standard color. Made in diameters of 3/8 . Can replace any % single hole mounting light. Write or wire for full details

"D S PATENTS APPLIED FOR



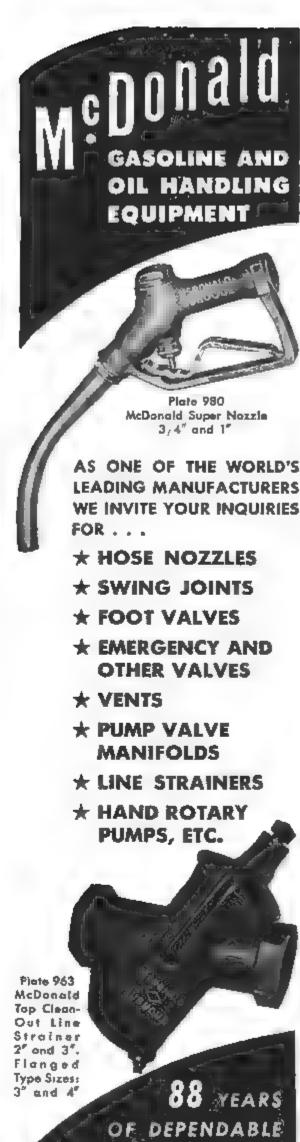





'I didn't want his money-I just tried to take his copy of TRUE Magazine."

Advertisement

ARMSTRONG



DROP FORGED **CLAMPS**

> ARMSTRONG Drop Forged "C" Clamps come in six

types, each in all sizes The ARMSTRONG Heavy Duty "C" Clamps with long hubs, extra large alloy steel screws and drop forged, heat treated bodies. which because of their extra strength and stiffness, rigidity and fine machining are generally recognized as the finest clamps obtainable. Other types include Medium Service, Light Service, Extra Deep Throat and Tool Makars "C" Clamps - all with drop forged, heat treated body and special steel


scrows, all quality clamps.

Write for Catalog C-39a

ARMSTRONG BROS. TOOL CO.

"The Tool Halder People" 348 M. Francisco Ave., Chicago 12, U.S.A. Eastern Warehouse & Sales Office 199 Latayette St., New York, N. Y.

Aviation Annual



This book is an up tothe-minute, strikingly illustrated review of American aviation, civil and military, in an historic year, plus a precision preview of the gigantic growth to come. Every chapter covers a specific phase of aviation air progress, with an introduction by the country's leading aviation expert in that particular field. It reveals the significance of American air power at a moment when American planes are setting the pace on a dozen battle fronts. Top authority, accurate information, and supreme value for air fans on every page, in the newest and best volume of an increasing popular series. With 64 pages of balttones.

PARTIAL CONTENTS.

Important: The 1945 ANNUAL is com-pletely new and different from the 1944 ANNUAL in content.

Introduction by

. . . and many other absorbing.

THE AVIATION

Edited by REGINALD M. CLEVE-LAND, Member of the Staff of the N.Y. Limes, Consulting Editor and Director of Aviation Research Associates; and FREDERICK P. GRAHAM, the N.Y. Limes London Bureau. Both Mr. Cleve-land and Mr. Graham are former Avia-tion Editors of the N.Y. Times.

To your bookseller or DOUBLEDAY, DORAN & CO. Dept. AV12, Garden City, N Y.

Please send me copies of Till AVIATION ANNUAL OF 1945, by Region M. A. eveland, and Proderick P. Graham M & eveland and inter, \$3.75 a copy. □ 1 enclose remittance of \$
 .1 Send C O D.

Address

How are you at Chopping Trees?




No, this is no joke. Many businessmen have volunteered to aid the paper shortage by spending vacations from their companies in the timber country, helping out on the man-power problem in the paper pulp industry.

Not that you have the time to do this. Nor that tree-chopping is exactly in your line. But, until the man-power shortage in this vital industry is over, until our armed forces no longer are spread all over the world where food, ammunition and medical supplies must be shipped them in paper protection wrappers, there is a chopping job you must do. You must chop the use of paper in your business.

Sure, you've done plenty of this in the past months. But right now the need for paper is greater than ever. So the government asks you again to examine paper usage in your firm, see if you can't make even further savings.

And don't forget that baling wastepaper and sending it to a reprocessing plant is a most important part of the paper conservation job.

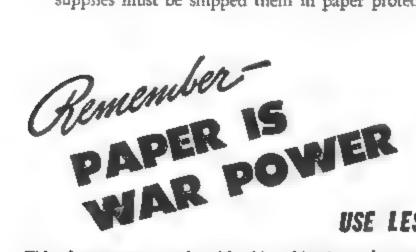


140



USE LESS PAPER - SAVE ALL WASTEPAPER

This advertisement contributed by this publication and prepared by the War Advertising Council in cooperation with the War Production Board and the Office of War Information.

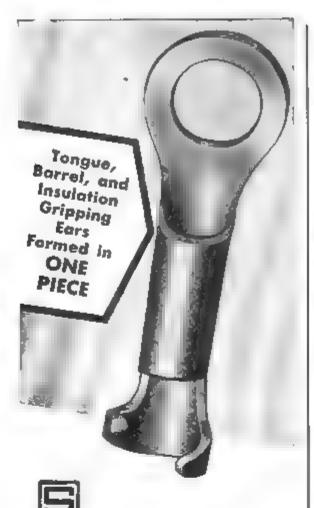

This One-Piece

Solderless Terminal

Offers Greater Mechanical Strength Plus Higher Conductivity — at Lower Cost

Sherman UNI-CRIMP Solderless Terminals have been designed for the specific purpose of increasing production and insuring belier performance — at a lower cost.


Their simplified one-piece design is a distinct improvement from every standpoint, making them stronger mechanically, more efficient alectrically, easier to install and more economical.

They are made from fine grain, spacially rolled, pure electrolytic copper, of the highest conductivity obtainable. The entire inside of the barrel is serrated, so as to increase the contact area, grip the circumference of the wire, and form the strongest, most permanent connection.

Let us show you how you can switch over to this improved terminal without any changes in your present set-up — without interrupting production. Write today for Bulletin UC-1,

H. B. SHERMAN MFG. CO. Buttle Creek, Michigan

The Sherman
UNI-CRIMP
Solderless Terminal





"SILENT HOIST" EQUIPMENT

CAPSTANS
WINCHES
HOISTS
POLE DERRICKS
TRUCK CRANES
The KRANE KAR
The STEVE-KRANE
The KRANE KRAWLER








A Size Photo

I Size Photo

I



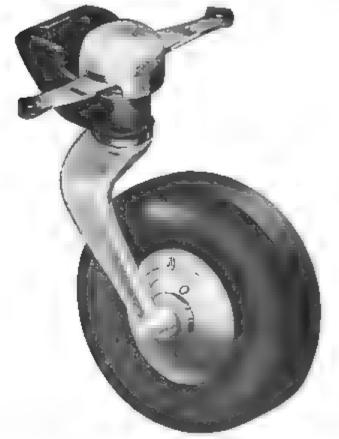

• You have long had the need. Three years ago Scatt Engineers began to design build and test automatic steerable and full surved tail when accombiles to meet that need. Today—the new Scott "3-24" Tail Wheel Assembly is a perfected and practical reality—ready for service on assert) all makes of light alreraft.

reviding the inherent safety and maneuverability in taxling of the steerable type, including more effective control in strong cross-which this new model also provides the advantages of the full swivel assembled easier ground handling . . . sharper taxling turns protection against damage to parts from severe usage . . .

Thereughly tested for field service, the Scatt "3-24" stands out as an advanced development embodying the greatest number of potential service hours over built into a tall wheel assembly.

- Palanted Automatic Mechanism— dependants, long-wearing, pro-tected by steamlined steal cap.

- Bingle Arm fork of drap forged throme allay, gives maximum freedom from mud and for ac
- Wheel: High-strength aluminum alloy cartings rigidly tocked withree AN boits. Large Tank-Roller Scarings, greate packed to long life. Felt greate state and
- Tire: 5 x 2 solld cushion with steel wire boad. Can't come off. Ó

Available from authorized Scott Distributors or from Scott Charlered Oealers

Get Details! Here's post was thinking too---a practical, profitable dealer program for post war selling. Full explanation on request




SCOTT AVIATION CORPORATION 714 Erie Street Lumaster, N. Y.



spacious for safe efficient workmanship in factories. shops, and a rports where amplanes are balt or mainta ned

Our one experience in the thoular scattoiding business slating or a spos . We will quote on platform and dol vege prient ocording to your special and havidue recurrenents. A dress National DEFARTMENT RANG ORIGINATION, P. SBUR I (22), pa. National a stributors for American Tundar E evator Company)



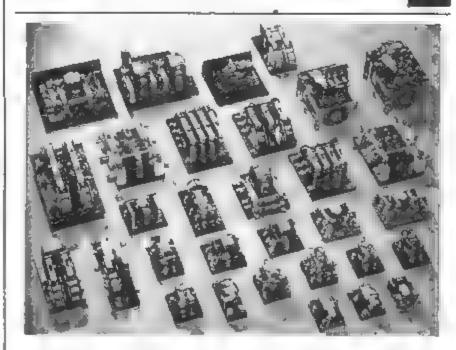

RELAY BULLETINS

These Bulletins are available describing light, intermediate and heavy duty relays in various types and contact combinations. Send for the data bulletins of interest to you.



RELAYS - RESISTORS - RHEOSTATS Electric control (WL) devices siece 1892.

WARD LEONARD ELECTRIC CO., 57 SOUTH ST., MOUNT YERNON NEW YORK

LINEAR "PAR" PACKINGS

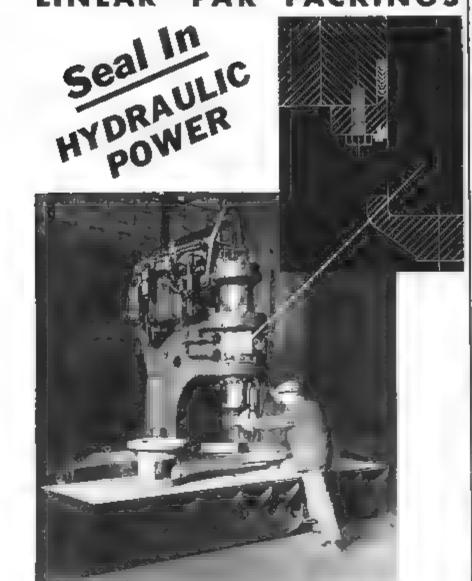


Photo & sketch cours may be established Street Fabriday & Start in minimary Berusboro, Pa

Oil is the hydraulic fluid which powers this Birdsboro Straightening press . . . C-Housing type. And again, Linear was called upon to furnish the packing rings which efficiently fit into the precision design of the actuating mechanism. The main ram delivers 50 tons pressing force under 3000 pounds per square inch pressure.

Linear "Par" packings effectively seal in the vital hydraulic power from source to point of application. All the power produced by the press is delivered at the ram aided by Linear's fluid-tight, thoroughly dependable seal . . . the seal which is the direct result of Linear "Par" packing's precision design, exacting production and meticulous inspection.

Unaffected by oil, impervious to any fluid employed as a pressure medium, Linear "Par' packings are manufactured from six compositions each for a specific service. Engineers of the most modern hydraulic equipment have selected "Par" packing - confident of its ability to aid hydraulically actuated mechanisms in delivering peak performance.

The consultation of Linear engineers is available . . . ask Linear to cooperate with your designers in stepping up the efficiency of your hydraulic products. Sample packings for your experimentation upon request.



STATE ROAD & LEVICK STREET TACONY, PHILADELPHIA 35, PENNA.



HELP SEND THEM SKYWARD

> Williams tools do their part in making our hard-hitting fighters and powerful hombers rise to the skyfronts in perfect condition.

> On the production lines . . in the hangars ... at the frontline repair shops on land and sea, Williams tools prove their reputation for absolute dependability a reputation established in over sixty years of successful tool making. J. H. WILLIAMS & CO - BUFFALO 7, N Y.

WILLIAM

How to Stort and I se Wreather contains much valuable informat in Write for it


DROP-FORGINGS & DROP-FORGED TOOLS

to help young readers get more out of aviation

I RES a prize volume to help budding young aviation enthusiasts enliven their aviation "fan reading" or their playtime world of makebelieve fling

A new dictionary giving a we, the of aciation definitions and istormation in pleasing and understandable style.

Jus Published!



THE AVIATION DICTIONARY for BOYS and GIRLS

Edited by LESLIE E. NEVILLE

Pictures by Gregor o Prestopio

192 pages, 6 x 9, 200 illustrations, \$2.00

This book gives most of the words needed in order to understand the important facts about planes, how they work, and why they fly. There are also some words less commonly used but of special interest in reading books about the irore technical side of aviation. The important terms of military aviation are given, together with those used in navigation and the science of weather, and there is even sone fher slang

CONTENTS


- Over 500 aviation terms, things jects covered
- About 200 two-cater Mustrations that explain
- Sections illustrating and describing various types at military planes; plane designations, evic-tion insignic
- Explanation and exam-ples of map projections navigators use
- Supplement of three-way views of bombers, fighters, and cargo planes
- Cancise history of avi-ation

interestingly and accurately written

This is a very informal sort of diet mary. The people who put a together wanted it to be as much as possible like a conversation be ween the reader and a person who has perty of time is a issuer quest as If you ask. What is a flag you probably wish to know more than hat A flag is a harged rear section of an arrow. You would like to know what a flag does and why is as reeded and when it is self-ballous were actually written and rewritten during conversations with a prior, and engineer, a precision, and a meteorologist. Then the firshell explanations were gone over once in one to make them as accurate a possible. This is a very informal sort of dietonary

Attractively illustrated


The art of has bestrated in bright, two-color drawings about two undeed of the things that are better rederstood if seen. The arawings, wherever possible, not only construct the waves but show things in act on and how they work

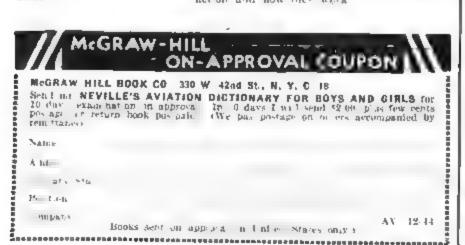





FELT PRODUCTS MFG. CO., 1516 Carroll Ave., Chicago 7, Illinois

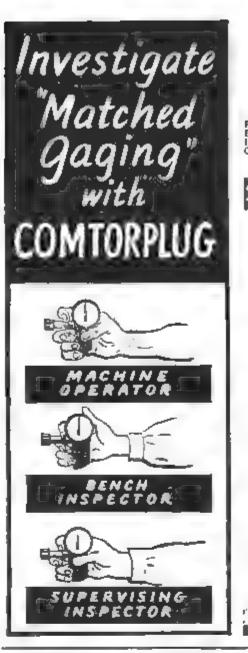

PLIER5

UTICA*

*TOOLS

Checks precision bores to fractions of .0001 COMTORPLUG

> Comforplug's unique simplicity permits " Matched Gaging on production of precistion bores Operators bench no spectors and supervising inspectors at use the same pracision gage, speeding and improving production and decreasing rejects. To fractions of 000 1 Comforping shaws size, out-of-round, front or back taper bell mouth etc. Self a igning and centering Not a passing reading. This equipment is now read by

> > Request Sulletin 29

THE COMTOR CO. 88 RUMFORD AVE. WALTHAM, MASS.

No. 654

Long Chain Nose Side Cutting Plier

FOR EVERY NEED

for More Tool Hours

UTICA Pliers and Adjustable Wrenches

are made to do tough jobs easily and good mechanics know they stand up un-

der long, hard usage. Sold only through

our distributors who are assured now as


always of our full support. . . . Send for

Aviation Bulletin No. 41.

BUY MORE WAR BONDS NOW!

UTICA DROP FORGE & TOOL

UTICA/ NEW YORK

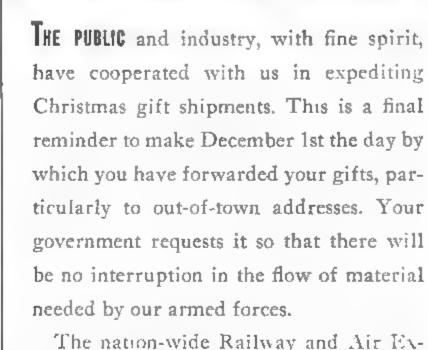

The nation-wide Railway and Air Express Service welcomes its annual responsibility of making Christmas a happy occasion for millions by delivering shipments safely and on time. Remember, please, to wrap carefully - address clearly - call us early.







AVIATION December 1944 AVIATION, December, 1944





MOVED?

If you've moved recently or are planning a change, let us know now so that copies of Aviation will continue to be delivered to you promptly. Use this coupon or a penny postcard.

Your name

Old address

City and state

New address

City and state

cmpany

Your title

MAIL TO: McGraw-Hill Publishing Co Circulation Department 330 West 42nd Street

New York 18 New York

LOOKING AHEAD

If you are, or will be, active in aviation manufacture, distribution, field operation or flying, get in touch with us—now! Right now, we are looking ahead—planning—acting. Doing our full war share, but tightening up our galusses for the time when private aviation will need all we can give. Our engineering and sales departments are ready to work with you now. Use them—now!





for dependable service, specify TUTHILL Small PUMPS

Precision manufacture speaks for itself in these
Tuthill small industrial pumps. Midgets in
size these internal-gear rotary pumps are ideal
for hibrication, hydraulic, liquid
transfer and coolant service. Save space,
material and money. Capacities from 33 to 3
g.p.m. at pressures up to 400 p.s.i.
Mechanically sealed. Ring or foot mounting.
Write for Catalog on small pumps.

Turbill Pumps are serving Army & Nevy

TUTHILL PUMP COMPANY

939 East 95th Street + Chicago 19, Illinois



UNITED NATIONS' FLYERS are using it for SAFER LANDINGS

A one-hand turn and a tap on the single frontal disk instantly releases the harness . . . leaving the flyer entirely free. Accidental release is impossible before disk is "set" for action.

All United Nations' Air Forces for years have used IRVIN as standard equipment . . . and now the Irvin "Single-Release" harness is acknowledged as superior for all landings. IRVIN, as always, leads in Safety.



& Ser Tap for Releas

IRVING AIR CHUTE CO., Inc.


Main Office: 1670 Jefferson Ave., Buffalo 8, N. Y.

Complete Factories in Buffalo, N. Y., Glendale, Calif. (1500 Flawer St.), and Lexington, Ky., U. S. A.—Canada, England and Sweden . . . All Serving the United Nations' Air Forces.

TY MORE BOND

ARNO TUBE SEAL No. 700



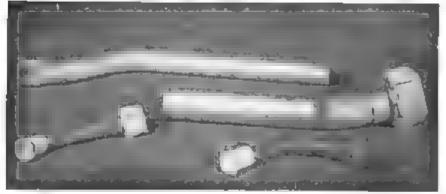

A new, quicker, more reliable method for sealing all sizes of tubing. Made to engineered patterns with fiber disc and special quality adhesive. Easy and quick to apply. Can be removed in an instant, no residue.

> Write for samples and price lists of Arno Tube Seals and Industrial Tapes



ARNO ADHESIVE TAPES, Inc. MICHIGAN CITY, INDIANA



"World's Largest Producer of Washers 2143 SOUTH BAY STREET MILWAUKEE 7, WISCONSIN





Advertising men agree—the ist is more than half the story. McGraw-Hill Mailing Lists, used by leading manufacturers and industrial service organizations, direct your advertising and sales promotional efforts to key purchasing power. They offer thorough horizontal and vertical coverage of major markets including new personnel and plants. Selections may be made to fit your own special requirements.

New names are added to every McGraw-Hill list daily. List revisions are made on a twenty-four hour basis. And all names are guaranteed accurate within two per cent.

In view of present day difficulties in maintaining your own mailing lists, this efficient personalized service is particularly important in securing the comprehensive market coverage you need and want.

Ask for more detailed information today. You'l probably be surprised at the low over-all cost and the tested effectiveness of these hand- picked selections.

DIRECT MAIL LIST SERVICE Direct Mail Division

Ms GRAW-HILL

McGraw-Hill Publishing Co., Inc.

330 West 42nd Street

New York, 18, N. Y.

TITHOUT interfering with war work, we can now accept the machining of experimental parts for peacetime products - also production work involving the machining of small

tots of parts to close tolerances.

■ Write Us Concerning ■ Your Requirements!

GOYRO-NELSON CO.


1931 Antoinette

Detroit 8. Mich.



PRECISION

... IN WAR AS IN PEACE

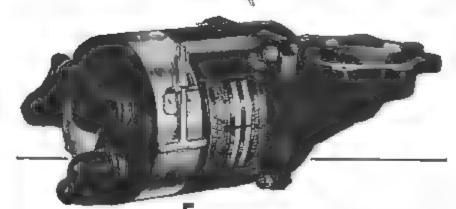

OR over 30 years. Eureka has been building electric motors to the highest standards of craftsmanship and precision. Today, control motors such as this* are used on the fighting planes of the United Nations. Tomorrow, they will help to broaden the skyways of peace.

"Motor illustrated manufactured for Echipse-Pioneer Division, Bendix Aviation Corporation



FITZGERALD GASKETS FOR AIRCRAFT ENGINES

GASKET CRAFTSMEN FOR 38 YEARS

Write for information

THE FITZGERALD MANUFACTURING COMPANY TORRINGTON, CONN.

BRANCHES CHICAGO AND LOS ANGELES CANADIAN FITZGERALD, LTD., YORONTO

FITZGERALD **GASKETS**

AIRCRAFT TEMPERATURE CONTROLS

for Today and Postwar

Temperature Controls offer unique advantages to aircraft designers and manufacturers now and in the postwar period. These controls operate

flaps on airplanes. They reduce the human element in such operations. They provide all hi-g benefits because they operate in any position regardless of vibration, change of motion or acceleration. Operating hydraulically, they give instant response on liquid or air-cooled engines. If you have a temperature control problem, write us.



Branches: Atlanto, Baston, Chicago, Kansas City, Cleveland, Dallas, Denver, Detroit, Philadelphia, New York, San Francisco

Hellcats and Plowshares...

The success of our Navy fighting planes brings a gratifying recollection of early engineering on gearing problems for both Curtiss and Grumman - the same engineering intelligence that today is planning for the plowshares of tomorrow while we are still at work on the machines of war-

DIEFENDORF GEAR CORP., Syracuse, New York

diefendorf *** GEARS



When You Need Quick Action . . .

on Opportunities available or wanted in AVIATION

Use

The "MARKET PLACE" OF AVIATION

Published Each Month



Mercury skill, developed by long experience in fabricating sheet aluminum, has made this company a favored source of supply for auxiliary fuel tanks, both for bomb bay and exterior mounting.

MERCURY AIRCRAFT INC.

ARCHAPT SURFACES * PLNIL TANKS PARTS - ACCESSORIES

JACOEL

Splicing Tool No. 10

Full swivel aspecially designed for splicing aircraft

contro cables Wil accom-

modete thimbles or bush-

ings up to 3/16 inch in

Jacoel Cable Splicing

Equipment Co.

1514 Main Street Buffalo 7, N. Y.

diameter of cable.

at The Credle of Aviation HAMMONDSPORT / NEW YORK

X-RAY and GAMMA-RAY PROTECTION

WE supply protection and cabinets to meet U.S. Bureau of Standards requirements. Plans and Specifications on request.

WRITE FOR SAR-RAY CATALOG A-4

AMONG THOSE WE SERVE!

Brooklyn Navy Yord Mortin Bomber U. S. Bureou of Eclipse Aviation Bell Aircobra Fairchild Aviation U.S. Government Bethlehem Steel Picationy Arsenal

Standards Agencies and War Flants

OTHER INSTALLATIONS ON REQUEST

BAR-RAY PRODUCTS, INC.

Office and Mills

209 25th STREET, BROOKLYN 32, N. Y. TEL: SOuth \$-5225 - AGENTS IN PRINCIPAL CITIES

Solves the Problem of Mailing List Maintenance!

Probably no other organization is as well, equipped as McGraw-Hill to solve the complicated problem of ist maintenance during this period of unparalisled change in industrial

McGraw Hill Mailing Lists cover most major industries. They are compiled from exclusive sources, and are based on hundreds of thousands of mail questionnaires and the reports of a nation wide field staff. All names are guaranteed accurate within 2%.

When planning your direct mail advertising and sales promotion, consider this unique and economical service in relation to your product Details



McGraw-Hill Publishing Co., Inc. DIRECT MAIL DIVISION

330 West 42nd St., New York, 18, N. Y

BEARING GRIND

for HEAVY-DUTY Service



BALDOR GRINDER No. 7106, ball-bearing, and substantially built for heavy-duty, pra-cision grinding; againped with Capacitor Type, 1/2 h. p. Motor (110 volts, single phase, 3400 r p.m.) WON'T SURN OUT 7" t 1" wheels; large, adjustable, cast from Tool Rests. Net weight, 61 lbs. Fully Guaranteed \$20.00 \$30.00 for a year

> Bench & Fedestel Types ASK FOR BULLETIN 319

BALDOR ELECTRIC COMPANY 4380 Duncon Ave. St. Louis 10, Mo.

BALDOR GRINDERS built by Motor Specialist

WHERE TO BUY



PLASTICLEAR CLEANER

cleans and polishes all types of clear plastics, such as Plexiglass, Lucite, scente, a trates, removes grease, dirt, bugs, and prevents new fore,go matter from adhering to the puiste, surface. Also cleans, polishes, and projects all types of chrome and painted surfaces (such as variabled surfaces of propellers), removing rost, statos, and resturing or ginal brilliance. Clearer

PLASTICLEAR SUPER-HARD WAX

just apply it, wipe it, and it is done. Leaves a high melting point, microscopic super-hard transparent film that prevents sun is rays from planing plan it thus preserving the classes. Personant seals and protects any plason or painted surface. Easy to use from rearing plass to thus preserving the clarity Protection is afforded by perfect bonding of the film to the cleaned surface. Can be applied to all types of painted surfaces. The film is impervious to gasonine, oil, and salt water. Write on your letterbead for a generous sample.


FEDERAL

SKI :



Specializes in Solders


Fluxes, Welding **Brazing Compounds** SILVER SOLDERS & FLUXES



L. B. ALLEN CO., INC. 6753 Srys Mowr Ave. Chicago 31, Illinois





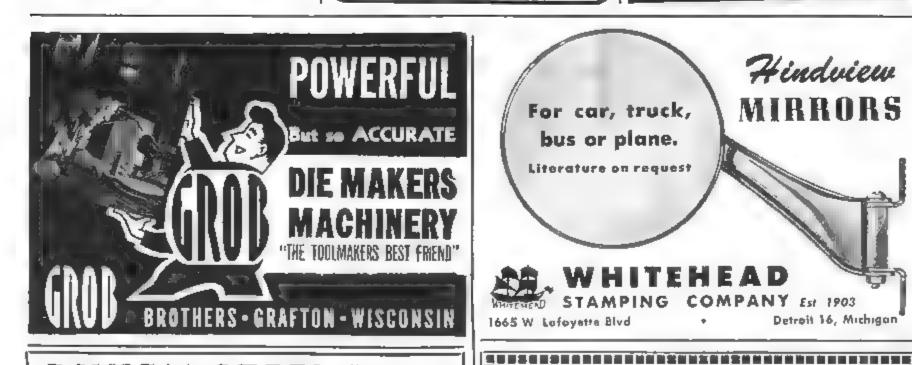

DYKEM STEEL BLUE

LOSSES making dies

simply brush on right

at the beach; ready for the layout in few minutes. The dark blue background makes the

& templates

scribed layout lines show up in sharp relief, and at the same Write for full information

THE DYKEM COMPANY, 2303-A North 11th St., St. Louis &, Mo. in Canada; 464 Panide Ave., Toronto, Ont.

Hindview MIRRORS For car, truck, bus or plane. Literature on request

STAMPING COMPANY Est 1903

1665 W Lafeyette Blvd

Detroit 16, Michigan

changed

Let us know so that we can keep copies of Aviation coming promptly.

TO Circulation Dept , Aviation 386 West 42nd Street, New York 18 N Y.

Old Ad aresa

450 AVIATION, December, 1944 AVIATION, December, 1944

AVIATION'S MARKET PLACE

USED PLANES, ENGINES AND PARTS FOR SALE, TRADE OR WANTED SPECIAL SERVICES OF DISTRIBUTORS, FIXED BASE OPERATORS, ETC.

(Sales and Service-Storage-Repairing-Charter-Aerial Towing or Exhibitions-Special Instruction) EMPLOYMENT - SELLING - BUSINESS OPPORTUNITIES: OFFERED OR WANTED

RATES: UNDISPLAYED, 10 cents a word, minimum \$2.00 (Position Wanted: 1/2 the undisplayed rate; box number counts as 10 words.) DISPLAYED \$7.25 per inch. Contract rates on request.

Write AVIATION "Classified", 330 W. 42nd St., New York 18, N.Y.

Phone: MEdallion 3-0700-Ext. 556

NEW ADVERTISEMENTS received by December 20th will appear in the January issue within space limitations

25 POSITIONS

Start NOW — Continue

POST-WAR!

The U. S. Navy has war materials contracts with us extending at least through January 1, 1946. As soon after that as the Japs are licked, we will embark on a post-wor production program to supply both U. S. Navy and civilian needs for which we have been making marketing and sales studies for over a year. This is, therefore, an opportunity for qualified men to get set for the future with an organization of the highest standing in the Engineering and Manufacturing field.

We are able to offer immediately at highest rates, on a 521/4 hour week basis with 11/2 for all time over 40 hours weekly, 25 positions to the following:-

ASSISTANT PROJECT ENGINEER (1)

Engineering degree or equivalent engineering training, plus not less than 5 years' aircraft engineering experience.

4 years' aircraft, plus engineering college degree or suitable equivalent.

LAYOUT DRAFTSMEN (10)

4 years' drafting experience, plus 2 years' engineering college or suitable equivalent.

STRESS ANALYSTS (3)

Engineering degree, plus 2 years' stress experience.

CHECKERS (2)

452

2 years' engineering callege or equivalent, plus at least 3 years' aircraft drafting experience. Able to get along with fellow workers, Accurate and stendy.

DETAIL DRAFTSMEN (4)

High school education with one year drafting training or experience.

IF YOU ARE AVAILABLE

under the rulings of the War Manpower Commission and can meet the requirements of any of these positions, communicate of once with-

C. J. Libby

EDO AIRCRAFT CORPORATION

Terminol Building, Flushing, New York

POSITIONS VACANT

AIRPORT MANAGER wanted. Experienced man wanted to take over all operations of nunicipal airport in mid-western city of 52,000 population. State qualifications, financial status, references, what equipment you have, etc. Reply immediately. P-895, Aviation, 520 N. Michigan Ave., Chicago 11, Ill.

AERONAUTICAL ENGINEER for chief engineer position. Must be experienced in carry-ing new design through procedure for ATC Must be stress analyst. Permanent position for right man. Johnson Aircrafts, Inc., P. O. Box 4306, Fort Worth 6, Texas.

POSITIONS WANTED

PILOT WORLD War II veteran, desires posi-PILOT WORLD War II veteran, desires position in aviation operations or as pilot. Private
party or industry. Have 2000 hours piloting
twin-engine bombers and fighters, no accidents.
Held duties of squadron commander and group
sperations. In Ariny five years. Graduated Kelly
Field 1939. Rank, Major. Age 27. Health excellent, Married, Overseas 3 years. Experienced
is testing and developing alrelanes. Capable
and aggressive. PW-892, Aviation, 520 N. Michigan Ave., Chicago 11, 111.

AERO ENGINEER, thirty-five years of age, with ten years of specialization in propeller work. Experience includes design and testing of propellers and related parts and design of of propellers and related parts and design of testing equipment for experimental and production units. Theroughly acquainted with military propeller and Army Air Forces requirements and procedures. Presently employed as chief engineer of plant manufacturing propeller accessories. Extensive experience is engineering and operational phases of all United States and some foreign propellers. PW-826, Aviation, 520 N. Michigan Ave., Chicago 11, Ill.

AERONAUTICAL ENGINEER: Sixteen years design experience to aircraft. Desires executive position in established firm with postwar program. PW-897, Aviation, 520 N. Michigan Ave., Chicago 11, Ill.

WORK WANTED

ENGINEERS WITH foreign and domestic experience in design and maintenance of air-craft desire Latin American connections with airlines or manufacturing concerns. Please write P. O. Box 955, Santa Monica, California.

REBUILDING

AIRCRAFT BATTERIES rebuilt. New Plates and separators. Your case cover and costs. Let us quote. Bowers Battery Mfg. Co., Inc., Reading, Fa.

FOR SALE

PARACHUTES FOR SALE: All types new and used, Joe Crane & Company, 99 Main Street. used, Joe Crane & Company, 99 Main Street, Mincela, L. I., New York, Garden City 5379.

DESIGN ENGINEER FOR AIRCRAFT GEARING

The gear manufacturing division of an old, established concern, located in Pitts-burgh will consider for placement a qualified gearing apparatus design engineer, who has specialized in the design of various types of aircraft gears and component

Write stating experience, qualifications, and present status. Enclose photograph.

P-856, Aviation 810 West 41nd St., New York 18, N. Y.

FOR SALE

NEW TIRES: \$.00x4, 6.00x8, 1.00x4, 4-ply \$11.75. Tubes \$3.25. We wholesale and carry large stocks. Propellers, spark plugs, batteries, taliwheel assemblies, windshield proalin, dope, fabric. Bob Trader Aero Supply Municipal Airport, Pittsburgh, Pa.

WANTED ENGINEERS MACHINE DEVELOPMENT

Graduate engineer or equivalent, experienced in the design and development of special and experimental machines. Men with creative ability required, experienced in such lines as automatic, semi-automatic, or ordnance equipment.

Must be thoroughly acquainted with modern methods and shop practices and capable of developing new ideas in conjunction with modern mechanical laboratory facilities.

State age, marital status, details of education, experience, draft status, present salary and salary expected. Enclose recent photograph or snapshot.

Post-war opportunity.

Applicants must be able to obtain Statement of Availability.

E. I. du Pont de Nemours & Company, Inc., Personnel Division. Wilmington 98, Delaware.

NEEDED IMMEDIATELY

Aircraft Power Plant Staff Engineer

Minimum five years' experience on power plant design and thorough knowledge of thermodynamics.

Aircraft Production Cost Estimator Aircraft Engineers

Experienced zerodynamacists, stress analysts, weight engineers, layout deaftsmen and senior detailers, Applicants must comply with WMC regulations. Write full details of qualifications to

McDONNELL AIRCRAFT CORP. 1703 Locust St. St. Louis 3, Missouri

(Additional Position Vacant adop opposite page)

AVIATION'S MARKET PLACE

Aircraft Men Wanted DESIGNERS LAYOUT MEN DRAWING CHECKER

with aircraft engineering experience **Engineering Mathematician**

Jobs immediately available for men to work on high output arcraft engine. A long range project of a rapidly expanding department of an eld established company.

P-885, Aviation 526 North Michigan Ave., Chicago 11, Ill.

Our Flying Representatives are ready to fly to your airport to discuss with you personally the

SNYDER "OPERATOR-DEALER" PROGRAM

for the retailing of nationally known aircraft supplies, Write or wire

SNYDER AIRCRAFT CORPORATION

DENVER CHICAGO
1525 Broadway Municipal Airport COLUMBUS, OHIO Sullivant Avenue Airport

ust say:

"Information, please"

whenever you need products or services not advertised in a particular issue of this magazine.

Each issue is only part of the complete service we are organized and glad to render to reader and advertiser, alike. We want you to consider this publication your primary source of information in this field.

AVIATION

330 West 42nd St., New York

OUTSTANDING AUTHORITA-

ENCYCLOPEDIC AVIATION DICTIONARY

by CHARLES A. ZWENG

Member, Institute of Aeronautical Sciences Author of Radio & Instrument Flying, etc.

A new Enclyclopaedic Aviation Dictionary by the well known author-bristling with new aviation terms-and thousands of other words defined in ZWENG'S AVIATION DICTIONARY. The publishers congratulate the author for this, his latest contribution to aviation. This splendid volume is bound in maroon leatherette with gold lettering.

Only \$6.00 postpaid or C.O.D.

PRACTICAL MANUAL OF THE E-68 COMPUTER: By Allan C. Zweng, More than 400 problems explained and illustrated. Blue and Gold Deluxe binding, Unly \$2,00 postpaid,

New Dead Reckoning Equipment

For Defense of Land, Sea and Air

AADIO and INSTRUMENT FLYING: By Charles A. Zeong, Instructor, C. S. Air Cores, New 4th Edition covering new important material. Written especially a present the pilot for government cashination for "instrument rating," Endio-Telephane Fermi in chuled with Meteorology, Radio-Crientation, left-days, off-course and alternate airport problems. Only St. Int. bestmid.

CELESTIAL NAVIGATION—complete equipment consisting of Air Navigation Note Book and Navigation Plotter. Simplified Celestral Navigation, Air Almacac Line of Position Book, and Illylness Stor Chart; all 6 thems only \$11.75 postpand or C.O.O.

AERONAUTICAL TRAINING. Just off the press. New enlarged edition. For the first time shows separate sections containing Typical Private Pilot and Commercial Pilot "Multuple Choice Examinations." \$3.00 postpaid or C.O.D.

GROUND INSTRUCTOR. Written for the student pre-taining for "Ground Instructor figuring." Excellent for class work, Covers Navigation, Meteorology, Aircraft and Theory of Flight, Engines and Civil Air Regula-tion, 23.00 postpaid or C.O.D.

GROUND INSTRUCTOR RATING. Just published, Contains Typical "Mairiple Charce" examinations on Navigation. Materials of Arrest and Theory of Flight, Engines and CAR, Komenchatter and avisiting dictionary in bank of book. It's new and different complishing you cannot afford to be without, \$3.00 to the purchased in combination with "Ground Institute" for \$5.00.

APPLANE and ENGINE MECHANICS: Examinations. New mathentic Quiz Book now covers the new Typical Multiple Choice examinations fally illustrated with necessary diagrams. Used by Lockweed, Dong Lockweed, D

Celestial Air Navigation Training

Prepare now for this important place of Air Defense our stadents are now air navigators and instructor in unrous quarters of the world.

Write for Information



PAN AMERICAN NAVIGATION SERVICE DEPT .- M 12021 Ventura Blvd., N. Hollywood, Calif.

Reesevelt Fleid, L. I.

EXPERIMENTAL WORK MODIFICATIONS

Specialists in Manufacturers of Wood & Metal Airplane Parts

Government Approved Station 115

ANODIZING OF ALUMINUM HARD CHROMIUM PLATING

Philadelphia Rust-Proof Co. 3217 Fronkford Ave.

AVIATION SCHOOLS

PROFESSIONAL SERVICES

LANCATER, ALLWINE & ROMMEL Registered Patent Attorneys

Booklet — "General Information Concerning Inventions & Patents" and "Fee Schedule" sent without obligation

Patents-Copyrights-Trade-Marks Suite 452 815-15th St. N.W., Washington 5 D. C.

AERONAUTICAL ENGINEERING

DEGREE IN 27 MONTHS

Qualify in Aeronautical Engineering at Indiana Tech. B. S. degree in 27 months. Competent instruction. Thorough, intense, practical program. New, modern Wind Tunnel. Prop courses without extra charge. Aeronautical industry rapidly expanding. Companies need engineers, Attractive appointments for Graduates. Government approved for G. I. bill. Enter Doc., Murch, June and Sept. Tuition and living costs low. Self-help opportunities. Also B.S. degree courses in 27 months in Chemical, Civil, Electrical, Me-27 months in Chemical, Civil, Electrical, Me-chanical and Radio Engineering, Catalog and list of successful graduates on request,

INDIANA TECHNICAL COLLEGE 1012 E East Washington Blvd., Fort Wayne 2, Ind.

SEE US FOR NEW - USED - ALL TYPES - SALES - REPAIR - INSTALLATION - COMPLETE STOCK STANDARD AIRCRAFT EQUIPMENT COMPANY

Approved Repair Station 188

Henger "D", Roosevelt Field, Mineola, L. I., N. Y.

Garden City 8783

ADVERTISERS IN THIS ISSUE

Acheson Colloids Corp. Insert 303 Adel Precision Products Corp. 74 Aeronca Aircraft Corp. 387 A. Y. McDonald Mfg. Co. 439 Air Associates, Inc. 389 Air Commications, Inc. Insert 371 Aircraft Accessories Corp. 40-41 Aircraft Fitting Co., Inc. 64 Aircraft Screw Products Co., Inc. 53 Aircraft Screw Products Co., Inc. 53 Aircraft Standard Parts Co. 345 Aircraft Tools, Inc. 97 Air Reduction Sales Corp. 348 Allen Co., Inc., L. B. 450	Chicago Pneumatic Tool Co	Govro-Nelson Co
Allied Products Corporation	Cook Electric Co	Hallicrafters Co
Ampro Metal, Inc	Danly Machine Specialties, Inc. 103 Darnell Corp., Ltd. 243 Dearborn Gage Co. 278 Delco Radio 253 Delco Remy 419 Diamond Tool Replacements Co. 441 Diefendorf Gear Corp. 450 Doile Valve Co., The 431 Doubleday, Doran & Co. 439 Dowglas Aircraft Co., Inc. 39 Dow Chemical Co. Third Cover Dow Corning Corp. 204 Drafto Corp. 408	Hollingshead Corp., R. M
Aviation Corp., The—Lycoming Division 226 Aviation Market Place	Dravo Corp. 442 Dremel Mfg. Co. 277 Dugas Engineering Corp. 274 Dumore Co., The. 26-27 Du Pont de Nemours Co., Inc., E. I. 78-79 Dykem Steel Co., The. 451	Independent Pneumatic Tool Co
Baldor Electric Co. 451 Barco Mfg. Co. 326 Bar Ray Products, Inc. 451 Bartlett Hayward Division 405 Bausch & Lomb Optical Co. 255 Bay State Abrasive Products Co. 45 Behr-Manning Corp. 242 Bell Aircraft Corp. 198 Bellanca Aircraft Corp. 410 Bendix Aviation Corp. 4-12-13-114 Back Cover	Eagle Parachute Co	Jack & Heintz
Bendix Eclipse Aviation		
Barry Brothers 96 B. G. Corporation, The 391 B. H. Aircraft Co. 430 Blanchard Machine Co., The 68 Bolton Mfg. Co. 83 Bonney Porge & Tool Works 383 Booth Felt Co., The 295 Boots Aircraft Nat Corp. Insert 354 Bower Roller Bearing Co. Insert 285 Breese Corp., The 196 Briggs & Stratton Corp. 269 Bristol Company, The 456 Brush Development Co., The 334 Bryant Chucking Grinder Co. 25 Buffalo Pattern Works 409 Bunting Brass & Bronze Co., The 95 Burgess Norton Mig. Co. 84 Burndy Engineering Co., Inc. 31 Bush Mfg. Co., The 375	Fairchild Camera & Instrument Corp., 314 Fairchild Engine & Airplane Corp., 220 Fawcett Publications 439 Federal Aircraft Works, 450 Federal Bearings Co., Inc., The 62 Federal Telephone & Radio Corp., 359-397 Felt Products Mfg. Co., 444 Ferdinand & Co., Inc., L. W., 450 Ferguson, Inc., Harry, 333 Firestone Aircraft Co., 365-367 Fischer & Porter Co., 80 Fitzgerald Mfg. Co., 449 Flex-o-tube Co., Inc., L. Marry, 322 Foote Bros. Gear & Machine Corp., 425 Formica Insulation Co., 81 Frasse & Co., Inc., Peter A., 305 Fulmer Co., C. Allen., 342 Fulton Sylphon Co., The, 343	Kearney & Trecker Corp. 10 Kelite Products, Inc. 11 Kellett Aircraft Corp. 38 Kelley Koett Mfg. Co. 10 Kenyon Instrument Co., Inc. 376-37 Kestor Solder Company 35 Kouffel & Esser Company 35 Kidde & Co., Inc., Walter 37 Kinner Motors, Inc. 6 Koehler Aircraft Products Co. 30 Kohler Company 40 Kold Hold Mfg. Co. 24 Kollsman Instrument Co. 6-29 Koppers Co. 40
Cal-Aero Technical Institute	Garrett Corp., The	Lackawanna Leather Co. 32 Ladish Drop Forge Co. Lamb Electric Co. The 22 Laminated Shim Co., Inc. 23 Lamson & Sessions Co. 44 Lear, Inc. Lectroetch Co. 33 Lects & Northrop Co. 33 Liberty Mirror Division Libbey-Owens- Ford Glass Co. 23 Linde Air Products Company, The 40 Linear Packing Co. 44 Lockheed Aircraft Corp. Insert 209-21 Logan Engineering Co. Lord Mfg. Co. 25 Lord Raymond Corp. 25

AVIATION, December, 1944

ADVERTISERS IN THIS ISSUE

McGill Mi McGraw-H Magnaflux Mahon Co Mallory & Manufactu Martin Rc Marquette	Aircraft Corp. Insert ig. Co. 2 iii Book Co. 437-4 Corp. 3 R. S., The 2 Co., Inc., P. R. 3 cockwell Corp. 418-4 Metal Products Co. 3		Tubular Micrometer Co
Mercury A Meriam In Metal Spe Michigan Micro-Swit Milford Ri Moraine I	o., The	Roberts Rubber Co., Weldon	Udylite Corporation, The
New Englander York Niagara M Nichols & Norgren C Norma Ho	crew & Mfg. Co325-4 and Screw Company4 Air Brake Corp., The3 achine & Tool Co4 Sons, W. H	Schrader Sons Co., A. 351	Van Der Horst Corp. of America
Ohmite M Oloffson T Onen & So Oster Mfg.	less Tube Company	9 Southington Hardware Mfg. Co	Waldes Koh-i-noor, Inc. 48 Walker Turner, Inc. 23 Walter Motor Truck Co. 109 Ward Leonard Electric Co. 442 Wayne Pump Co., The 247 Weldon Tool Co. 430 Wellman Bronse & Aluminum Co. 341 Western Automatic Machine Screw Co. 293 Western Felt Works 435 Westinghouse Electric & Mig. Co. 44-52-403 Where To Buy. 450 Whitaker Cable Corp. 65 Whitehead Stamping Co. 451
Pacific Gea Packard E Parker Ap Parker Kal Patent Sca Pawtucket Peerless P Permofius Pesco Prod Pheoil Mfg Phillips Pe	glasering Corp. 3 If & Tool Works	Texas Company	Whiting Corp. 427 Williams & Co., J. H. 443 Wilson Co., The H. A. 415 Wittek Mfg. Co. 401 Wolfe & Mann Mfg. Co., The 362 Wolverine Bolt Co. 456 Wright Aeronautical Corp. Insert 353 Wrought Washer Mfg. Co. 448 Wyman Gordon 288
Piper Airca Pittsburgh Plomb Too Pressed Ste	raft Corp	7 Titeflex, Inc	Zephyr Mfg. Co
		* * *	


PROFESSIONAL SERVICES453

CLASSIFIED DISPLAY ADVERTISING

(GLASSIFIED DISPLAY ADVERTISING)	Edo Aircraft Corp du Pont de Nemours & C	
EMPLOYMENT (Positions Wanted and Vacant)452, 453	Ino., E. I. Lancaster, Allwine & Ron mell	
FOR SALE452, 453	Libby, C. J	

st Proof Co. 453 Carp453	Jonnell Aircraft Corp452 American Navigation
t	der Alreraf

AVIATION, December, 1944

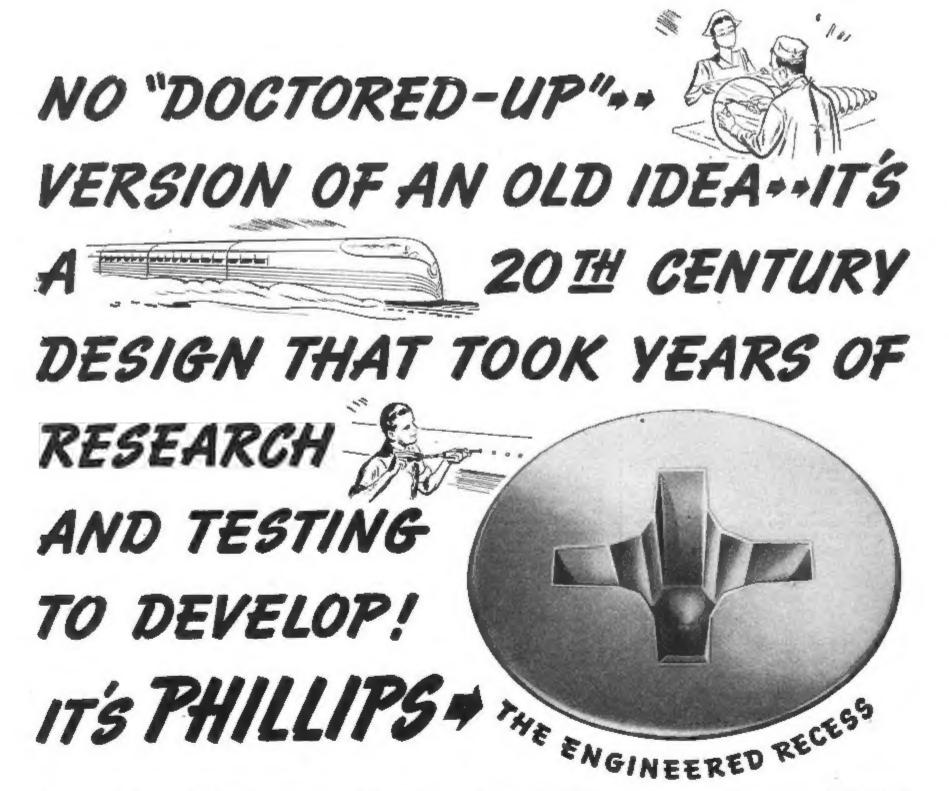

In ease and speed of driving, there is nothing quite like the Phillips Recessed Head Screw.


That's because the Phillips Recess adapted from some older, less satisfactory type of recess. It's an engineered recess . . . with years of costly testing and research behind each design feature.

As a result, every angle, every flat axis of the screw. plane, every dimension of the Phillips Recess makes a definite contribution to easier, faster, more efficient screw driving.

The recess walls are angled just right to eliminate fumbling starts, to let workers utilize their full turning power. The 16 flat planes are prowas developed from scratch-not just vided to hold even worn drivers snugly. And the depth of the recess is exactly figured to give unusual strength to Phillips Screw Heads, and make it easy to keep Phillips Bits and Drivers lined up with the

To Make Wartime Quotas and Peacetime Profits . . .

get the faster starting - faster driving-stronger, better-looking fasten-



ings that only screws with Phillips

Recessed Heads can give you! All

over the country, manufacturers are

switching to Phillips Recessed Head

Screws to speed up assembly and cut

costs. Give your assembly depart-

ment "a shot in the arm" - change to

Phillips Screws, too, Available in all

head styles, types, and sizes!




WOOD SCREWS . MACHINE SCREWS . SELF-TAPPING SCREWS . STOVE BOLTS



The H. M. Narper Co., Chicago, III. International Screw Co., Petroit, Mich. The Lomson & Sessions Co., Cleveland, Ohlo Manufacturers Screw Products, Chicago, III. Milford Rivet and Machine Co., Mifford, Conn. The National Screw & Mig. Co., Clovaland, Ohlo New England Screw Co., Koone, N. N. Parker-Kalen Corp., New York, N. Y. Pawtucket Screw Co., Pawtucket, R. I.
Phroft Manufacturing Co., Chicago, III.
Reading Screw Co., Morristown, Pa.,
Russell Burdsell & Ward Solt & Nut Co., Port Chester, N. Y.
Scovill Manufacturing Co., Waterville, Conn.,
Shakeproof Inc., Chicago, III.
The Southington Hardwara Mig. Co., Southington, Conn.,
Wolverine Boit Co., Ostroit, Mich.

sharp point.

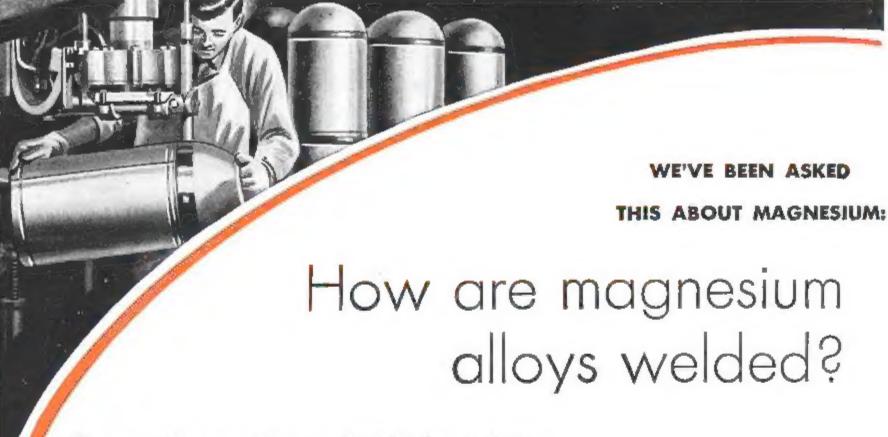

Gas, are and spot welding are all efficiently practicable with Dowmetal Magnesium Alloys. The welding of magnesium alloys has been used in regular production of parts and assemblies for several years, a fact which has greatly broadened the usefulness, in many industrial fields, of this valuable weight-saving metal-for magnesium is the lightest of all structural metals.

Any good welder can join magnesium alloys as readily as he can other metals. Gas welding is well adapted to the making of butt welds; fluxes are available for this type of weld. In arc welding (illustrated at the right) a tungsten electrode is used, and the weld area is shielded from air by a screen of inert gas, such as helium or argon, thus eliminating the need of fluxes. Lap, butt, edge and fillet welds can be made by this method. Magnesium alloys can readily be spot welded to each other. Less current density

is required because of the lower electrical conductivity of magnesium alloys in comparison with aluminum. Clean metal and clean electrodes will insure a better spot weld.

The comprehensive facilities of Dow's own fabrication shops, supplemented by the full experience and specialized knowledge which naturally accrue to the pioneer and leading producer of magnesium, are at your disposal. Inquiries regarding the welding of Dowmetal-to be done in your plant or by Dow-will receive prompt and thorough attention.


III Magnesium



THE METAL OF MOTION

MAGNESIUM DIVISION . THE DOW CHEMICAL COMPANY MIDLAND, MICHIGAN

Houston . San Francisco . Los Angeles . Seattle

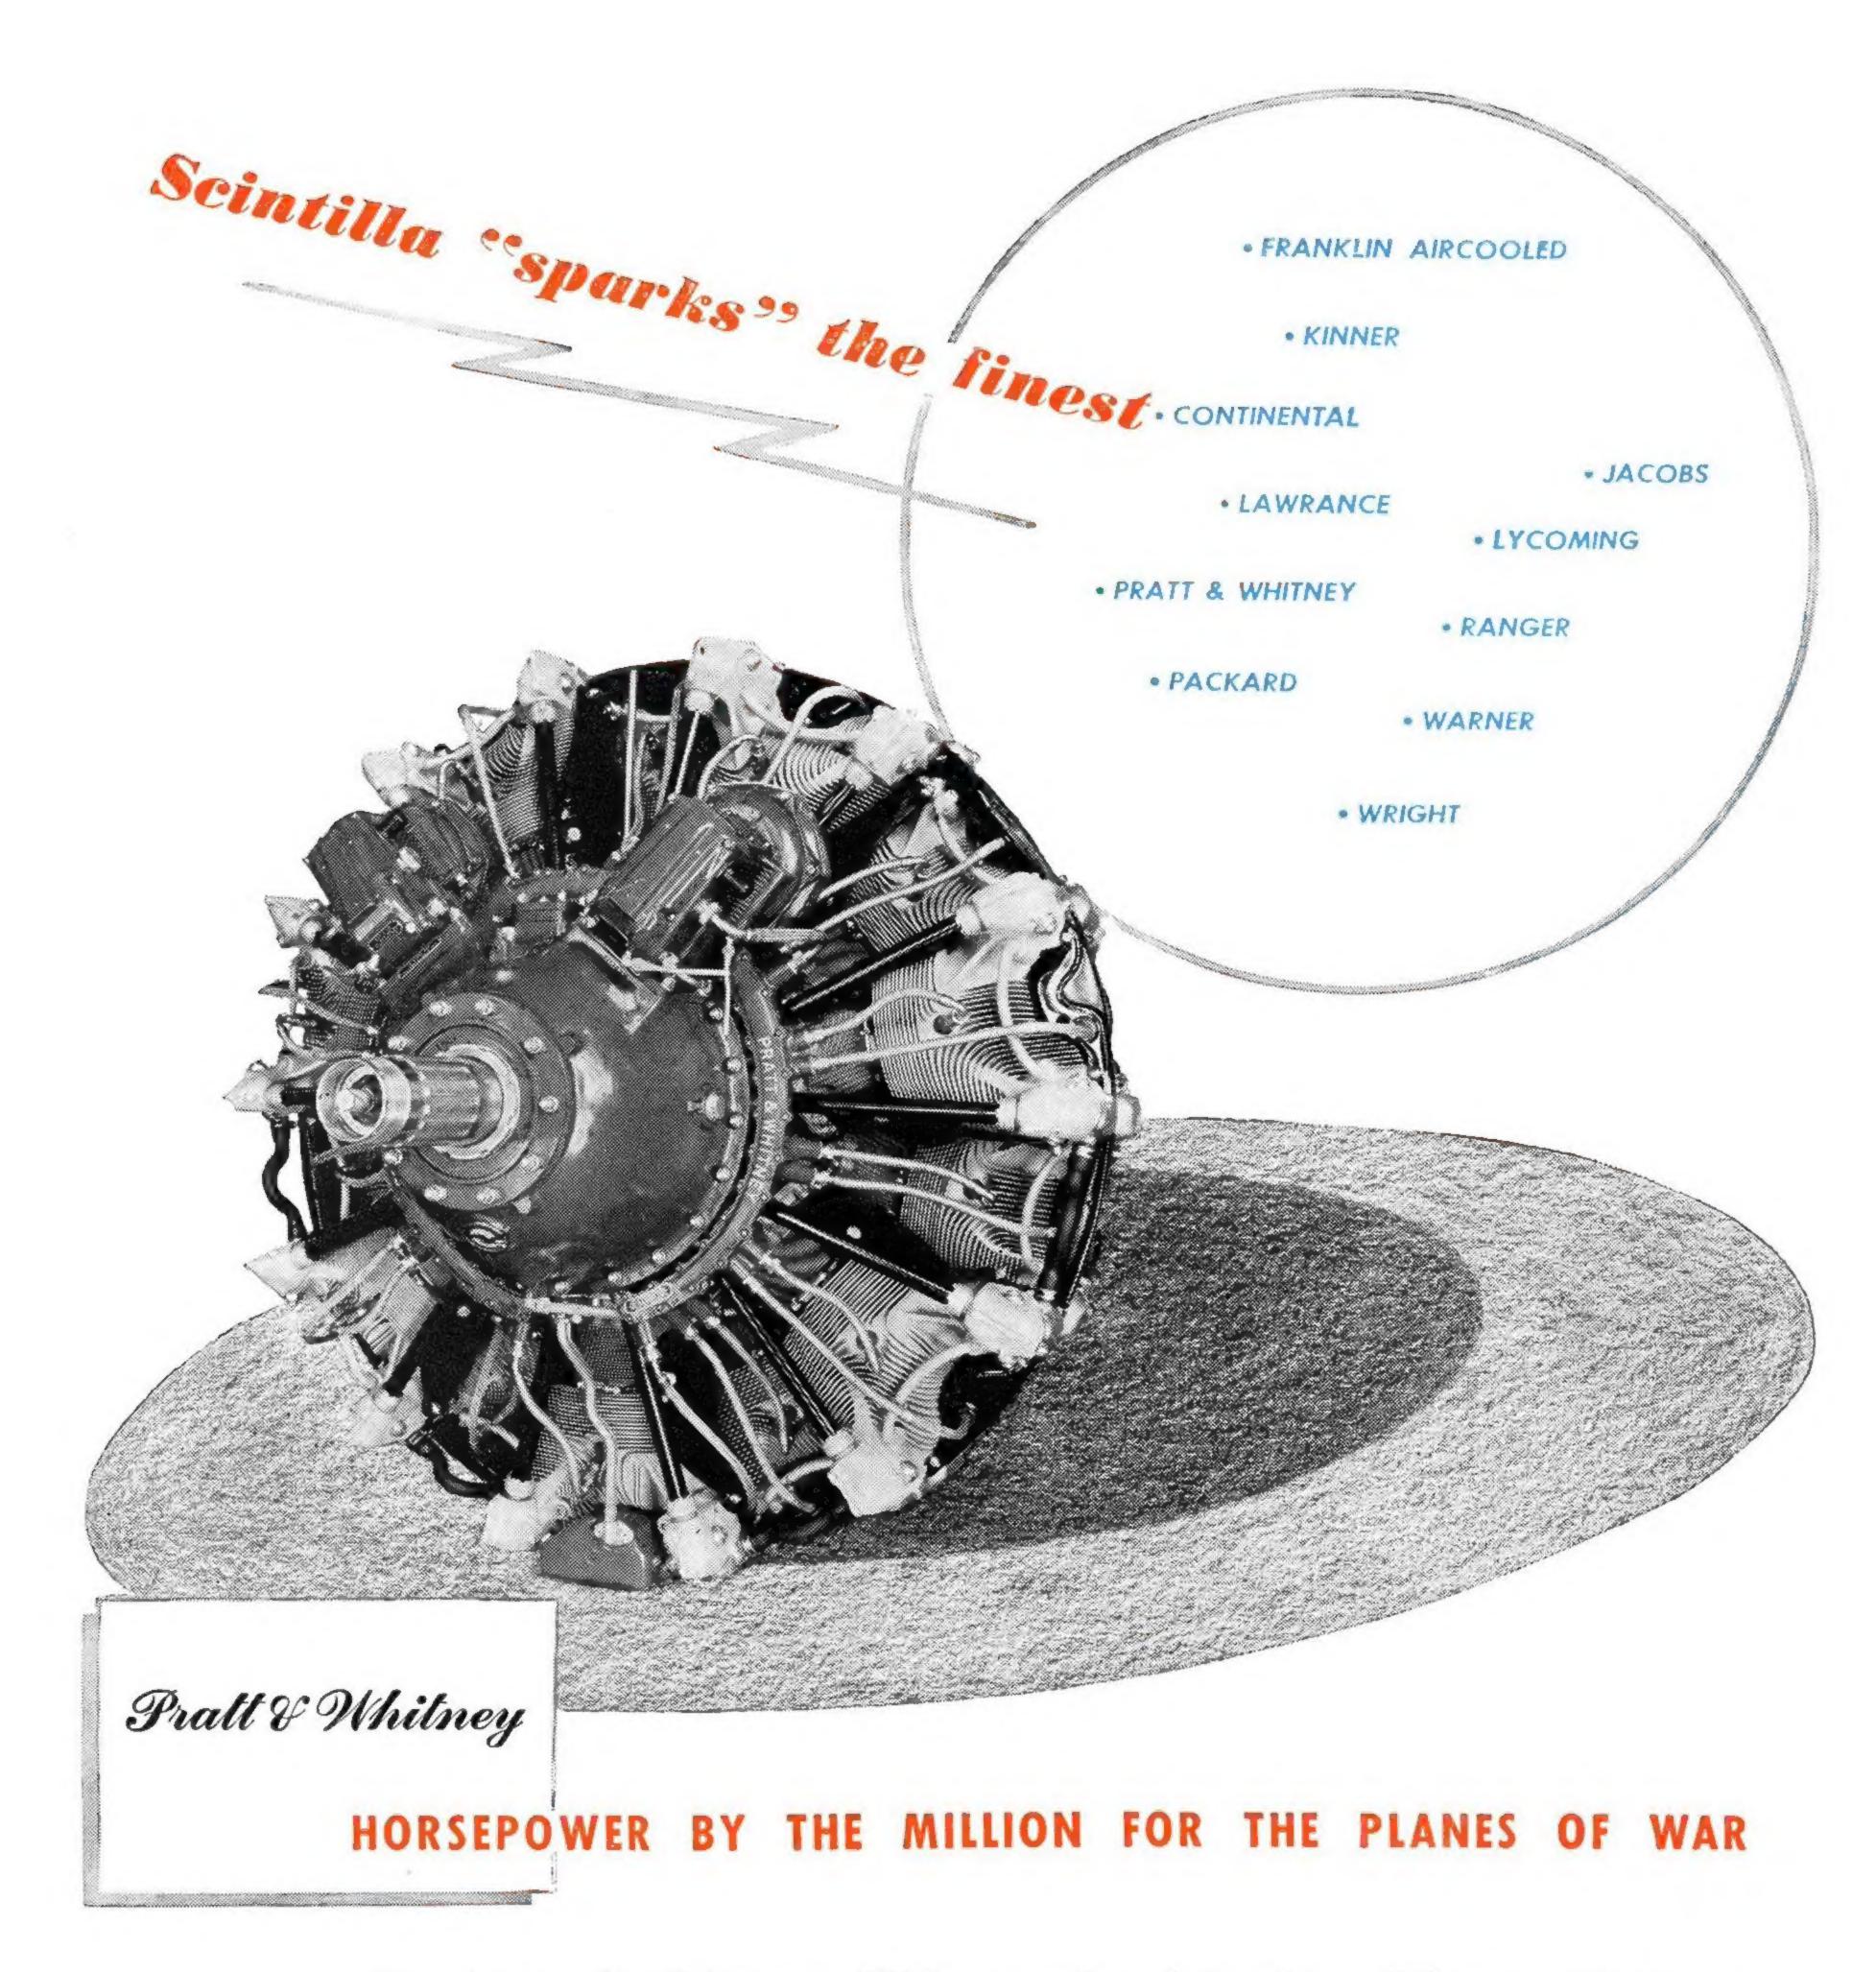

On thousands of Pratt & Whitney-equipped bombers, fighters, trainers, cargo planes, and patrol craft, Bendix Scintilla aircraft ignition equipment delivers the vital spark.

"BENDIX-SCINTILLA" AND "SCINTILLA" ARE TRADEMARKS OF BENDIX AVIATION CORPORATION

SCINTILLA MAGNETO



Bendix AVIATION CORPORATION SIDNEY, N. Y.